



# SAW Components

Data Sheet B7802

Data Sheet

An abstract, grayscale background graphic featuring a globe with a grid pattern. Overlaid on the globe is a large, stylized, 3D-effect word "EPCOS" in a light gray color, tilted diagonally across the lower half of the page.

EPCOS

SAW Components	B7802
Low-Loss Filter for Mobile Communication	1880,00 MHz

Data Sheet




Chip sized SAW package

## Features

- Low-loss RF filter for mobile telephone PCS systems, transmit path
- Usable passband 60 MHz
- No matching network required for operation at 50  $\Omega$
- Ceramic package for **Surface Mounted** technology (**SMT**)

## Terminals


- Ni, gold-plated

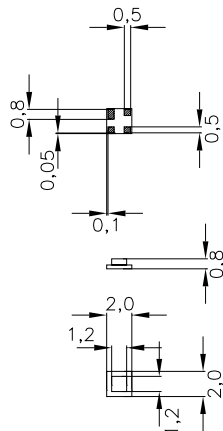

Dimensions in mm, approx. weight 0,01 g

## Pin configuration

2	Input
1	Input - ground
3	Output
4	Output - ground



Type	Ordering code	Marking and Package according to	Packing according to
B7802	B39192-B7802-A510	C61157-A7-A63	F61074-V8099-Z000

Electrostatic Sensitive Device (ESD)

## Maximum ratings

Operable temperature range	$T$	- 30/+ 80	$^{\circ}\text{C}$	source and load impedance 50 $\Omega$ peak power of GSM signal, duty cycle 1 : 3 CDMA signal
Storage temperature range	$T_{\text{stg}}$	- 40/+ 85	$^{\circ}\text{C}$	
DC voltage	$V_{\text{DC}}$	0	V	
Input power max.	$P_{\text{IN}}$	10	dBm	
		8	dBm	



### Characteristics

Operating temperature range:  $T = +25 \pm 2^\circ \text{C}$   
Terminating source impedance:  $Z_S = 50 \Omega$   
Terminating load impedance:  $Z_L = 50 \Omega$

			min.	typ.	max.	
<b>Center frequency</b>	$f_c$		—	1880,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$					
1850,0 ... 1910,0	MHz		—	3,0	3,6	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$					
1850,0 ... 1910,0	MHz		—	1,5	2,1	dB
<b>VSWR</b>						
1850,0 ... 1910,0	MHz		—	2,0	2,2	
<b>Attenuation</b>	$\alpha$					
10,0 ... 950,0	MHz		15,0	17,0	—	dB
950,0 ... 1050,0	MHz		14,0	15,0	—	dB
1050,0 ... 1580,0	MHz		16,0	18,0	—	dB
1580,0 ... 1720,0	MHz		25,0	28,0	—	dB
1720,0 ... 1780,0	MHz		21,0	23,0	—	dB
1780,0 ... 1800,0	MHz		18,0	20,5	—	dB
1800,0 ... 1830,0	MHz		10,0	20,0	—	dB
1930,0 ... 1990,0	MHz		15,0	24,0	—	dB
1990,0 ... 2400,0	MHz		25,0	28,0	—	dB
2400,0 ... 2800,0	MHz		20,0	24,0	—	dB
2800,0 ... 3500,0	MHz		15,0	18,0	—	dB
3500,0 ... 6000,0	MHz		13,0	15,0	—	dB

**Characteristics**

Operating temperature range:  $T = -30$  to  $+85^{\circ}\text{C}$

Terminating source impedance:  $Z_S = 50\ \Omega$


Terminating load impedance:  $Z_L = 50\ \Omega$

			min.	typ.	max.	
<b>Center frequency</b>	$f_c$		—	1880,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$					
1850,0 ... 1910,0	MHz		—	3,2	4,3	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$					
1850,0 ... 1910,0	MHz		—	1,8	2,8	dB
<b>VSWR</b>						
1850,0 ... 1910,0	MHz		—	2,0	2,2	
<b>Attenuation</b>	$\alpha$					
10,0 ... 950,0	MHz		15,0	17,0	—	dB
950,0 ... 1050,0	MHz		14,0	15,0	—	dB
1050,0 ... 1580,0	MHz		16,0	18,0	—	dB
1580,0 ... 1720,0	MHz		25,0	28,0	—	dB
1720,0 ... 1780,0	MHz		21,0	23,0	—	dB
1780,0 ... 1800,0	MHz		18,0	20,5	—	dB
1800,0 ... 1830,0	MHz		6,0	16,0	—	dB
1930,0 ... 1990,0	MHz		10,0	19,0	—	dB
1990,0 ... 2400,0	MHz		25,0	28,0	—	dB
2400,0 ... 2800,0	MHz		20,0	24,0	—	dB
2800,0 ... 3500,0	MHz		15,0	18,0	—	dB
3500,0 ... 6000,0	MHz		13,0	15,0	—	dB


Data Sheet





Transfer Function(25°C spec)

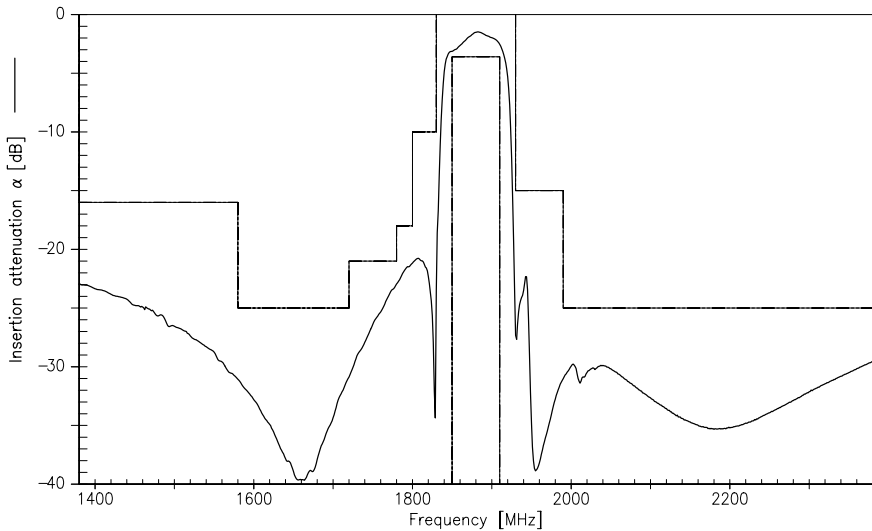

Transfer function (wideband)

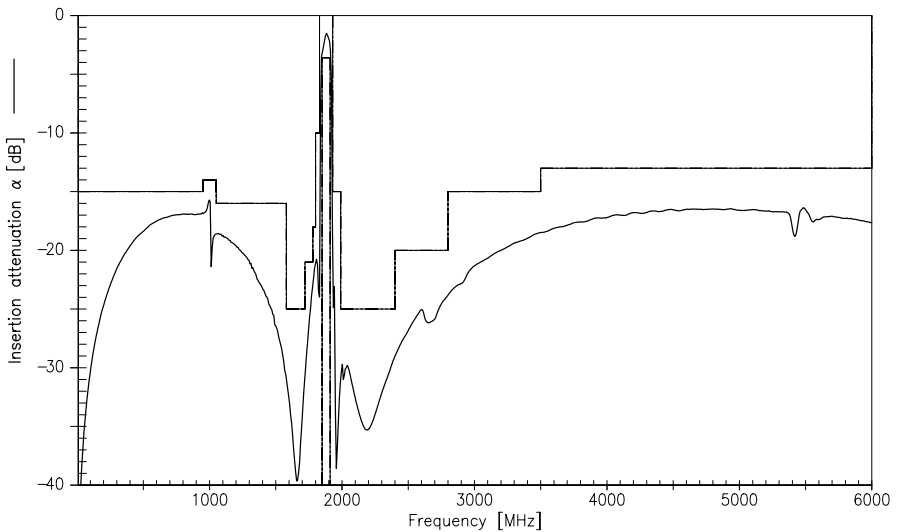

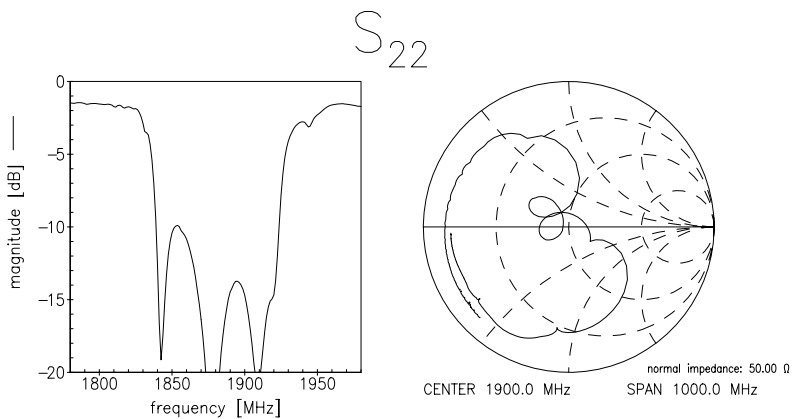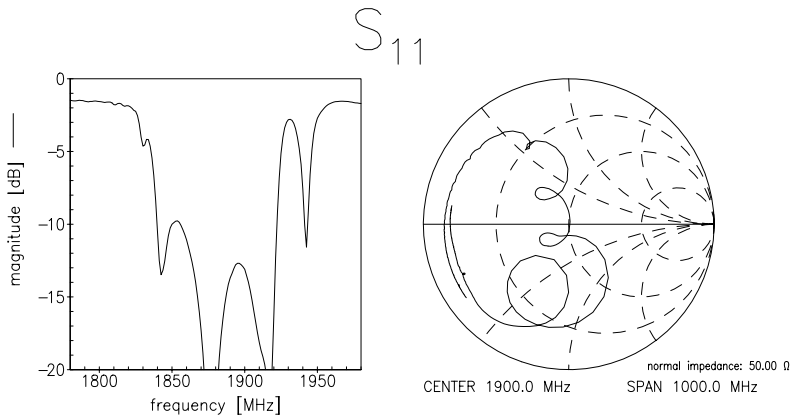

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, OFW E MF**

**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.