



Siemens Matsushita Components

SAW Components

Low Loss Filter for Mobile Communication

B4648
914,50 MHz

Data Sheet


Ceramic package DCC6

Features

- Low loss RF filter for cordless telephone CT1
- High image frequency suppression
- No matching network required for operation at 50 Ω
- Package for **S**urface **M**ounted **T**echnology (**SMT**)

Terminals


- Ni, gold-plated

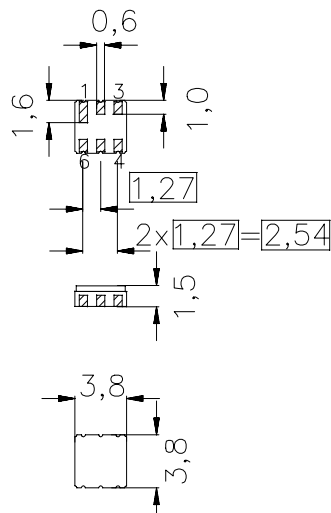

Dimensions in mm, approx. weight 0,07 g

Pin configuration

2	Input
5	Output
1, 3, 4, 6	Ground



Type	Ordering code	Marking and Package according to	Packing according to
B4648	B39911-B4648-Z610	C61157-A7-A41	F61074-V8030-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	0/+ 55	$^{\circ}\text{C}$	
Storage temperature range	T_{stg}	- 40/+ 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	0	V	
Source power	P_{S}	10	dBm	source impedance 50 Ω



Siemens Matsushita Components

SAW Components Low Loss Filter for Mobile Communication

B4648
914,50 MHz

Data Sheet

Characteristics

Operating temperature range: $T = 0\text{ }^{\circ}\text{C}$ to $55\text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\text{ }\Omega$
Terminating load impedance: $Z_L = 50\text{ }\Omega$

		min.	typ.	max.	
Center frequency	f_c	-	914,50	-	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
914,00 ... 915,00 MHz		-	2,7	4,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
914,00 ... 915,00 MHz		-	0,2	1,2	dB
Relative attenuation (relative to $\alpha_{\max}$)	α_{rel}				
871,00 ... 879,00 MHz		35,0	45,0	-	dB
879,00 ... 894,00 MHz		10,0	45,0	-	dB
937,00 ... 960,00 MHz		35,0	50,0	-	dB
Temperature coefficient of frequency	TC_f	-	-30	-	ppm/K




Siemens Matsushita Components

SAW Components Low Loss Filter for Mobile Communication

B4648
914,50 MHz

Data Sheet

Transfer function

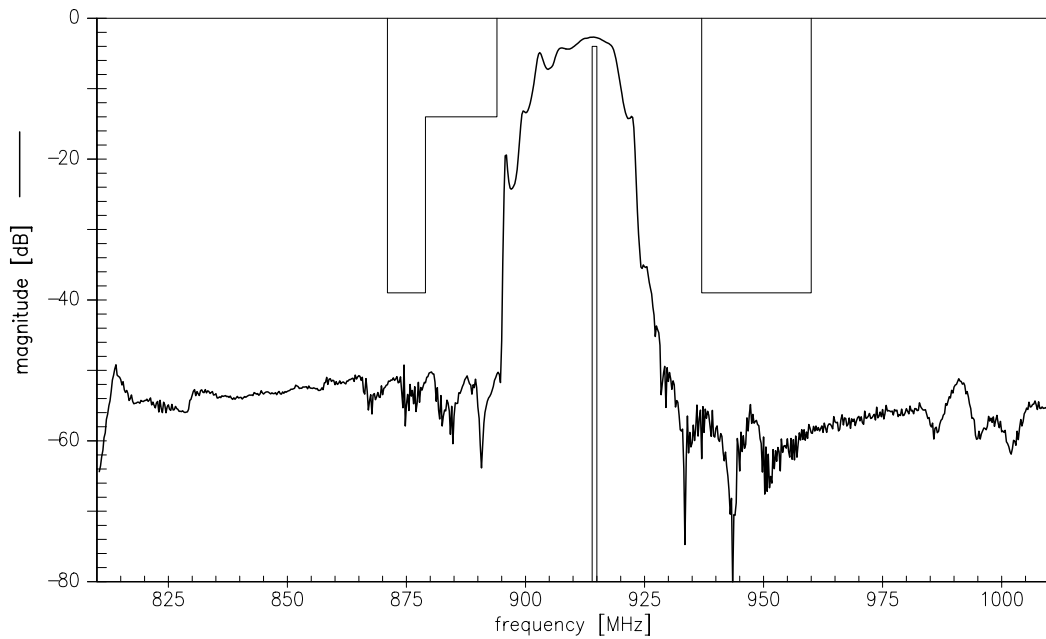

Transfer function (wideband)

