



## NPN/PNP Silicon Digital Transistor Array

- Switching circuit, inverter, interface circuit, driver circuit
- Two (galvanic) internal isolated NPN/PNP Transistors in one package
- Built in bias resistor ( $R_1=10\text{k}\Omega$ ,  $R_2 = 10\text{k}\Omega$ )

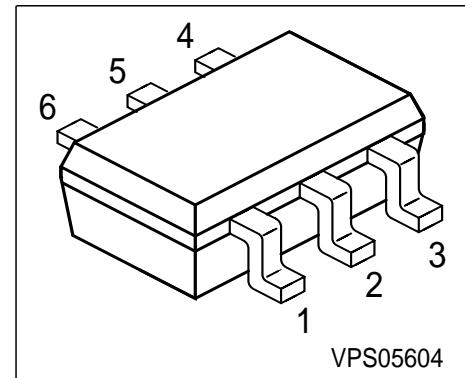


### Tape loading orientation



Marking on SOT-363 package  
(for example W1s)  
corresponds to pin 1 of device

Position in tape: pin 1  
opposite of feed hole side

EHA07193



Type	Marking	Pin Configuration						Package
BCR10PN	W1s	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SOT363

### Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	$V_{CEO}$	50	V
Collector-base voltage	$V_{CBO}$	50	
Emitter-base voltage	$V_{EBO}$	10	
Input on Voltage	$V_{i(on)}$	20	
DC collector current	$I_C$	100	mA
Total power dissipation, $T_S = 115^\circ\text{C}$	$P_{tot}$	250	mW
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-65 ... 150	

### Thermal Resistance

Junction - soldering point <sup>1</sup> )	$R_{thJS}$	$\leq 140$	K/W
---	------------	------------	-----

<sup>1</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics** at  $T_A=25^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Collector-emitter breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	50	-	-	V
Collector-base breakdown voltage $I_C = 10 \mu\text{A}, I_E = 0$	$V_{(\text{BR})\text{CBO}}$	50	-	-	
Collector cutoff current $V_{\text{CB}} = 40 \text{ V}, I_E = 0$	$I_{\text{CBO}}$	-	-	100	nA
Emitter cutoff current $V_{\text{EB}} = 10 \text{ V}, I_C = 0$	$I_{\text{EBO}}$	-	-	0.75	mA
DC current gain 1) $I_C = 5 \text{ mA}, V_{\text{CE}} = 5 \text{ V}$	$h_{\text{FE}}$	30	-	-	-
Collector-emitter saturation voltage1) $I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$	$V_{\text{CEsat}}$	-	-	0.3	V
Input off voltage $I_C = 100 \mu\text{A}, V_{\text{CE}} = 5 \text{ V}$	$V_{i(\text{off})}$	0.8	-	1.5	
Input on Voltage $I_C = 2 \text{ mA}, V_{\text{CE}} = 0.3 \text{ V}$	$V_{i(\text{on})}$	1	-	2.5	
Input resistor	$R_1$	7	10	13	k $\Omega$
Resistor ratio	$R_1/R_2$	0.9	1	1.1	-


**AC Characteristics**

Transition frequency $I_C = 10 \text{ mA}, V_{\text{CE}} = 5 \text{ V}, f = 100 \text{ MHz}$	$f_T$	-	130	-	MHz
Collector-base capacitance $V_{\text{CB}} = 10 \text{ V}, f = 1 \text{ MHz}$	$C_{\text{cb}}$	-	3	-	pF


1) Pulse test:  $t < 300 \mu\text{s}$ ;  $D < 2\%$

**NPN Type**


**DC Current Gain**  $h_{FE} = f(I_C)$   
 $V_{CE} = 5V$  (common emitter configuration)

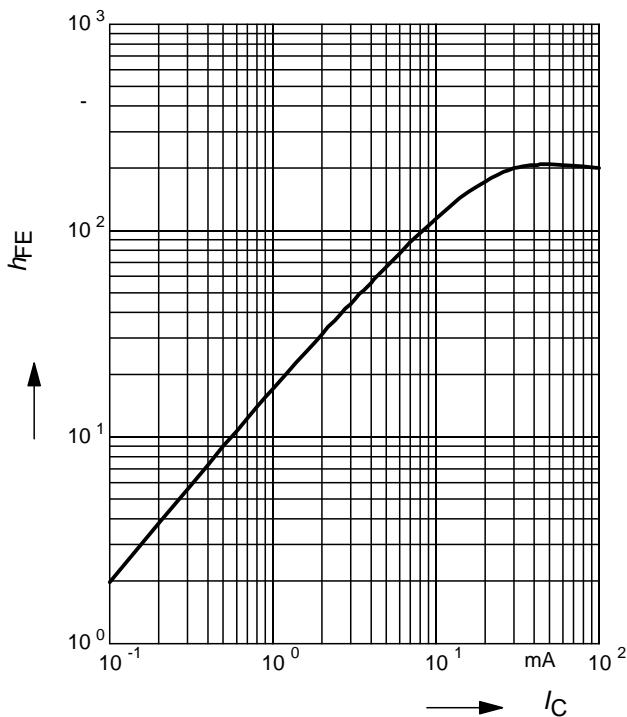


**Input on Voltage**  $V_{i(on)} = f(I_C)$   
 $V_{CE} = 0.3V$  (common emitter configuration)

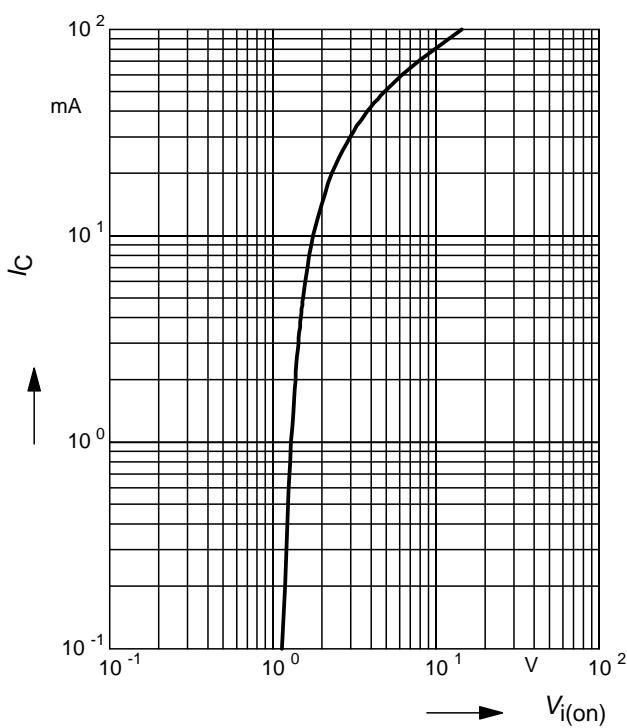

**Collector-Emitter Saturation Voltage**  
 $V_{CEsat} = f(I_C)$ ,  $h_{FE} = 20$

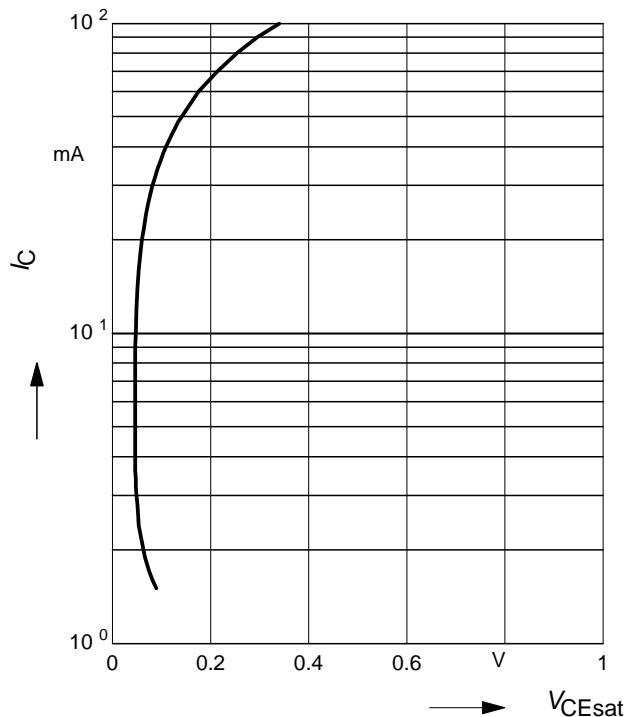


**Input off voltage**  $V_{i(off)} = f(I_C)$   
 $V_{CE} = 5V$  (common emitter configuration)

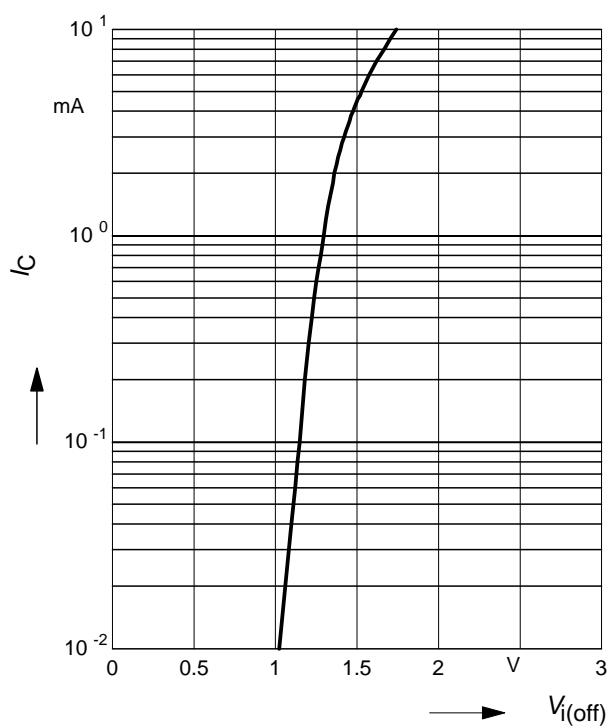


## PNP Type


**DC Current Gain**  $h_{FE} = f(I_C)$   
 $V_{CE} = 5V$  (common emitter configuration)

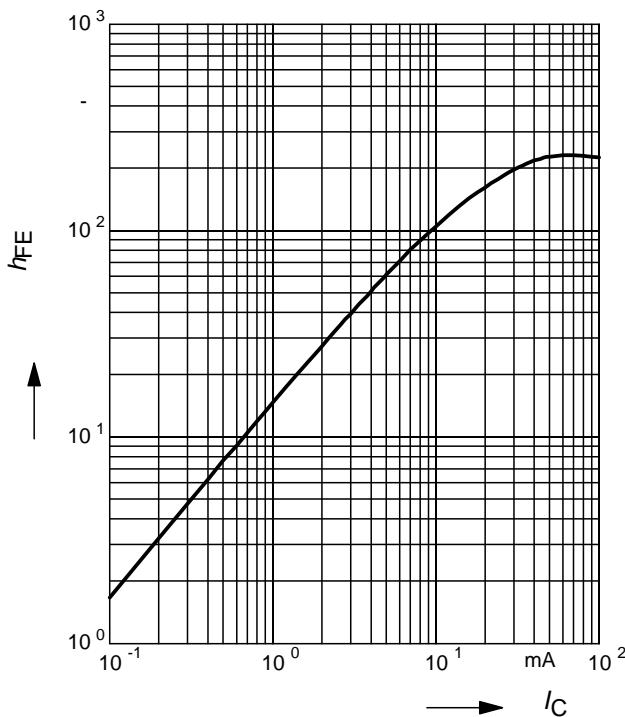


**Input on Voltage**  $V_{i(on)} = f(I_C)$   
 $V_{CE} = 0.3V$  (common emitter configuration)

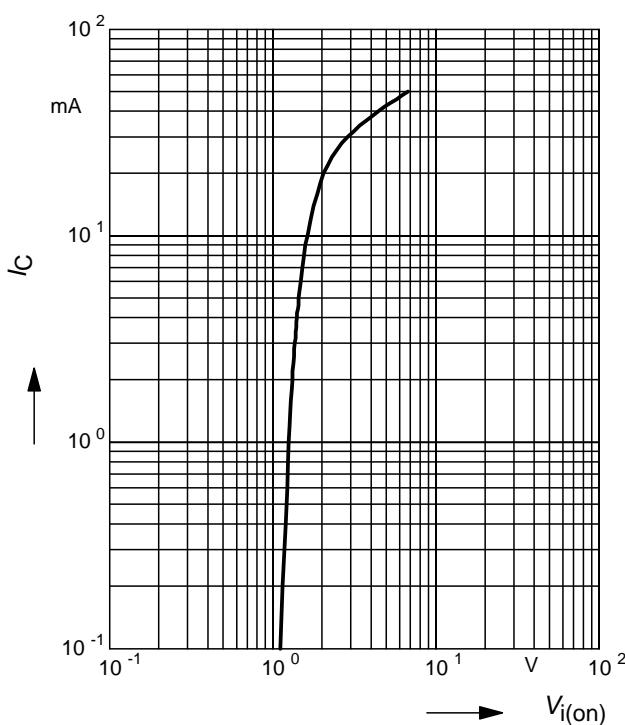


**Collector-Emitter Saturation Voltage**  
 $V_{CEsat} = f(I_C)$ ,  $h_{FE} = 20$

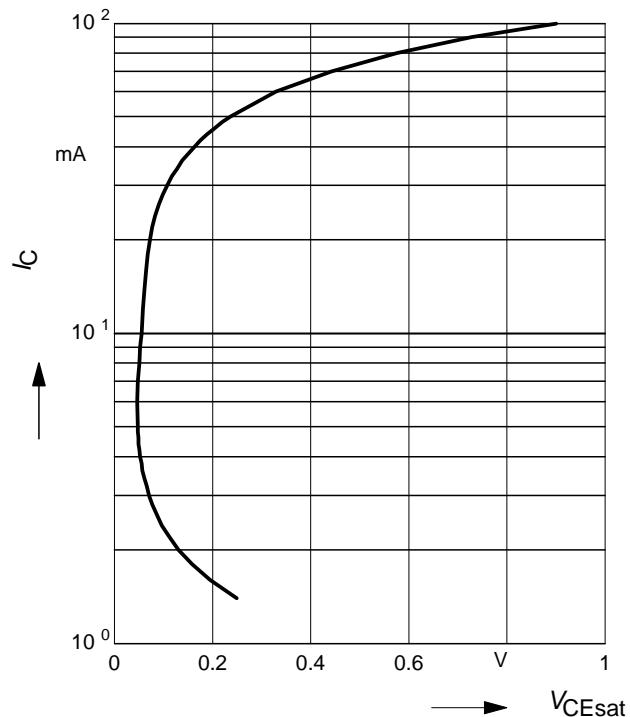


**Input off voltage**  $V_{i(off)} = f(I_C)$   
 $V_{CE} = 5V$  (common emitter configuration)

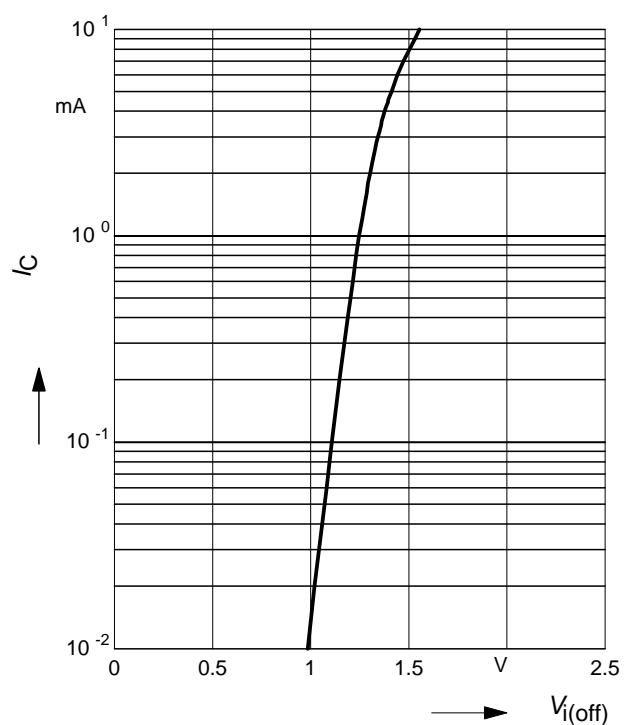

**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

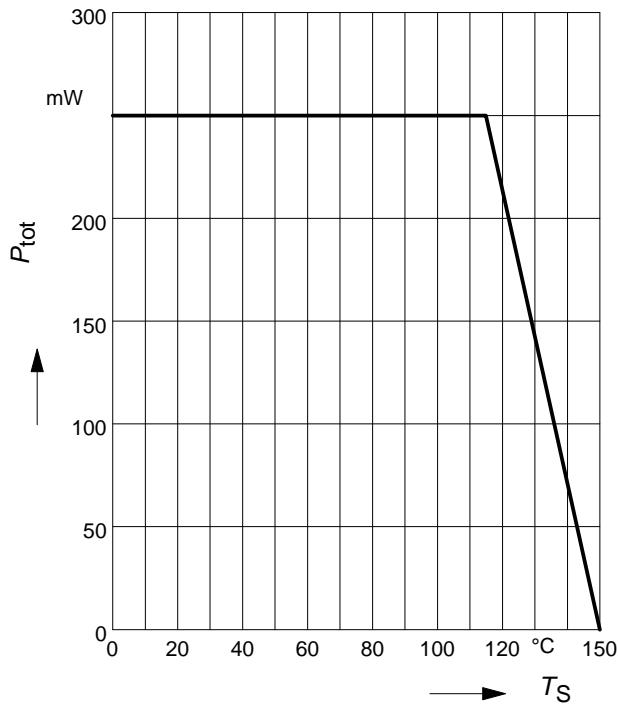

**Permissible Pulse Load  $R_{\text{thJS}} = f(t_p)$**

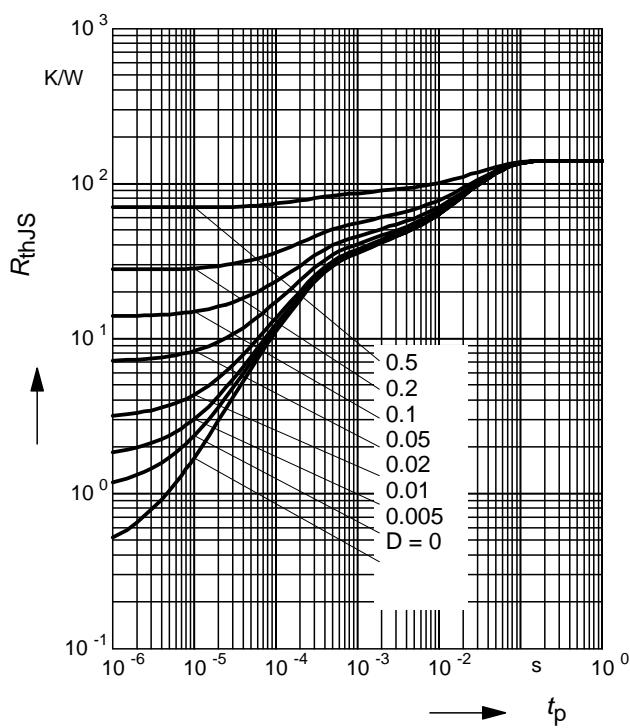

**Permissible Pulse Load**

$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$

