


MECHANICAL DATA

Dimensions in mm (inches)

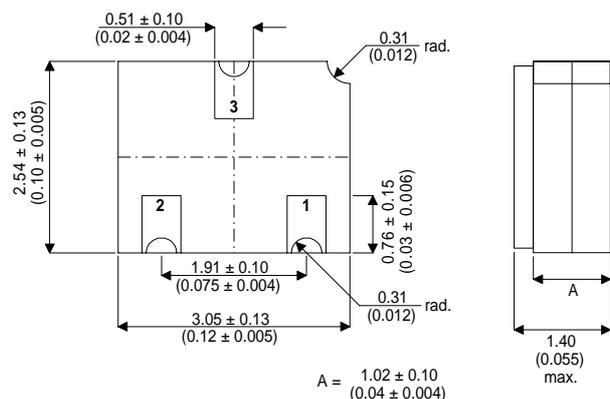

**SCHOTTKY DIODE IN
HERMETIC CERAMIC
SURFACE MOUNT PACKAGE
FOR HIGH RELIABILITY
APPLICATIONS**

**SOT23 CERAMIC
(LCC1 PACKAGE)**
Underside View

PAD 1 — Anode PAD 2 — N/C PAD 3 — Cathode

ABSOLUTE MAXIMUM RATINGS ($T_{MB} = 25^{\circ}\text{C}$ unless otherwise stated)


V_R	Reverse Voltage		30V
I_F	Forward Current ¹	$T_{MB} \leq 25^{\circ}\text{C}$	200mA
		Derate @ $T_{MB} > 25^{\circ}\text{C}$	See Figure 1
I_{FM}	Peak Forward Current		600mA
T_J	Maximum Operating Junction Temperature		-55 to +135°C
T_{STG}	Storage Temperature Range		-65 to +175°C

ELECTRICAL CHARACTERISTICS ($T_A = 25^{\circ}\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_R Reverse Current	$V_R = 25\text{V}$			2	μA
	$V_R = 25\text{V}$ $T_A = 85^{\circ}\text{C}$			100	
V_F Forward Voltage	$I_F = 1\text{mA}$			0.32	V
	$I_F = 10\text{mA}$			0.40	
	$I_F = 30\text{mA}$			0.50	
C Capacitance	$V_R = 1\text{V}$ $f = 1\text{MHz}$			10	pF
t_{rr} Reverse Recovery Time	$I_F = 100\text{mA}$ to $I_R = 10\text{mA}$ $R_L = 100\Omega$			5	ns

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

Figure 1 – Power Derating Curve

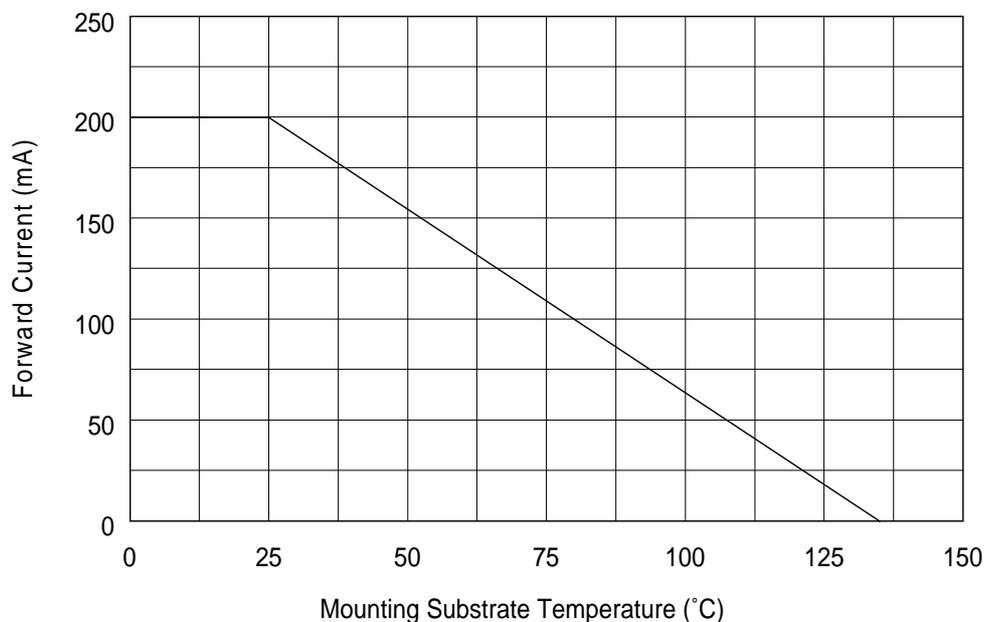

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.