



BVB-B4401F

DESCRIPTION



Dice Material : GaP/GaP Yellow Green

Light Color : Green Color

Reflector Color : Water Transparent


PACKAGE CONFIGURATION

Tolerance : ± 0.2 mm

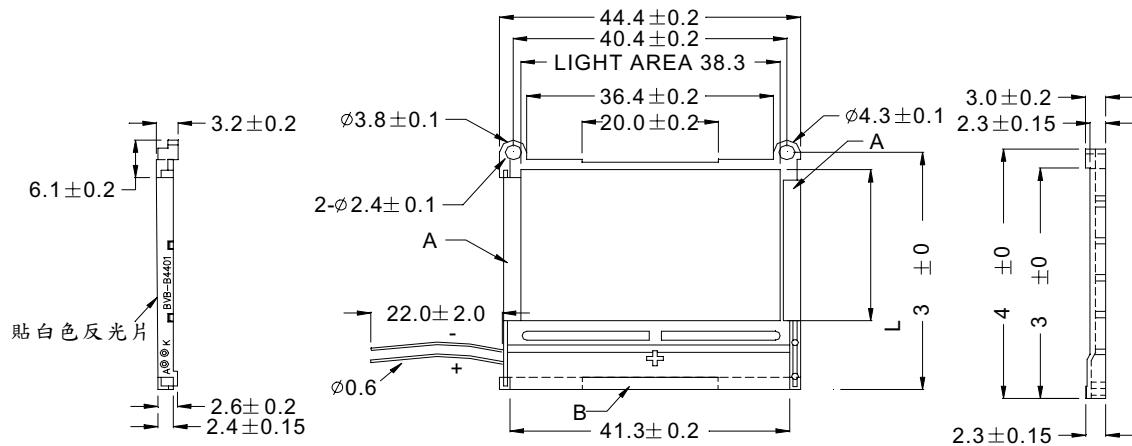

NOTE: A處貼銀光片及雙面膠
B處貼雙面膠

TYPICAL INTERNAL EQUIVALENT CIRCUIT



1x4=4 (DICE NO.)

ABSOLUTE MAXIMUM RATINGS AT Ta = 25 °C

PARAMETER	MAX.	UNIT
Power Dissipation	0.1	W
DC Forward Current	60	mA
Reverse Voltage	8	V
Operating Temperature Range	-20 °C to + 70 °C	
Storage Temperature Range	-30 °C to + 80 °C	

ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta = 25 °C

SYMBOL	PARAMETER	TEST COND.	MIN.	TYP.	MAX.	UNIT
V _F	Forward Voltage	I _F = 40 mA		2.0	2.5	V
I _R	Reverse Current	V _R = 8 V			0.2	mA
λ _p	Peak Emission Wavelength	I _F = 40 mA		568		nm
λ _d	Dominant Wavelength	I _F = 40 mA		573		nm
I _v	Luminous Intensity	I _F = 40 mA	5	8		cd/m ²
	Luminous Uniformity	I _F = 40 mA		30	50	%

*Bright View reserves the rights to alter specifications and remove availability of products at any time without notice.