



BVH-131Y1-C

DESCRIPTION

Dice Material : GaAsP/GaP Yellow


Light Color : Yellow Color

Lens Color : Yellow Diffused

Holder Color : Black Color

PACKAGE CONFIGURATION

Tolerance : ± 0.25 mm

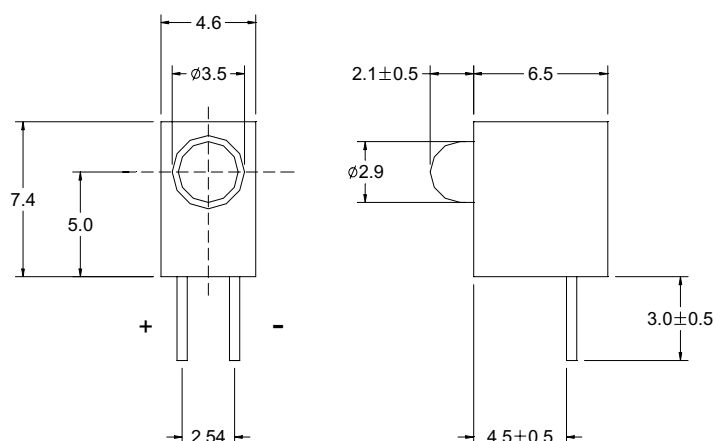

LAMP	1	2	3	4	5	6	7	8	9	10	11	12
COLOR	Y											

ABSOLUTE MAXIMUM RATINGS AT Ta = 25 °C

PARAMETER	MAX	UNIT
Power Dissipation	80	mW
Continuous Forward Current	30	mA
Peak Forward Current (1/10 Duty Cycle , 0.1ms Pulse Width)	90	mA
Reverse Voltage	5	V
Derating Linear From 25 °C	0.4	mW/°C
Operating Temperature Range	-30 °C to + 85 °C	
Storage Temperature Range	-40 °C to + 100 °C	
Lead Solder Temperature 1.6 mm Below Package 260 °C for 5 seconds		

ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta = 25 °C

SYMBOL	PARAMETER	TEST COND.	MIN.	TYP.	MAX.	UNIT
V _F	Forward Voltage	I _F = 20mA		2.1	2.8	V
I _R	Reverse Current	V _R = 5V			100	μA
λ _p	Peak Emission Wavelength	I _F = 20mA		589		nm
λ _d	Dominant Wavelength	I _F = 20mA		590		nm
2θ _{1/2}	Viewing Angle	I _F = 20mA		55		Deg
I _v	Luminous intensity	I _F = 10mA	8	12		mcd

*Bright View reserves the rights to alter specifications and remove availability of products at any time without notice.

*Dominant Wavelength, λ_d is according to CIE Chromaticity Diagram base on color of lamps.

*θ_{1/2} is the off-axis angle where the luminous intensity is one half the on-axis intensity.