





BVL-501Y1D

PACKAGE CONFIGURATION

DESCRIPTION

Dice Material : GaAsP/GaP Yellow
Light Color : Yellow Color
Lens Color : Yellow Diffused
Stand-Off P/N : BVL-501Y1D R

RADIATION PATTERN

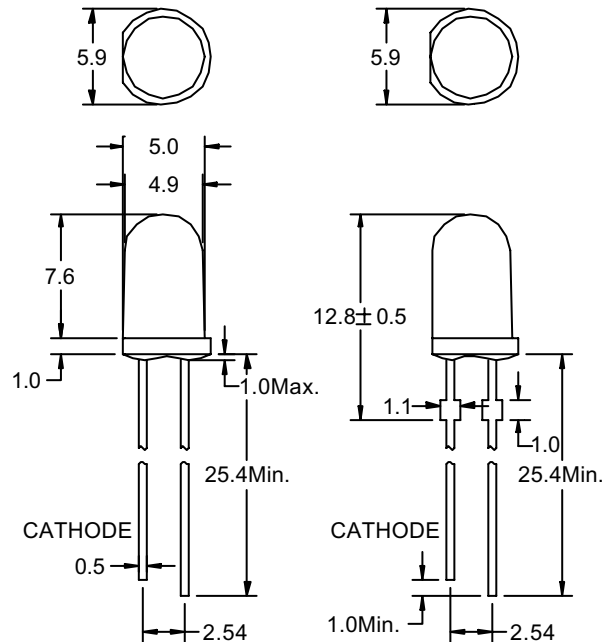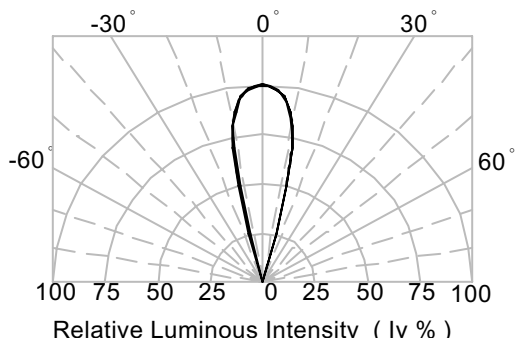

Tolerance $\pm 0.25 \text{ mm}$

ABSOLUTE MAXIMUM RATINGS AT $T_a = 25^\circ\text{C}$

PARAMETER	MAX.	UNIT
Power Dissipation	80	mW
Continuous Forward Current	30	mA
Peak Forward Current (1/10 Duty Cycle , 0.1ms Pulse Width)	90	mA
Reverse Voltage	5	V
Derating Linear From 25 °C	0.4	mA/°C
Operating Temperature Range	−30 °C to + 85 °C	
Storage Temperature Range	−40 °C to + 100 °C	
Lead Solder Temperature 1.6 mm Below Package 260 °C for 5 seconds		

ELECTRICAL / OPTICAL CHARACTERISTICS AT $T_a = 25^\circ\text{C}$

SYMBOL	PARAMETER	TEST COND.	MIN.	TYP.	MAX.	UNIT
V _F	Forward Voltage	I _F = 20 mA		2.2	2.8	V
I _R	Reverse Current	V _R = 5V			100	μA
λ_p	Peak Emission Wavelength	I _F = 20 mA		589		nm
λ_d	Dominant Wavelength	I _F = 20 mA		590		nm
$2\theta_{1/2}$	Viewing Angle	I _F = 20 mA		25		Deg
I _v	Luminous Intensity	I _F = 10 mA	21	40		mcd

*Bright View reserves the rights to alter specifications and remove availability of products at any time without notice.

*Dominant Wavelength, λ_d is according to CIE Chromaticity Diagram base on color of lamps.

* $\theta_{1/2}$ is the off-axis angle where the luminous intensity is one half the on-axis intensity.