




BT 21604


2 Lines x 16 Characters

Data Modul Inc. - 120 Commerce Drive - Hauppauge New York 11788
Tel. 631-951-0800 - Fax 631-9512121 - www.datamodul.com

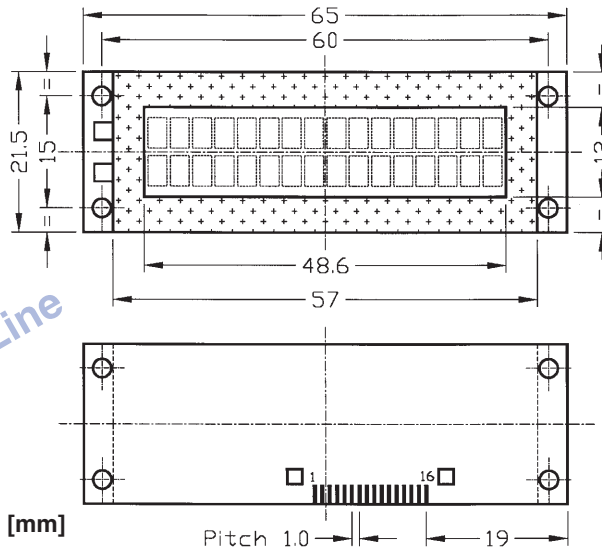

Dot Size

Tolerances : +/- 0.5mm



Character
LCD Modules

MECHANICAL DATA

Parameter	Width x Height x Depth	Unit
Outline Dimensions	65 x 21.5 x 8 (with LED: 8)*	mm
Effective viewing area	48.8 x 12	mm
Dot Size	0.46 x 0.43	mm
Dot Pitch	0.52 x 0.52	mm
Character Matrix	5 x 7	dots
Character Size	2.54 x 4.07	mm
Character Pitch	3.00 x 5.07	mm
Weight	Approximate 13 (with LED: 14)	g

* Types with integrated Connector: 9 mm Depth

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage (Logic)	$V_{DD} (V_{DD}-V_{SS})$	0	6.5	V
Supply Voltage (LCD Driver)	$V_{EE} (V_{DD}-V_0)$	0	13.5	V
Input Voltage	V_I	V_{SS}	V_{DD}	V
Operating Temperature	T_{OP}	See Page 11		°C
Storage Temperature	T_{ST}	See Page 11		°C

ELECTRICAL CHARACTERISTICS

Condition: $T_a = 25^\circ\text{C}$, $V_{DD} = 5.0 \pm 0.25 \text{ V}$

Parameter	Symbol	Min.	Typ	Max.	Unit
Input Voltage HIGH	V_{INH}	2.2	---	---	V
Input Voltage LOW	V_{INL}	---	---	0.6	V
Output Voltage HIGH	V_{OH}	2.4	---	---	V
Output Voltage LOW	V_{OL}	---	---	0.4	V
Supply Current (Logic)	I_{DD}	---	1.0	---	mA
Supply Current (LCD Driver)	I_O	---	0.5	---	mA
Duty Ratio	---	---	1 / 16	---	---

LED BACKLIGHT (STANDARD COLOR GREEN)

Parameter	Symbol	Min.	Typ	Max.	Unit
Supply Voltage	V_F	3.8	4.1	4.4	V
Supply Current	I_F [at 25°C]	---	30	50	mA
Lamp Style*	---	---	01	---	---
LED Segments	---	---	2	---	pcs

* or Lamp Style 04 on request

PIN TABLE

Pin	Symbol	Signal Description
1	V_{SS}	GND (0 V)
2	V_{DD}	Power Supply (5 V)
3	V_0	Supply Voltage (LCD Driver)
4	RS	Register Select - LOW = Instruction, High = Data
5	R / W	Read / Write LOW = MPU to LCM, High = LCM to MPU
6	E	Enable R / W = LOW: Data are taking over at falling edge of E R / W = HIGH: Data can be read at E = 1
7 to 14	DB ₀ to DB ₇	Data Bus - Software selectable 4 or 8 Bit Mode
15	+V _{LED}	Anode of LED Unit
16	-V _{LED}	Cathode of LED Unit

ADDITIONAL INFORMATION

- Display Connector Type (Option):
DIL 1 x 16 pin Connector - BT 21201 / SMD 1 x 16 pin Connector - BT 21000
1 x 16 pin Film Cable 70 mm - BT 21300
- Controller Type - SPLC 780 (1) or compatible

BLOCK DIAGRAM

