


BT 21608


2 Lines x 16 Characters

Data Modul Inc. - 120 Commerce Drive - Hauppauge New York 11788
Tel. 631-951-0800 - Fax 631-9512121 - www.datamodul.com

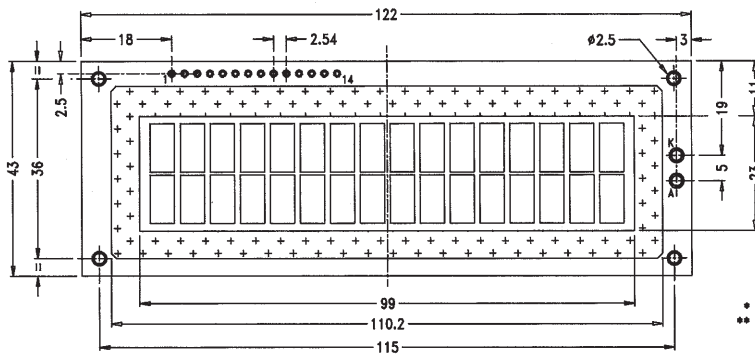

* LED BACKLIGHT VERSION = 9.5
** LED BACKLIGHT VERSION = 14

BT 21608R: A = 0.9
B = 38.2
BT 21608V: A = 3.5
B = 34.5

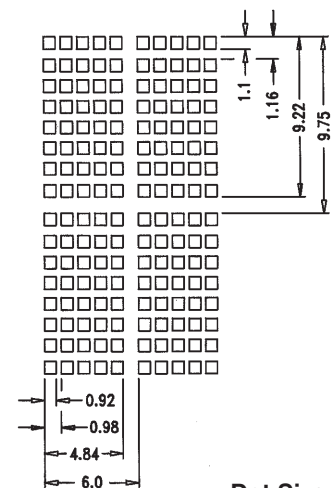

Dot Size

Dimensions [mm]

MECHANICAL DATA

Parameter	Width x Height x Depth	Unit
Outline Dimensions	122 x 43 x 11 (with LED: 14)	mm
Effective viewing area	99 x 23	mm
Dot Size	0.92 x 1.10	mm
Dot Pitch	0.98 x 1.16	mm
Character Matrix	5 x 7	dots
Character Size	4.84 x 8.06	mm
Character Pitch	6.0 x 9.75	mm
Weight	Approximate 55 (with LED: 60)	g

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage (Logic)	$V_{DD} (V_{DD}-V_{SS})$	0	7.0	V
Supply Voltage (LCD Driver)	$V_{EE} (V_{DD}-V_0)$	0	13.5	V
Input Voltage	V_I	V_{SS}	V_{DD}	V
Operating Temperature	T_{OP}	See Page 11		°C
Storage Temperature	T_{ST}	See Page 11		°C

ELECTRICAL CHARACTERISTICS

Condition: $T_a = 25^\circ\text{C}$, $V_{DD} = 5.0 \pm 0.25 \text{ V}$

Parameter	Symbol	Min.	Typ	Max.	Unit
Input Voltage HIGH	V_{INH}	2.2	---	---	V
Input Voltage LOW	V_{INL}	---	---	0.6	V
Output Voltage HIGH	V_{OH}	2.4	---	---	V
Output Voltage LOW	V_{OL}	---	---	0.4	V
Supply Current (Logic)	I_{DD}	---	1.0	---	mA
Supply Current (LCD Driver)	I_0	---	0.5	---	mA
Duty Ratio	---	---	1 / 16	---	---

LED BACKLIGHT (STANDARD COLOR GREEN)

Parameter	Symbol	Min.	Typ	Max.	Unit
Supply Voltage	V_F	3.8	4.0	4.2	V
Supply Current	I_F [at 25°C]	---	240	360	mA
Lamp Style	---	---	04	---	---
LED Segments	---	---	24	---	P _{CS}

PIN TABLE

Pin	Symbol	Signal Description
1	V_{SS}	GND (0 V)
2	V_{DD}	Power Supply (5 V)
3	V_0	Supply Voltage (LCD Driver)
4	RS	Register Select - LOW = Instruction, High = Data
5	R / $\bar{W}$	Read / Write LOW = MPU to LCM, HIGH = LCM to MPU
6	E	Enable R / $\bar{W}$ = LOW: Data are taking over at falling edge of E R / $\bar{W}$ = HIGH: Data can be read at E = 1
7 to 14	DB ₀ to DB ₇	Data Bus - Software selectable 4 or 8 Bit Mode
A	+V _{LED}	Anode of LED Unit
K	-V _{LED}	Cathode of LED Unit

ADDITIONAL INFORMATION

- ◆ Display Connector Type - without LED: 1 x 14
- ◆ Display Connector Type - with LED: See Drawing
- ◆ Controller Type - SPLC 780 (1) or compatible

BLOCK DIAGRAM

