


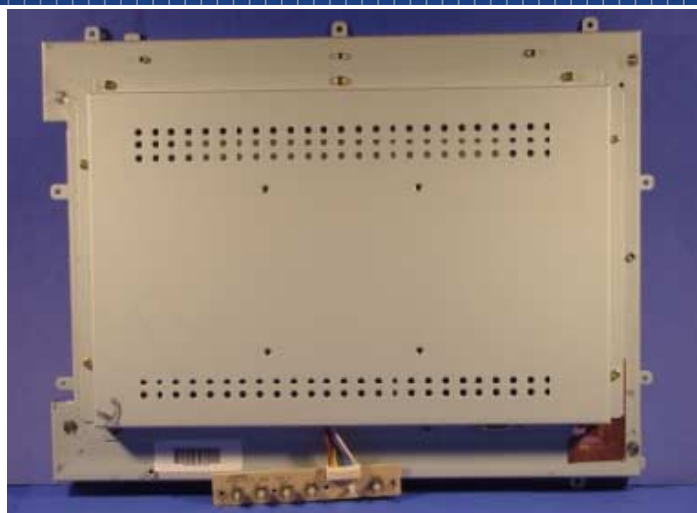

BT KIT 1550

Display Type	15.1" Active Matrix (TFT)
Panel	LG Phillips LM151X2-C2TH
Brightness BT KIT1550	370cd/m ² (typ.)
Resolution	1024X768
Display active area (W*H)	307.2 x 230.4mm
Display bezel area (W*H)	311,2 x 234,4mm
DOT Pitch	0.30mm
View Angle	40°/40°(Up/Down) 60°/60°(Left/Right,typ.)
Contrast Ratio	200:1 (typ.)
Display Color	16.8M (full colour)
Horizontal Frequency (KHz)	25-60
Vertical Frequency (Hz)	56-85
Interface	Analog RGB H-POS, V-POS, DIVIDER FINE TUNE, BACKLIGHT BRIGHTNESS, CONTRAST COLOR TEMPERATURE OSD H/V POS, LOAD VALUE SOURCE SELECTION
OSD Control	
Export Carton Dimension (W X H X D)	445X440X213 (each) 2pcs/export carton
Net Weight/Gross Weight	5.5kg/7kg
Power Saving	EPA, VESA DPMS
Plug & Play	VESA DDC 1/2B
Power Consumption	35W (Max)
Power Input	AC110-240V / 47-63Hz
Output	DC10-17V / 3.5A (Max)
Optional	Touch screen USB port