



BVG - 055KG3 / 055KG4


DESCRIPTION

Dice Materia : InGaAlP/GaAs Yellow Green


Light Color : Yellow Green

Lens Color : Water Transparent

PACKAGE CONFIGURATION

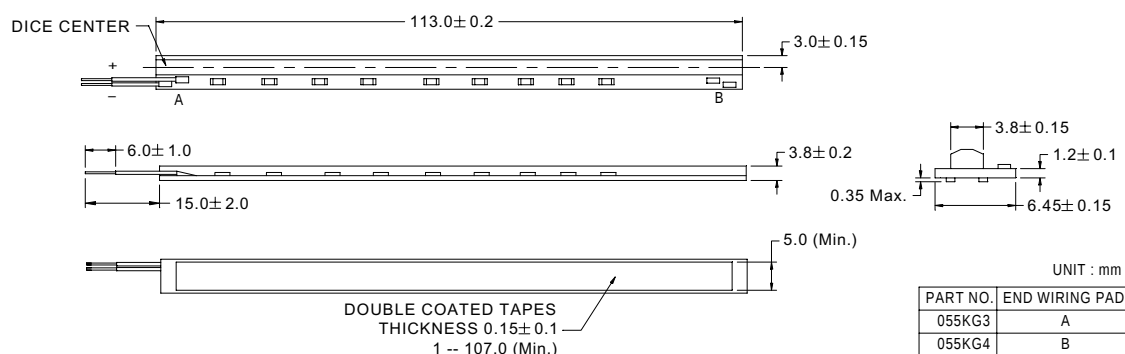

TYPICAL INTERNAL EQUIVALENT CIRCUIT

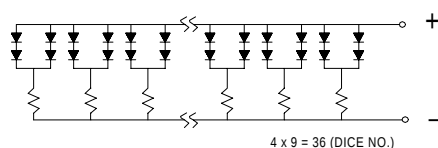

ABSOLUTE MAXIMUM RATINGS AT Ta = 25°C

PARAMETER	MAX.	UNIT
Forward Voltage	5.3	V
Reverse Voltage	7.0	V
Power Dissipation	2.4	W
Operating Temperature Range	-10°C TO +60°C	
Storage Temperature Range	-25°C TO +80°C	

ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta = 25°C

SYMBOL	PARAMETER	TEST COND.	MIN.	TYP.	MAX.	UNIT
I _{DD}	Forward Current	V _{DD} = 5 V		360	450	mA
I _R	Reverse Current	V _R = 7 V			0.5	mA
L _{vp}	Peak Luminous	V _{DD} = 5 V	7000			Lux
△EH	Uniformity	V _{DD} = 5 V			20	%
△L	Effective Illuminated Width	V _{DD} = 5 V	3.0	4.6		mm
λ _p	Peak Emission Wavelength	I _F = 20 mA		574		nm
△λ	Spectral Line Half Width	I _F = 20 mA		30		nm
L	Effective Illuminated Length	V _{DD} = 5 V		103		mm

* Bright View reserves the rights to alter specifications and remove availability of products at any time without notice.

* Dominant Wavelength, λ_d is according to CIE Chromaticity Diagram base on color of lamps.

* θ_{1/2} is the off-axis angle where the luminous intensity is one half the on-axis intensity.