



SINGLE COLOR LED


3mm Round Shape



3368S Series

STANDARD COLOR

Outline Dimensions

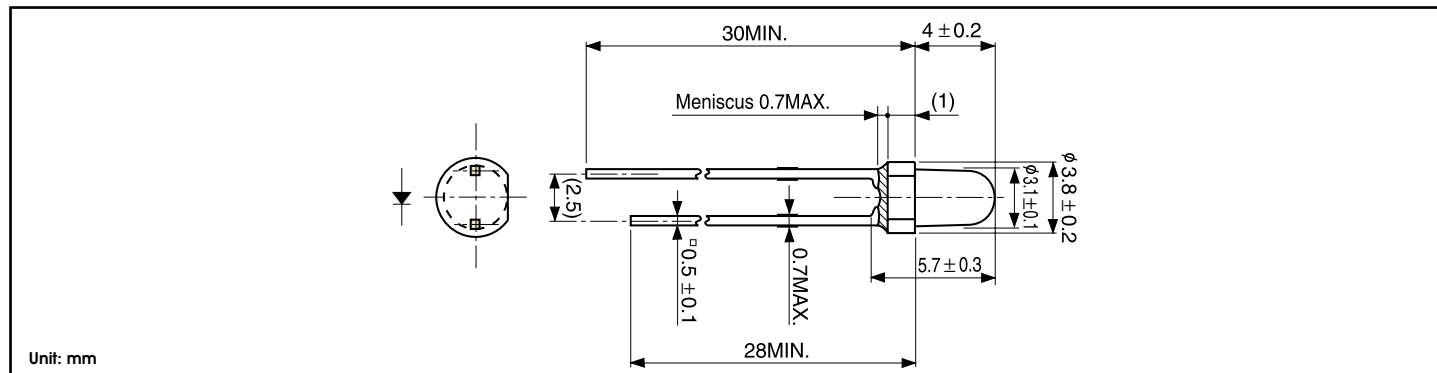

Absolute Maximum Ratings

(Ta=25°C)

Item	Symbol	Red			Orange	Yellow	Yellow Green	Green	Pure Green	Units
		EBR/BR	MPR	EMVR/MVR	EMAA/MAA	EMAY/MAY	EMPY/MPY	EMPG/MPG	EMBG/MBG	
Power Dissipation	Pd	100	75	75	70	85	85	70	70	mW
Forward Current	I _F	50	30	30	25	30	30	25	25	mA
Peak Forward Current	I _{FM}	300	75	75	60	75	75	60	60	mA
Reverse Voltage	V _R	4	4	4	4	4	4	4	4	V
Operating Temperature	T _{opr}	-30 to +85								°C
Storage Temperature	T _{stg}	-30 to +100								°C
Derating (DC)*	I _F	0.67	0.40		0.33	0.40		0.33		mA/°C


* Ta=25°C, I_{FM} applies for the pulse width 1msec. and duty cycle 1/20
The current derating for operation applies when the temperature is above 25°C

Electro-Optical Characteristics

*The viewing angle is an average and will vary by color (Ta=25°C)

Part No.	Material	Emitted Color	Lens Color	Luminous Intensity I _V			Wavelength				Forward Voltage V _F			Reverse Current I _R		Viewing Angle (2 1/2)		
				MIN.	TYP.	I _F	Peak P TYP.	Spectral Line Dominant d		TYP.	I _F	TYP.	MAX.	I _F	MAX.		V _R	
								TYP.	TYP.									
EBR/BR3368S	GaAlAs	Red	Clear Pastel Red	80/40	140/80	20	660	647	30	20	1.7	2.0	20	100	4	15°		
MPR3368S	GaP			3	6	10	700	635	100	10	2.1	2.8	10	20	4			
EMVR/MVR3368S	GaAsP			40/20	60/40	20	630	624	30	20	2.0	2.8	20	20	4			
EMAA/MAA3368S	GaAsP	Orange	Clear Pastel Orange	40/20	60/40	20	605	606	30	20	2.2	2.8	20	20	4		20°	
EMAY/MAY3368S	GaAsP	Yellow	Clear Pastel Yellow	40/20	60/40	20	580	590	30	20	2.2	2.8	20	20	4			
EMPY/MPY3368S	GaP	Yellow Green		60/30	90/60	20	570	572	30	20	2.1	2.8	20	20	4			
EMPG/MPG3368S	GaP	Green	Clear Pastel Green	40/20	60/40	20	560	567	30	20	2.1	2.8	20	20	4			
EMBG/MBG3368S	GaP	Pure Green		20/10	30/20	20	555	558	30	20	2.1	2.8	20	20	4			
Units				mcd		mA	nm			mA		V		mA		μA	V	Deg.

Spatial Distribution (x)

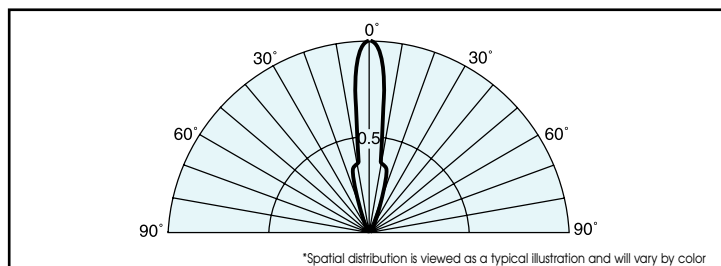

Operation Current Derating Chart

