


### Features

- Ultra-Small Surface Mount Package
- Fast Switching Speed
- For General Purpose Switching Applications
- High Conductance

### Mechanical Data

- Case: SOT-523, Molded Plastic
- Case Material UL Flammability Rating: 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: See Diagram
- Marking: T3 (See Page 2)
- Weight: 0.002 grams (approx.)

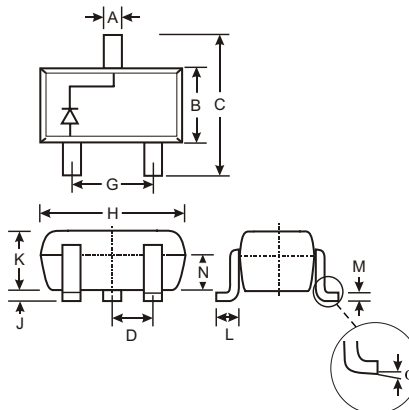

| SOT-523              |      |      |      |
|----------------------|------|------|------|
| Dim                  | Min  | Max  | Typ  |
| A                    | 0.15 | 0.30 | 0.22 |
| B                    | 0.75 | 0.85 | 0.80 |
| C                    | 1.45 | 1.75 | 1.60 |
| D                    | —    | —    | 0.50 |
| G                    | 0.90 | 1.10 | 1.00 |
| H                    | 1.50 | 1.70 | 1.60 |
| J                    | 0.00 | 0.10 | 0.05 |
| K                    | 0.60 | 0.80 | 0.75 |
| L                    | 0.10 | 0.30 | 0.22 |
| M                    | 0.10 | 0.20 | 0.12 |
| N                    | 0.45 | 0.65 | 0.50 |
| α                    | 0°   | 8°   | —    |
| All Dimensions in mm |      |      |      |

### Maximum Ratings @ T<sub>A</sub> = 25°C unless otherwise specified

| Characteristic                                                      | Symbol                             | Value       | Unit |
|---------------------------------------------------------------------|------------------------------------|-------------|------|
| Repetitive Peak Reverse Voltage                                     | V <sub>RRM</sub>                   | 250         | V    |
| Working Peak Reverse Voltage<br>DC Blocking Voltage                 | V <sub>RWM</sub><br>V <sub>R</sub> | 200         | V    |
| RMS Reverse Voltage                                                 | V <sub>R(RMS)</sub>                | 141         | V    |
| Forward Continuous Current (Note 1)                                 | I <sub>FM</sub>                    | 400         | mA   |
| Average Rectified Output Current (Note 1)                           | I <sub>O</sub>                     | 200         | mA   |
| Non-Repetitive Peak Forward Surge Current @ t = 1.0μs<br>@ t = 1.0s | I <sub>FSM</sub>                   | 2.5<br>0.5  | A    |
| Repetitive Peak Forward Surge Current                               | I <sub>FRM</sub>                   | 625         | mA   |
| Power Dissipation (Note 1)                                          | P <sub>d</sub>                     | 150         | mW   |
| Thermal Resistance Junction to Ambient (Note 1)                     | R <sub>θJA</sub>                   | 833         | °C/W |
| Operating and Storage Temperature Range                             | T <sub>J</sub> , T <sub>STG</sub>  | -65 to +150 | °C   |

### Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified

| Characteristic                                       | Symbol             | Min | Max         | Unit     | Test Condition                                                                                            |
|------------------------------------------------------|--------------------|-----|-------------|----------|-----------------------------------------------------------------------------------------------------------|
| Reverse Breakdown Voltage (Note 2)                   | V <sub>(BR)R</sub> | 250 | —           | V        | I <sub>R</sub> = 100μA                                                                                    |
| Forward Voltage (Note 2)                             | V <sub>F</sub>     | —   | 1.0<br>1.25 | V        | I <sub>F</sub> = 100mA<br>I <sub>F</sub> = 200mA                                                          |
| Reverse Current @ Rated DC Blocking Voltage (Note 2) | I <sub>R</sub>     | —   | 100<br>15   | nA<br>μA | T <sub>J</sub> = 25°C<br>T <sub>J</sub> = 100°C                                                           |
| Total Capacitance                                    | C <sub>T</sub>     | —   | 5.0         | pF       | V <sub>R</sub> = 0, f = 1.0MHz                                                                            |
| Reverse Recovery Time                                | t <sub>rr</sub>    | —   | 50          | ns       | I <sub>F</sub> = I <sub>R</sub> = 30mA,<br>I <sub>rr</sub> = 0.1 x I <sub>R</sub> , R <sub>L</sub> = 100Ω |

- Notes:
1. Device mounted on FR-4 PC board with recommended pad layout, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
  2. Short duration test pulse used to minimize self-heating effect.

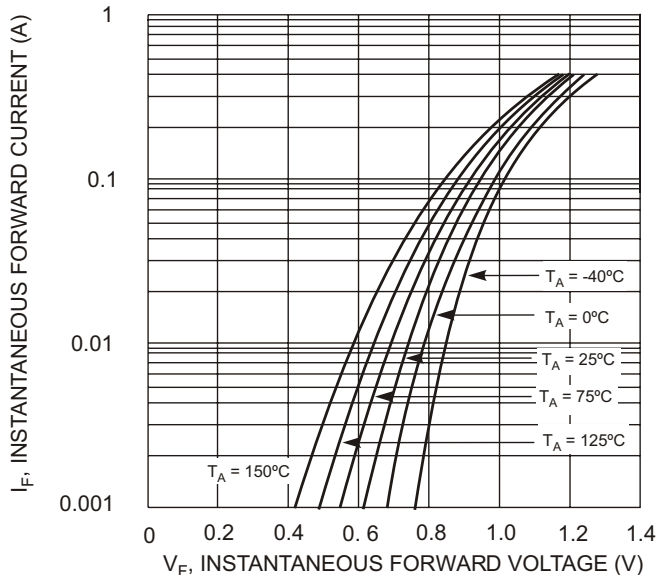


Fig. 1 Typical Forward Characteristics

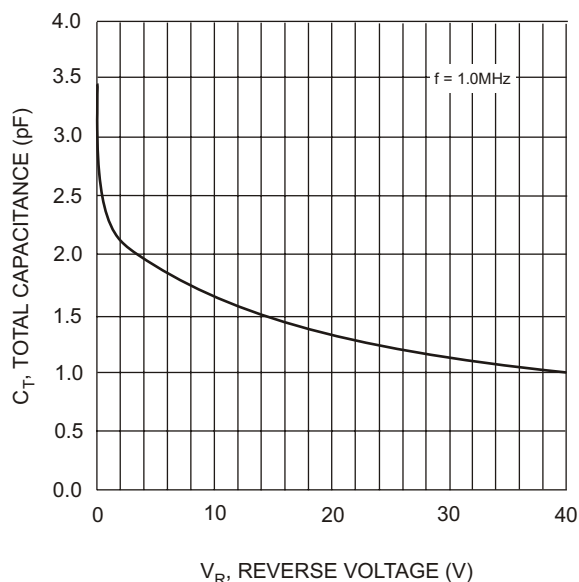


Fig. 3 Typical Capacitance vs. Reverse Voltage

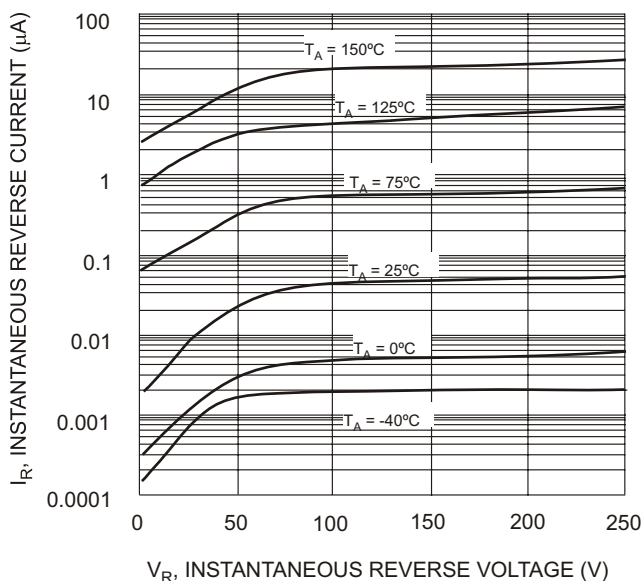


Fig. 2 Typical Reverse Characteristics

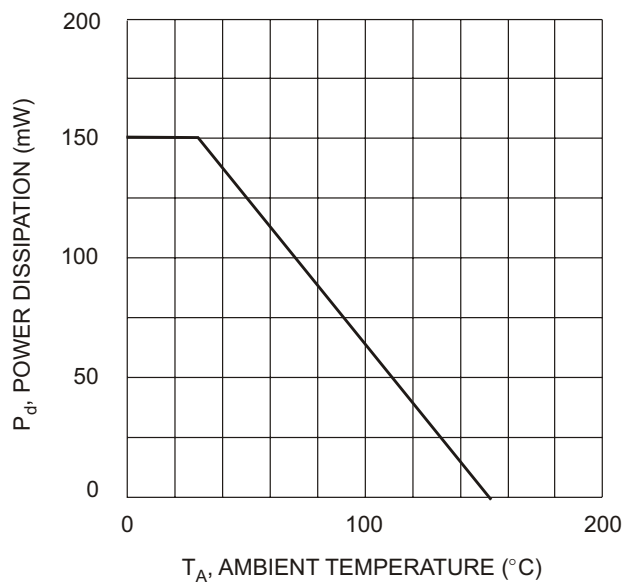



Fig. 4 Power Derating Curve, Total Package

## Ordering Information (Note 3)

| Device   | Packaging | Shipping         |
|----------|-----------|------------------|
| BAS21T-7 | SOT-523   | 3000/Tape & Reel |

Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

## Marking Information



T3 = Product Type Marking Code  
 YM = Date Code Marking  
 Y = Year (ex: N = 2002)  
 M = Month (ex: 9 = September)

Date Code Key

| Year | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 |
|------|------|------|------|------|------|------|------|------|------|
| Code | M    | N    | P    | R    | S    | T    | U    | V    | W    |

| Month | Jan | Feb | March | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code  | 1   | 2   | 3     | 4   | 5   | 6   | 7   | 8   | 9   | O   | N   | D   |