

[illegible]

BSM 50 GD 170 DL

Höchstzulässige Werte / Maximum rated values

Elektrische Eigenschaften / Electrical properties

Kollektor-Emitter-Sperrspannung	collector-emitter voltage	$T_C = 80^{\circ}\text{C}$	V_{CES}	1700 V
Kollektor-Dauergleichstrom	DC-collector current	$T_C = 25^{\circ}\text{C}$	$I_{C,nom.}$	50 A
			I_C	100 A
Periodischer Kollektor Spitzenstrom	repetitive peak collector current	$t_p = 1\text{ ms}$, $T_C = 80^{\circ}\text{C}$	I_{CRM}	100 A
Gesamt-Verlustleistung	total power dissipation	$T_C = 25^{\circ}\text{C}$, Transistor	P_{tot}	480 W
Gate-Emitter-Spitzenspannung	gate-emitter peak voltage		V_{GES}	$\pm 20\text{ V}$
Dauergleichstrom	DC forward current		I_F	50 A
Periodischer Spitzenstrom	repetitive peak forw. current	$t_p = 1\text{ ms}$	I_{FRM}	100 A
Grenzlastintegral der Diode	I^2t - value, Diode	$V_R = 0\text{V}$, $t_p = 10\text{ms}$, $T_{vj} = 125^{\circ}\text{C}$	I^2t	1100 A ² s
Isolations-Prüfspannung	insulation test voltage	RMS, $f = 50\text{ Hz}$, $t = 1\text{ min.}$	V_{ISOL}	3,4 kV

Charakteristische Werte / Characteristic values: Transistor

				min.	typ.	max.
Kollektor-Emitter Sättigungsspannung	collector-emitter saturation voltage	$I_C = 50\text{A}$, $V_{GE} = 15\text{V}$, $T_{vj} = 25^{\circ}\text{C}$	$V_{CE\text{ sat}}$	-	2,7	3,3 V
		$I_C = 50\text{A}$, $V_{GE} = 15\text{V}$, $T_{vj} = 125^{\circ}\text{C}$		-	3,2	- V
Gate-Schwellenspannung	gate threshold voltage	$I_C = 2,5\text{mA}$, $V_{CE} = V_{GE}$, $T_{vj} = 25^{\circ}\text{C}$	$V_{GE(th)}$	4,5	5,5	6,5 V
Eingangskapazität	input capacitance	$f = 1\text{MHz}$, $T_{vj} = 25^{\circ}\text{C}$, $V_{CE} = 25\text{V}$, $V_{GE} = 0\text{V}$	C_{ies}	-	3,5	- nF
Kollektor-Emitter Reststrom	collector-emitter cut-off current	$V_{CE} = 1700\text{V}$, $V_{GE} = 0\text{V}$, $T_{vj} = 25^{\circ}\text{C}$	I_{CES}	-	0,02	0,1 mA
		$V_{CE} = 1700\text{V}$, $V_{GE} = 0\text{V}$, $T_{vj} = 125^{\circ}\text{C}$		-	1,5	- mA
Gate-Emitter Reststrom	gate-emitter leakage current	$V_{CE} = 0\text{V}$, $V_{GE} = 20\text{V}$, $T_{vj} = 25^{\circ}\text{C}$	I_{GES}	-	-	100 nA
Einschaltverzögerungszeit (induktive Last)	turn-on delay time (inductive load)	$I_C = 50\text{A}$, $V_{CE} = 900\text{V}$	$t_{d,on}$			
		$V_{GE} = \pm 15\text{V}$, $R_G = 30\Omega$, $T_{vj} = 25^{\circ}\text{C}$		-	0,1	- μs
		$V_{GE} = \pm 15\text{V}$, $R_G = 30\Omega$, $T_{vj} = 125^{\circ}\text{C}$		-	0,1	- μs
Anstiegszeit (induktive Last)	rise time (inductive load)	$I_C = 50\text{A}$, $V_{CE} = 900\text{V}$	t_r			
		$V_{GE} = \pm 15\text{V}$, $R_G = 30\Omega$, $T_{vj} = 25^{\circ}\text{C}$		-	0,1	- μs
		$V_{GE} = \pm 15\text{V}$, $R_G = 30\Omega$, $T_{vj} = 125^{\circ}\text{C}$		-	0,1	- μs
Abschaltverzögerungszeit (ind. Last)	turn off delay time (inductive load)	$I_C = 50\text{A}$, $V_{CE} = 900\text{V}$	$t_{d,off}$			
		$V_{GE} = \pm 15\text{V}$, $R_G = 30\Omega$, $T_{vj} = 25^{\circ}\text{C}$		-	0,8	- μs
		$V_{GE} = \pm 15\text{V}$, $R_G = 30\Omega$, $T_{vj} = 125^{\circ}\text{C}$		-	0,9	- μs
Fallzeit (induktive Last)	fall time (inductive load)	$I_C = 50\text{A}$, $V_{CE} = 900\text{V}$	t_f			
		$V_{GE} = \pm 15\text{V}$, $R_G = 30\Omega$, $T_{vj} = 25^{\circ}\text{C}$		-	0,03	- μs
		$V_{GE} = \pm 15\text{V}$, $R_G = 30\Omega$, $T_{vj} = 125^{\circ}\text{C}$		-	0,03	- μs
Einschaltverlustenergie pro Puls	turn-on energy loss per pulse	$I_C = 50\text{A}$, $V_{CE} = 900\text{V}$, $V_{GE} = 15\text{V}$	E_{on}			
		$R_G = 30\Omega$, $T_{vj} = 125^{\circ}\text{C}$, $L_S = 60\text{nH}$		-	26	- mWs
Abschaltverlustenergie pro Puls	turn-off energy loss per pulse	$I_C = 50\text{A}$, $V_{CE} = 900\text{V}$, $V_{GE} = 15\text{V}$	E_{off}			
		$R_G = 30\Omega$, $T_{vj} = 125^{\circ}\text{C}$, $L_S = 60\text{nH}$		-	14,5	- mWs
Kurzschlußverhalten	SC Data	$t_p \leq 10\mu\text{sec}$, $V_{GE} \leq 15\text{V}$, $R_G = 30\Omega$	I_{SC}			
		$T_{vj} \leq 125^{\circ}\text{C}$, $V_{CC} = 1000\text{V}$		-	200	- A
		$V_{CEmax} = V_{CES} - L_{sCE} \times di/dt$				
Modulinduktivität	stray inductance module		L_{sCE}	-	25	- nH

Charakteristische Werte / Characteristic values: Diode

Durchlaßspannung	forward voltage	$I_F = 50\text{A}$, $V_{GE} = 0\text{V}$, $T_{vj} = 25^{\circ}\text{C}$	V_F	-	2,2	2,6 V
		$I_F = 50\text{A}$, $V_{GE} = 0\text{V}$, $T_{vj} = 125^{\circ}\text{C}$		-	2	- V
Rückstromspitze	peak reverse recovery current	$I_F = 50\text{A}$, - $di_F/dt = 750\text{A}/\mu\text{sec}$	I_{RM}			
		$V_R = 900\text{V}$, $V_{GE} = -10\text{V}$, $T_{vj} = 25^{\circ}\text{C}$		-	36	- A
		$V_R = 900\text{V}$, $V_{GE} = -10\text{V}$, $T_{vj} = 125^{\circ}\text{C}$		-	56	- A
Sperrverzögerungsladung	recovered charge	$I_F = 50\text{A}$, - $di_F/dt = 750\text{A}/\mu\text{sec}$	Q_r			
		$V_R = 900\text{V}$, $V_{GE} = -10\text{V}$, $T_{vj} = 25^{\circ}\text{C}$		-	6	- μAs
		$V_R = 900\text{V}$, $V_{GE} = -10\text{V}$, $T_{vj} = 125^{\circ}\text{C}$		-	12	- μAs
Abschaltenergie pro Puls	reverse recovery energy	$I_F = 50\text{A}$, - $di_F/dt = 750\text{A}/\mu\text{sec}$	E_{rec}			
		$V_R = 900\text{V}$, $V_{GE} = -10\text{V}$, $T_{vj} = 25^{\circ}\text{C}$		-	2	- mWs
		$V_R = 900\text{V}$, $V_{GE} = -10\text{V}$, $T_{vj} = 125^{\circ}\text{C}$		-	4	- mWs

Thermische Eigenschaften / Thermal properties

Innerer Wärmewiderstand	thermal resistance, junction to case	Transistor / transistor, DC	R_{thJC}	-	-	0,26 K/W
		Diode / diode, DC		-	-	0,56 K/W
Übergangs-Wärmewiderstand	thermal resistance, case to heatsink	pro Module / per Module	R_{thCK}			
		$d_{Paste} \leq 50\mu\text{m}$ / $d_{grease} \leq 50\mu\text{m}$		-	-	0,011 K/W
Höchstzul. Sperrschichttemperatur	max. junction temperature		T_{vj}	-	-	150 $^{\circ}\text{C}$
Betriebstemperatur	operating temperature		T_{op}	-40	-	125 $^{\circ}\text{C}$
Lagertemperatur	storage temperature		T_{stg}	-40	-	125 $^{\circ}\text{C}$

Mechanische Eigenschaften / Mechanical properties

Innere Isolation	internal insulation					Al_2O_3
Kriechstrecke	creepage distance					16 mm
Luftstrecke	clearance					11 mm
CTI	comperative tracking index					225
Anzugsdrehmoment f. mech. Befestigung	mounting torque		max.			5 Nm
Gewicht	weight		G			300 g

Mit dieser technischen Information werden Halbleiterbauelemente spezifiziert, jedoch keine Eigenschaften zugesichert. Sie gilt in Verbindung mit den zugehörigen Technischen Erläuterungen.
This technical information specifies semiconductor devices but promises no characteristics. It is valid in combination with the belonging technical notes.

BSM 50 GD 170 DL

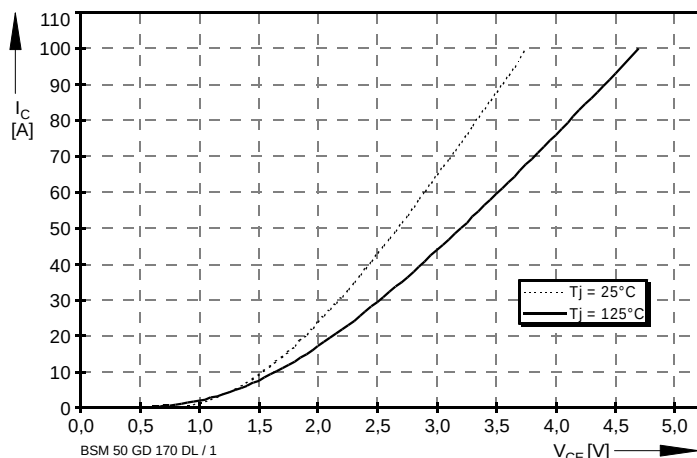


Bild / Fig. 1
Ausgangskennlinie (typisch) /
Output characteristic (typical)
 $I_C = f(V_{CE})$
 $V_{GE} = 15V$

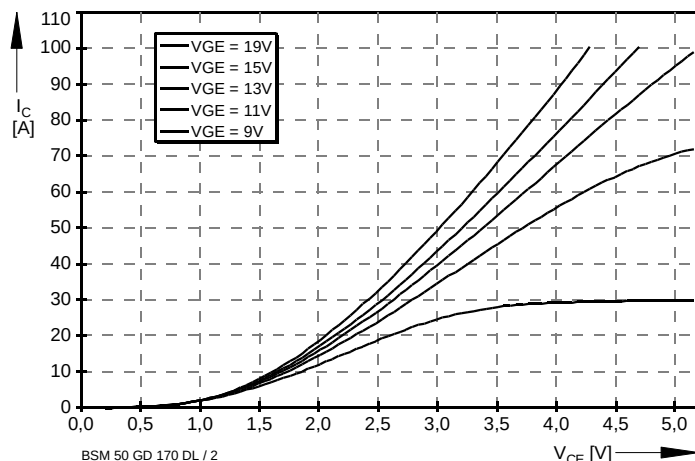


Bild / Fig. 2
Ausgangskennlinienfeld (typisch) /
Output characteristic (typical)
 $I_C = f(V_{CE})$
 $T_{Jl} = 125^\circ C$

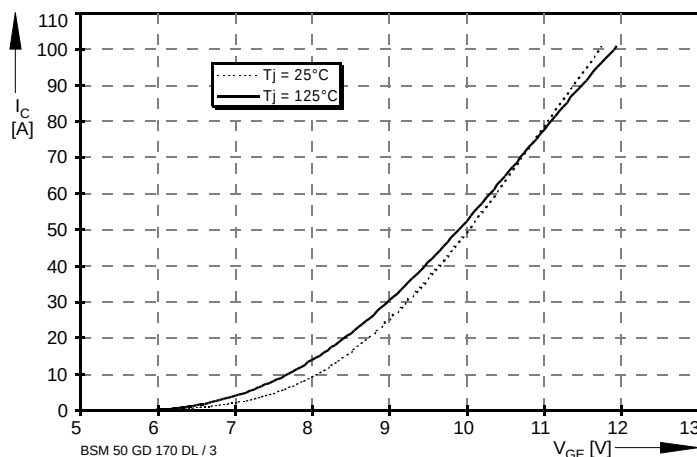


Bild / Fig. 3
Übertragungscharakteristic (typisch) /
Transfer characteristic (typical)
 $I_C = f(V_{GE})$
 $V_{CE} = 20V$

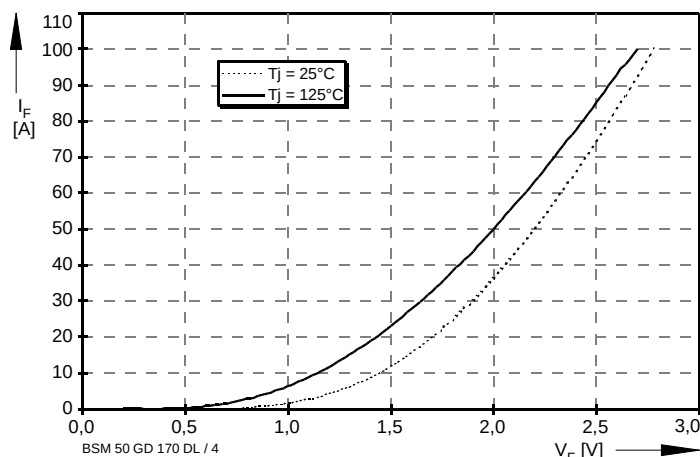


Bild / Fig. 4
Durchlaßkennlinie der Inversdiode (typisch) /
Forward characteristic of inverse diode (typical)
 $I_F = f(V_F)$

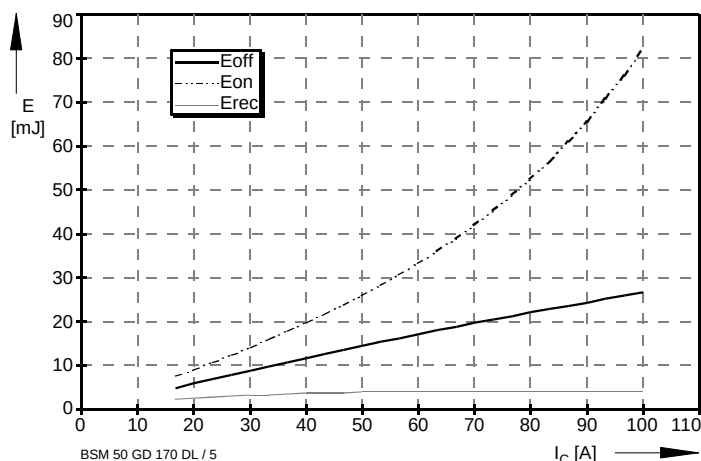


Bild / Fig. 5
Schaltverluste (typisch) /
Switching losses (typical)
 $E_{on} = f(I_C)$, $E_{off} = f(I_C)$, $E_{rec} = f(I_C)$
 $R_{gon} = R_{goff} = 30\Omega$, $V_{CE} = 900V$, $T_J = 125^\circ C$

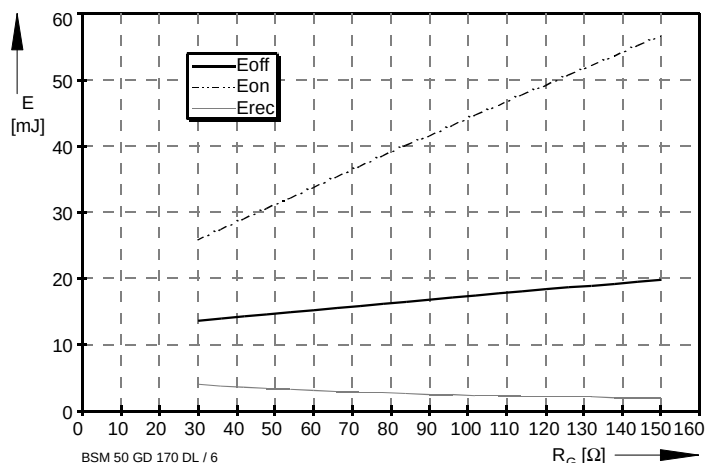


Bild / Fig. 6
Schaltverluste (typisch) /
Switching losses (typical)
 $E_{on} = f(R_G)$, $E_{off} = f(R_G)$, $E_{rec} = f(R_G)$
 $I_C = 50A$, $V_{CE} = 900V$, $T_J = 125^\circ C$

BSM 50 GD 170 DL

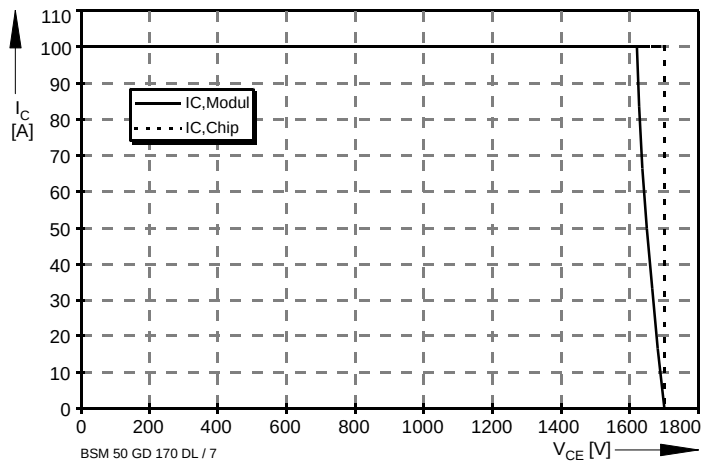


Bild / Fig. 7

Sicherer Arbeitsbereich (RBSOA) /

Reverse bias safe operation area (RBSOA)

$R_g = 30\Omega$, $T_{vj} = 125^\circ\text{C}$

Terms & Conditions of Usage

Attention

The present product data is exclusively subscribed to technically experienced staff. This Data Sheet is describing the specification of the products for which a warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its specifications. Changes to the Data Sheet are reserved.

You and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application. Should you require product information in excess of the data given in the Data Sheet, please contact your local Sales Office via "www.eupec.com / sales & contact".

Warning

Due to technical requirements the products may contain dangerous substances. For information on the types in question please contact your local Sales Office via "www.eupec.com / sales & contact".