



Inductive sensor

Bi25-G47SR-FZ3X2

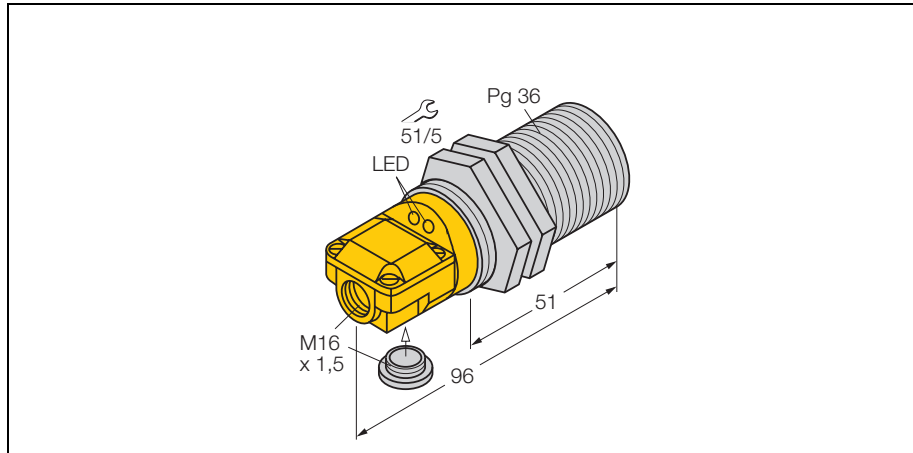

- 2 cable entries (axial, radial)
- threaded barrel, Pg36
- chrome-plated brass
- 2-wire AC, 20...250 VAC;
- 2-wire DC, 20...300 VDC
- connection programmable (n.c./n.o.)
- terminal chamber

Wiring diagram



Function principles

Inductive proximity switches are designed for wear-free non-contact detection of metal objects. For this they use a high-frequency electro-magnetic AC field that interacts with the target. With inductive sensors, this field is generated by an LC resonant circuit with a ferrite core coil.

Type	Bi25-G47SR-FZ3X2
Ident-No.	13427
Rated operating distance S_n	25 mm
Mounting mode	flush
Hysteresis (switching distance)	3... 15 %
Min. repeat accuracy	$\leq 2 \%$
Temperature drift	$\leq \pm 10 \%$
Operating temperature	-25 ...+ 70 °C
Rated operational voltage (AC) U_B	20... 250 VAC
Rated operational voltage (DC) U_B	10... 300 VDC
Rated operational current (AC) I_B	≤ 400 mA
Rated operational current (DC) I_B	≤ 300 mA
Line frequency	50... 60 Hz
Max. OFF-state current	$\leq 1,7$ mA
Max. switching frequency	$\leq 0,02$ kHz
Rated insulation voltage	$\leq 1,5$ kV
Surge Current	≤ 8 A (≤ 10 ms max. 5 Hz)
Output function	2-wire, connection programmable
Max. voltage drop at I_B	≤ 6 V
Min. operational current I_m	≥ 3 mA
Housing style	threaded barrel; PG36
Dimensions	96 mm
Housing material	metal, CuZn, chrome-plated
Active face	plastic, PA12-GF30
Max. fixing torque of coupling nut	90 Nm
Wiring	terminal chamber
Clamping ability	$\leq 2,5$ mm ²
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 x g (11 ms)
Degree of protection	IP67
Supply voltage indication	LED green
Switching status indication	LED red
Included with sensor	blanking plug

Inductive sensor


Bi25-G47SR-FZ3X2

Mounting instructions

	minimum gap
Gap D	2 x B
Gap W	3 x Sn
Gap T	3 x B
Gap S	1,5 x B
Gap G	6 x Sn

Diameter of active face B

Ø 47 mm

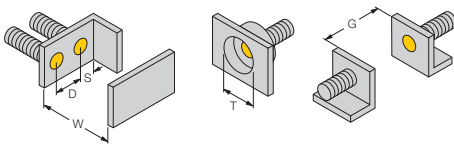

Inductive sensor

Bi25-G47SR-FZ3X2

Accessories

Typ	Ident-No.	Description	Dimension drawing
MW47	69452	mounting bracket; material: zinc-plated steel plate	