



## Capacitive sensor

### BC10-S30-VP4X



- threaded barrel, M30 x 1,5
- plastic, PA12-GF30
- fine adjustment via potentiometer
- 4-wire DC, 10...65 VDC
- SPDT, pnp output
- cable connection

#### Wiring diagram



#### Function principles


Capacitive proximity switches are designed for non-contact and wear-free detection of metal (electrically conductive) and non-metal (electrically non-conductive) objects.

|                                                     |                            |
|-----------------------------------------------------|----------------------------|
| <b>Type</b>                                         | BC10-S30-VP4X              |
| Ident-No.                                           | 2506110                    |
| <b>Rated operating distance Sn</b>                  | 10 mm, flush mounting      |
| Rated operating distance Sn                         | 15 mm, non-flush mounting  |
| Hysteresis (switching distance)                     | 2... 20 %                  |
| Temperature drift                                   | ≤ ± 20 %                   |
| Min. repeat accuracy                                | ≤ 2 %                      |
| Operating temperature                               | -25 ...+ 70 °C             |
| <b>Rated operational voltage (DC) U<sub>B</sub></b> | 10... 65 VDC               |
| Max. ripple                                         | ≤ 10 % U <sub>pp</sub>     |
| Rated operational current (DC) I <sub>e</sub>       | ≤ 200 mA                   |
| No-load current I <sub>0</sub>                      | ≤ 15 mA                    |
| Max. OFF-state current                              | ≤ 0,1 mA                   |
| Max. switching frequency                            | ≤ 0,1 kHz                  |
| Rated insulation voltage                            | ≤ 0,5 kV                   |
| Output function                                     | 4-wire, complementary, PNP |
| Short-circuit protection                            | yes, cyclic                |
| Max. voltage drop at I <sub>e</sub>                 | ≤ 1,8 V                    |
| Wire breakage / reverse polarity protection         | yes / complete             |
| <b>Housing style</b>                                | threaded barrel; M30 x 1,5 |
| Dimensions                                          | 63 mm                      |
| Housing material                                    | plastic, PA12-GF30         |
| Active face                                         | plastic, PA12-GF30         |
| Max. fixing torque of coupling nut                  | 5 Nm                       |
| Wiring                                              | cable                      |
| Cable                                               | Ø 5,2, LifYY, PVC, 2 m     |
| Cable cross section                                 | 4 x 0,34 mm <sup>2</sup>   |
| Vibration resistance                                | 55 Hz (1 mm)               |
| Shock resistance                                    | 30 x g (11 ms)             |
| Degree of protection                                | IP67                       |
| <b>Switching status indication</b>                  | LED yellow                 |

## Capacitive sensor

### BC10-S30-VP4X

#### Accessories
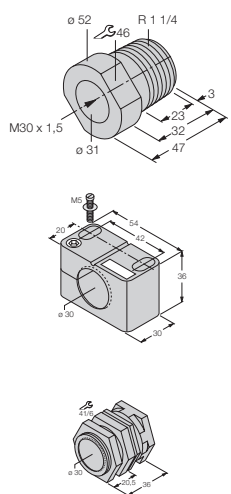
| Typ     | Ident-No. | Description                                                                                                                                          | Dimension drawing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAP-M30 | 6950013   | mounting adapter; material: Polypropylen; sensor replacement with filled container possible (adapter remains in container during sensor replacement) |  <p>The dimension drawing shows three technical illustrations of accessories. The top illustration is the MAP-M30 mounting adapter, a cylindrical part with dimensions: outer diameter 52, inner diameter 31, thread M30 x 1.5, and a radius R 1 1/4. The middle illustration is the BST-30B fixing clamp, a rectangular block with dimensions: width 64, height 38, and depth 30. The bottom illustration is the QM-30 quick-mount fixing clamp, a smaller rectangular block with dimensions: width 30, height 15, and depth 30.</p> |
| BST-30B | 6947216   | fixing clamp with dead-stop; material: PA6                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| QM-30   | 6945103   | quick-mount fixing clamp with dead-stop; material: chrome-plated brass external thread M36 x 1,5.                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |