Inductive sensor

Bi2-Q10S-AP6X



- **rectangular, height 10,2 mm**
- **side active face**
- **cable outlet to all sides possible**
- **plastic, PA12-GF20**
- **3-wire DC, 10...30 VDC**
- **normally open pnp output**
- **cable connection**

Wiring diagram



Type	Bi2-Q10S-AP6X
Ident-No.	1609360
Rated operating distance Sn	2 mm
Mounting mode	flush
Hysteresis (switching distance)	3... 15 %
Min. repeat accuracy	≤ 2 %
Temperature drift	≤ ± 10 %
Operating temperature	-25 ...+ 70 °C
Rated operational voltage (DC) U_B	10... 30 VDC
Max. ripple	≤ 10 % U_{pp}
Rated operational current (DC) I_e	≤ 150 mA
No-load current I_0	≤ 15 mA
Max. OFF-state current	≤ 0,1 mA
Max. switching frequency	≤ 2 kHz
Rated insulation voltage	≤ 0,5 kV
Output function	3-wire, normally open, PNP
Short-circuit protection	yes, cyclic
Max. voltage drop at I_e	≤ 1,8 V
Wire breakage / reverse polarity protection	yes / complete
Housing style	rectangular; Q10S
Dimensions	27,8 x 16 x 10,2 mm
Housing material	plastic, PA12-GF20
Active face	plastic, PA12-GF20
Wiring	cable
Cable	Ø 4, LifYY-11Y, PUR, 2 m
Cable cross section	3 x 0,25 mm^2
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 x g (11 ms)
Degree of protection	IP67
Switching status indication	LED yellow

Function principles

Inductive proximity switches are designed for wear-free non-contact detection of metal objects. For this they use a high-frequency electro-magnetic AC field that interacts with the target. With inductive sensors, this field is generated by an LC resonant circuit with a ferrite core coil.



Subject to change without notice • © Hans Turck GmbH & Co.KG 2002 • Edition: • 15.04.2004

Hans Turck GmbH & Co.KG • Postfach • D-45466 Mülheim an der Ruhr • Telefon 02 08/49 52-0 • Telefax 02 08/49 52-264

Inductive sensor

Bi2-Q10S-AP6X

Mounting instructions	minimum gap
Gap D	2 x B
Gap W	3 x Sn
Gap S	1 x B
Gap G	6 x Sn
Width of active face B	10,2 mm

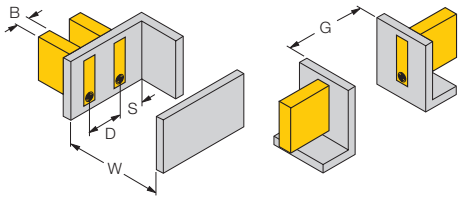

Subject to change without notice • © Hans Turck GmbH & Co.KG 2002 • Edition: • 15.04.2004

Hans Turck GmbH & Co.KG • Postfach • D-45466 Mülheim an der Ruhr • Telefon 02 08/49 52-0 • Telefax 02 08/49 52-264