

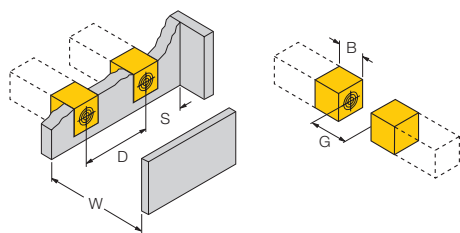


**Inductive sensor****Bi15U-CP40-AP6X2****Mounting instructions**



|       |        |
|-------|--------|
| Gap D | 2 x B  |
| Gap W | 3 x Sn |
| Gap S | 1 x B  |
| Gap G | 6 x Sn |

**Width of active face B**

40 mm



**Inductive sensor****Bi15U-CP40-AP6X2****Accessories**

| Typ        | Ident-No. | Description                                                                                                                        | Dimension drawing                                                                   |
|------------|-----------|------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| SG40       | 69500     | protective housing; housing material: PA (per UL94/V-2); cover: PBT-GF30; for harsh environments; protection degree IP68, 5 m w.g. |  |
| JS 025/037 | 69429     | mounting rail; material: VA 1.4301                                                                                                 |  |