



Inductive sensor

Bi5U-EG18SK-VP4X

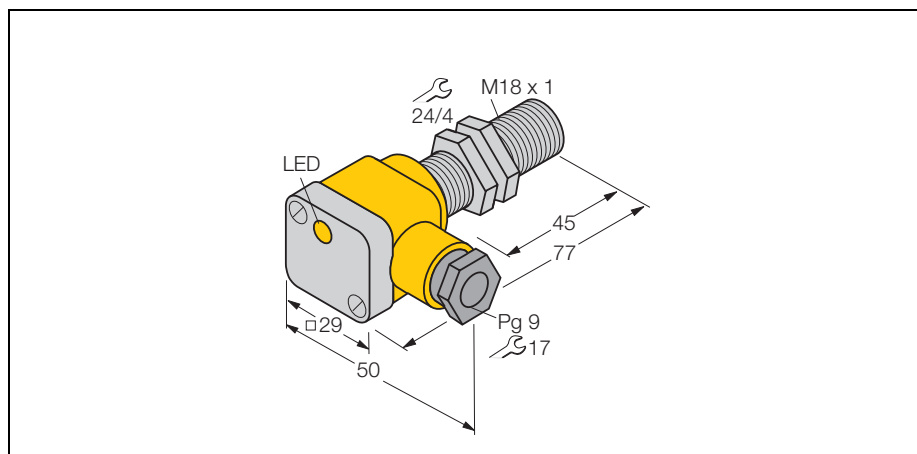

- threaded barrel, M18 x 1
- stainless steel, 1.4301
- factor 1 for all metals
- degree of protection IP68
- magnetic field immune
- extended temperature range
- high switching frequency
- 4-wire DC, 10...65 VDC
- SPDT, pnp output
- terminal chamber

Wiring diagram



Function principles

Inductive proximity switches are designed for wear-free non-contact detection of metal objects. Due to a ferrite-less 3-coil system, Uprox factor 1 sensor have distinct advantages. The detect all metals at the same switching distance, are magnetic field immune and feature large switching distances.


Type	Bi5U-EG18SK-VP4X
Ident-No.	1581601
Rated operating distance S_n	5 mm
Mounting mode	flush
Hysteresis (switching distance)	3... 15 %
Min. repeat accuracy	$\leq 2 \%$
Temperature drift	$\leq \pm 10 \%$
Operating temperature	$\leq \pm 15 \%$, $\leq -25 \text{ °C}$ v $\geq +70 \text{ °C}$ -30 ...+ 85 °C
Rated operational voltage (DC) U_B	10... 65 VDC
Max. ripple	$\leq 10 \%$ U_{pp}
Rated operational current (DC) I_e	$\leq 200 \text{ mA}$
No-load current I_0	$\leq 15 \text{ mA}$
Max. OFF-state current	$\leq 0,1 \text{ mA}$
Max. switching frequency	$\leq 2,5 \text{ kHz}$
Rated insulation voltage	$\leq 0,5 \text{ kV}$
Output function	4-wire, complementary, PNP
Short-circuit protection	yes, cyclic
Max. voltage drop at I_e	$\leq 1,8 \text{ V}$
Wire breakage / reverse polarity protection	yes / complete
Protection class	□
Housing style	threaded barrel; M18 x 1
Dimensions	77 mm
Housing material	metal, A2 1.4301 (AISI 304)
Active face	plastic, PBT
Max. fixing torque of coupling nut	25 Nm
Wiring	terminal chamber
Clamping ability	$\leq 1,5 \text{ mm}^2$
External diameter cabel	4,5... 8 mm
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 x g (11 ms)
Degree of protection	IP68
Switching status indication	LED yellow
Included with sensor	cable gland, 2x plastic seals

Inductive sensor**Bi5U-EG18SK-VP4X****Mounting instructions**


	minimum gap
Gap D	2 x B
Gap W	3 x Sn
Gap T	3 x B
Gap S	1,5 x B
Gap G	6 x Sn

Diameter of active face B

Ø 18 mm

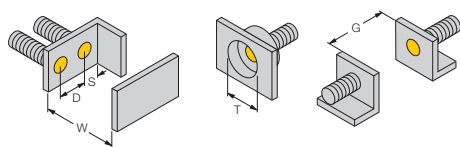

Inductive sensor**Bi5U-EG18SK-VP4X****Accessories**

Typ	Ident-No.	Description	Dimension drawing
QM-18	6945102	quick-mount fixing clamp with dead-stop; material: chrome-plated brass external thread M24 x 1,5.	
BST-18B	6947214	fixing clamp with dead-stop; material: PA6	