


Alternative Connectors


- .SMA Reverse Polarity Plug(female)
P/N: C321AH-925
- .SMA Reverse Thread Plug(male)
P/N: C321AT-925
- Alternative Frequency Band 824-896 MHz
 - .SMA Plug(male)
P/N: C321AM-860
 - .SMA Reverse Polarity Plug(female)
P/N: C321AH-860
 - .SMA Reverse Thread Plug(male)
P/N: C321AT-860

- Electrical Properties:**
- Frequency Range: 890~960 MHz
 - Impedance: 50Ω nominal
 - VSWR: <1.9:1
 - Gain: 0 dBi
 - Radiation: Omni
 - Polarization: Vertical
 - Wave: 1/4 Wave Helix


- Mechanical Properties:**
- Connector: SMA Plug(male)
 - Material: Polyurethane(Black)
 - Whip: Brass with black chrome plating
 - Connector: -20°C to +65°C
 - Operation Temp.: -30°C to +75°C
 - Storage Temp.:

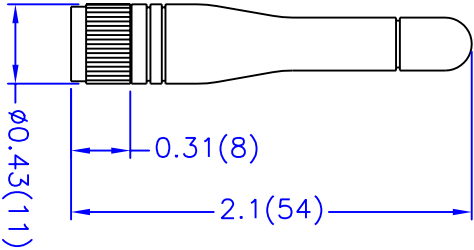

E-Plane Pattern @ 925 MHz

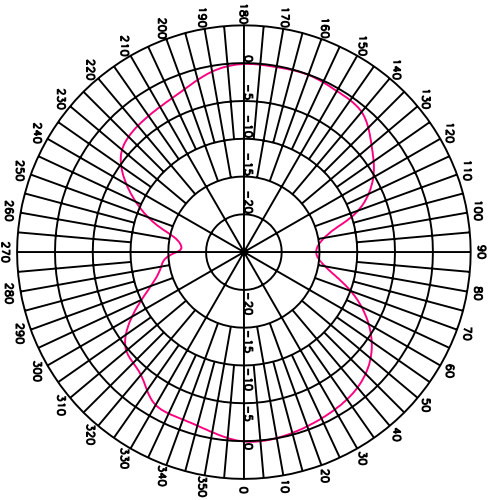

H-Plane Pattern @ 925 MHz

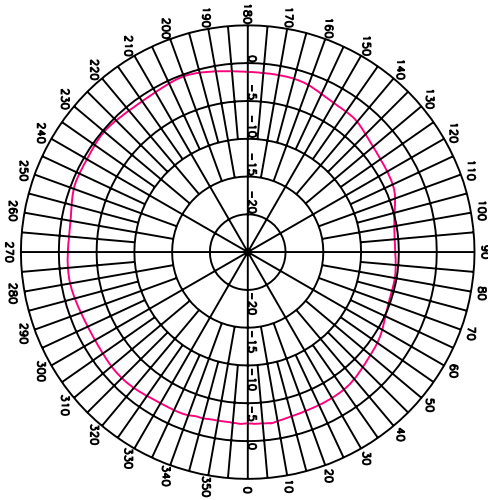

TITLE	900MHz Swivel Antenna—321 Model		VER
UNIT	DWG. NO.	S321AM—925	
in. (mm)			
SCALE			
NONE			
NEARSON			