

**PRINCIPAL SPECIFICATIONS**


Model Number	Frequency Range, GHz	Nominal Coupling, ^a dB	Frequency Sensitivity, dB, Max.	Directivity, dB, Min.	*Insertion Loss, dB, Max.	VSWR, Main Line, Outline Ref.
CBN-30M-1.5G	1.0 - 2.0	30 ± 1	± 0.75	18	0.2	1.15:1 4
CBN-30M-3G	2.0 - 4.0	30 ± 1	± 0.75	18	0.2	1.15:1 2
CBN-30M-4G	2.6 - 5.2	30 ± 1	± 0.75	18	0.2	1.20:1 2
CBN-30M-6G	4.0 - 8.0	30 ± 1	± 0.75	18	0.2	1.30:1 1
CBN-30M-8G	5.0 - 11.0	30 ± 1	± 0.50	15	0.2	1.30:1 1
CBN-30M-9G	7.0 - 11.0	30 ± 1	± 0.50	16	0.2	1.30:1 1
CCN-30M-2G	1.0 - 4.0	30 ± 1	± 0.60	15	0.2	1.15:1 5
CCN-30M-3G	1.5 - 4.5	30 ± 1	± 0.60	18	0.2	1.20:1 4
CCN-30M-5G	2.0 - 8.0	30 ± 1	± 0.60	16	0.2	1.30:1 3
CCN-35M-6G	1.0 - 11.0	35 ± 1.5	± 1.50	15	0.2	1.30:1 5
CCN-30M-8G	4.0 - 12.0	30 ± 1	± 0.60	15	0.2	1.30:1 2

^aCoupling is referenced to the input and includes frequency sensitivity

* Insertion Loss including Coupling "Loss"

CONNECTOR, RECEPTACLE, FEMALE, SMA TYPE, MATES WITH CONNECTOR, PLUG, MALE PER MIL-C-39012

CONNECTOR, RECEPTACLE, FEMALE, N TYPE, MATES WITH CONNECTOR, PLUG, MALE PER MIL-C-39012 TYP.

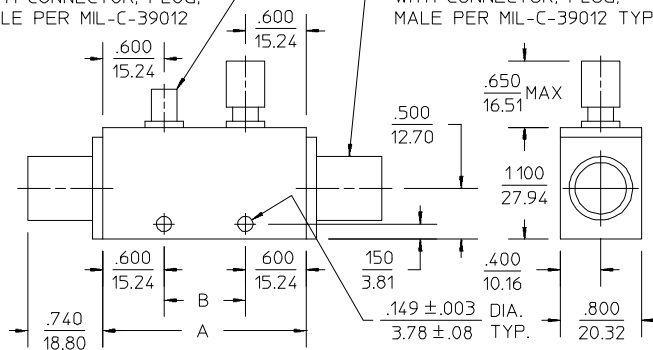

OUTLINE	A	B	WT. OZ. (G)
1	2.000 50.80	.800 20.32	4.66 (132)
2	2.500 63.50	1.300 33.02	5.29 (150)
3	3.000 76.20	1.800 45.72	5.93 (168)
4	3.500 88.90	2.300 58.42	6.56 (186)
5	3.850 97.79	2.650 67.31	7.05 (200)

NOTES:
1. Tolerance on 3 place decimals ±.020(.51) except as noted.
2. Dimensions in inches over millimeters.

20Feb96

GENERAL SPECIFICATIONS

Peak Power:	10 kW max.
CW Input:	600 W max.
Impedance:	50 Ω nom.
Operating Temperature:	- 55° to +85°C
Other Coupling Values:	Available
Other Frequency Bands:	Available

General Notes:

1. The octave band CBN series and multi-octave CCN series of high power Directional Couplers are designed to monitor signals with minimal perturbation to the main line. Each coupler uses air-line coupling technology for simple reliable operation. They are well suited to transmitter carrier power monitoring, leveling and VSWR protection circuits.
2. These units comply with MIL-C-15370 and can be supplied screened for compliance with additional specifications you designate for military and aerospace applications requiring higher reliability.