



DTC1573 @ 19.44 MHz

SMD FR4 19.9 x 9.4 mm

TCXO

DTC1573
18-05-2000



Frequency: 19.44 MHz

Package Size (h = 7.0 mm)



Features:

Operating Temperature	-40°C~+85°C
Frequency Stability	±7 ppm
Ageing @ 25°C	±1 ppm max./year
Overall Stability (1)	±15 ppm

Supply voltage	+5 V ±5%
Current consumption	20 mA max.

Rise & fall time	5 ns max.
Load HCMOS/TTL-compatible	15 pF max
Duty cycle	40/60

(1) Including 25°C calibration, temperature, ageing 10 years, Vcc, load. changes

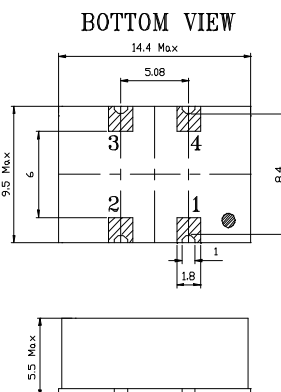

SHORT FORM Data Sheet - For more details, please contact us

SALES OFFICES:

Benelux: +33 (0) 1 49 88 49 00 / **Germany:** +49 (0) 89 820 79620 / **Nordic:** +46 (0) 8 59030300
France: +33 (0) 1 49 88 49 00 / **Italy:** +39 (0) 738 8869 / **Spain:** +33 (0) 1 49 88 49 00 / **UK:** +44 (0) 1256 883340
USA: +1 (623) 780-1995 / **Asia-Pacific:** +33 (0) 5 56 46 66 84

WEB SITE: <http://www.temex-components.com>

E-mail: adsl@temex.fr

Specifications are subject to change without notice