




DVC2255 @ 155.52 MHz

SMD FR4 19.9 x 9.4 mm

VCXO

DVC2255
15-05-2000




Frequency: 155.52 MHz

Package Size (mm)

Features:

Operating Temperature	0°C~+70°C
Frequency Stability	±20 ppm
Ageing @ 25°C	±5 ppm max/year
Overall Stability (1)	±60 ppm
Supply voltage	+5 V ±5%
Current consumption	50 mA max.
Pulling Range	>±85 ppm and <±120 ppm
Rise & fall time	6 ns max.
Load TTL	15 pF
Duty cycle	40/60

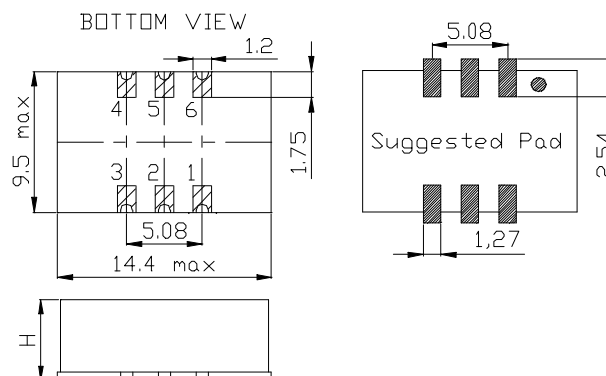

(1) Including 25°C calibration, temperature, ageing 10 years, Vcc, load. changes

SHORT FORM Data Sheet - For more details, please contact us

SALES OFFICES:

Benelux: +33 (0) 1 49 88 49 00 / **Germany:** +49 (0) 895164-0 / **Nordic:** +46 (0) 8 59030300
France: +33 (0) 1 49 88 49 00 / **Italy:** +39 (0) 738 8869 / **Spain:** +33 (0) 1 49 88 49 00 / **UK:** +44 (0) 1256 883340
USA: +1 (623) 780-1995 / **Asia-Pacific:** +33 (0) 5 56 46 66 84

WEB SITE: <http://www.temex-components.com>

E-mail: adsl@temex.fr

Specifications are subject to change without notice