



# DVC2365 @ 38.88 MHz

SMD FR4 19.9 x 9.4 mm

## VCXO

DVC2365  
15-05-2000



**Frequency:** 38.880 MHz

### Features:

Operating Temperature  
Frequency Stability  
Ageing @ 25°C  
Overall Stability (1)

0°C~+70°C  
±8 ppm  
±3 ppm max/year  
±20 ppm

Supply voltage  
Current consumption


+3.3 V ±5%  
30 mA max.

Pulling Range  
Rise & fall time  
Load TTL  
Duty cycle


>±80 ppm and <±120 ppm  
8 ns max.  
15 pF max  
40/60

(1) Including 25°C calibration, temperature, ageing 15 years, Vcc, load. changes

**Package Size (mm)**

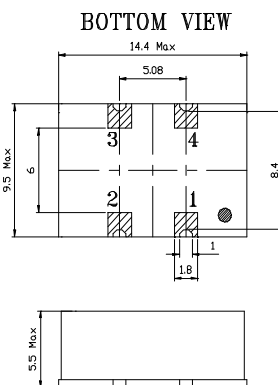

**Suggested Pad**



SHORT FORM Data Sheet - For more details, please contact us

### SALES OFFICES:

**Benelux:** +33 (0) 1 49 88 49 00 / **Germany:** +49 (0) 895164-0 / **Nordic:** +46 (0) 8 59030300  
**France:** +33 (0) 1 49 88 49 00 / **Italy:** +39 (0) 738 8869 / **Spain:** +33 (0) 1 49 88 49 00 / **UK:** +44 (0) 1256 883340  
**USA:** +1 (623) 780-1995 / **Asia-Pacific:** +33 (0) 5 56 46 66 84

**WEB SITE:** <http://www.temex-components.com>

**E-mail:** [adsl@temex.fr](mailto:adsl@temex.fr)

*Specifications are subject to change without notice*