
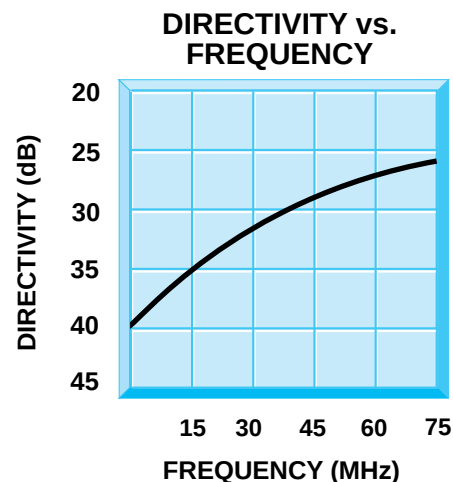
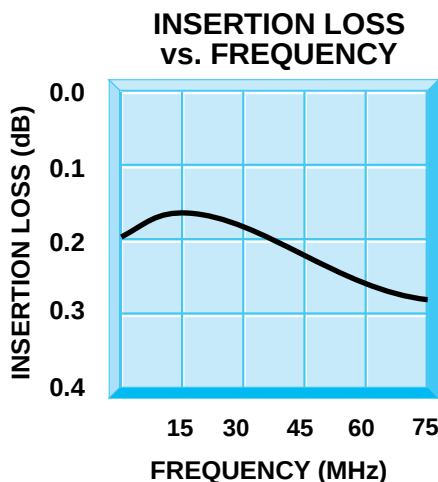



0.75 to 75 MHz 10 dB Directional Couplers

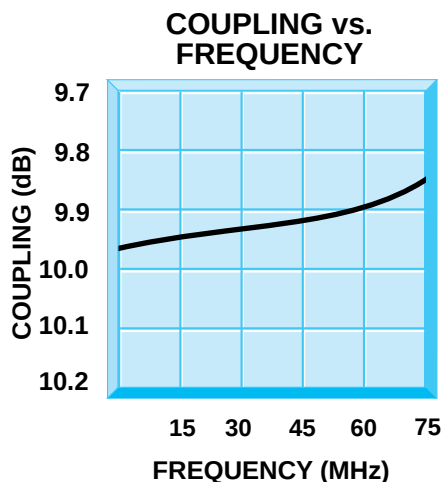

Guaranteed Specifications (-54° to +85°C)


Frequency Range	0.75 to 75 MHz
Coupling	10 ± 0.1 dB
Coupling Flatness	±0.10 dB Max.
Insertion Loss	0.35 dB Max.
Directivity	30 dB
VSWR	1.15:1 Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

Functional Schematic

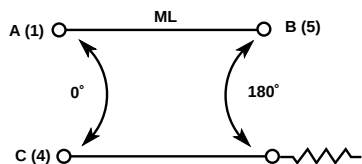

Mechanical Outline

D3-20006

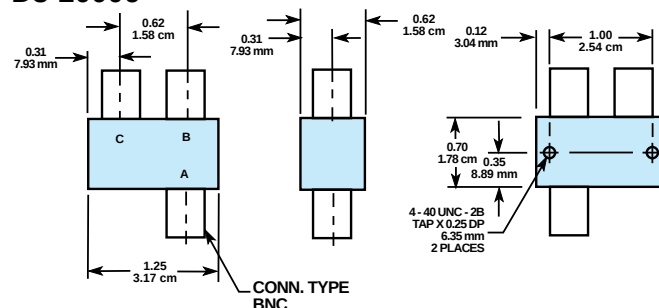

D3-20005

