
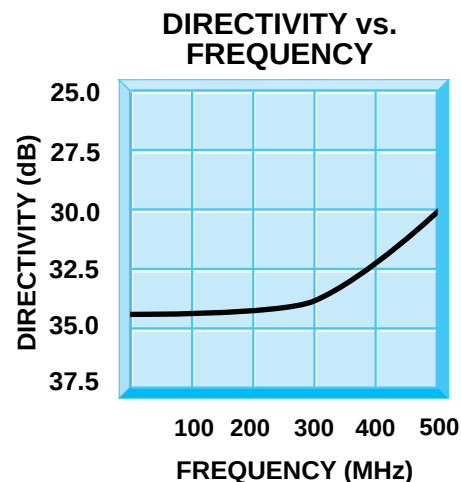
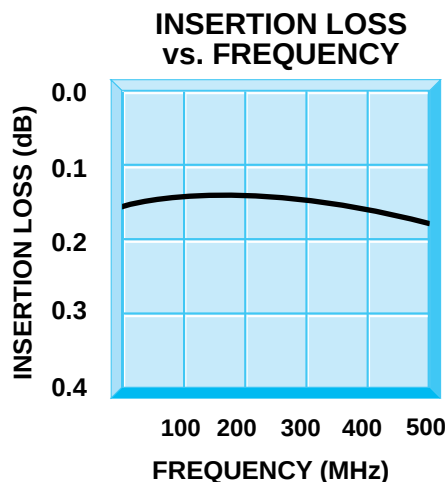


D3-40007 / 40008


10 to 500 MHz 15 dB Directional Couplers

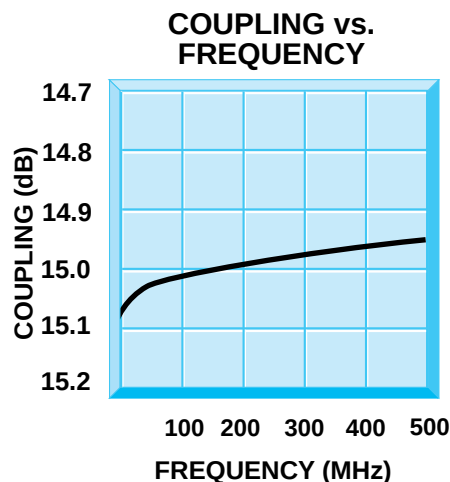

Guaranteed Specifications (-54° to +85°C)


Frequency Range	10 to 500 MHz
Coupling	15 ± 0.2 dB
Coupling Flatness	±0.20 dB Max.
Insertion Loss	0.35 dB Max.
Directivity	25 dB Min.
VSWR	1.2:1 Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

Functional Schematic




Mechanical Outline

D3-40007

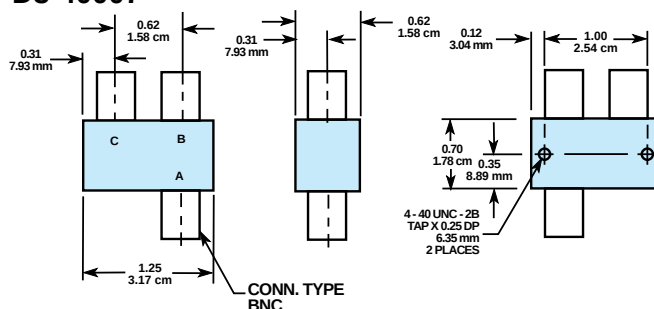

D3-40008

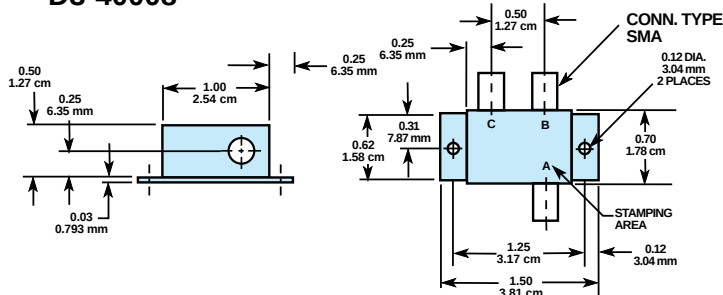

SIGNAL
TECHNOLOGY CORPORATION
OLEKTRON OPERATION

28 Tozer Road • Beverly, MA 01915-5579
Tel. 978.922.0019 • Fax 978.927.9328