



10 to 1000 MHz 15 dB Directional Coupler

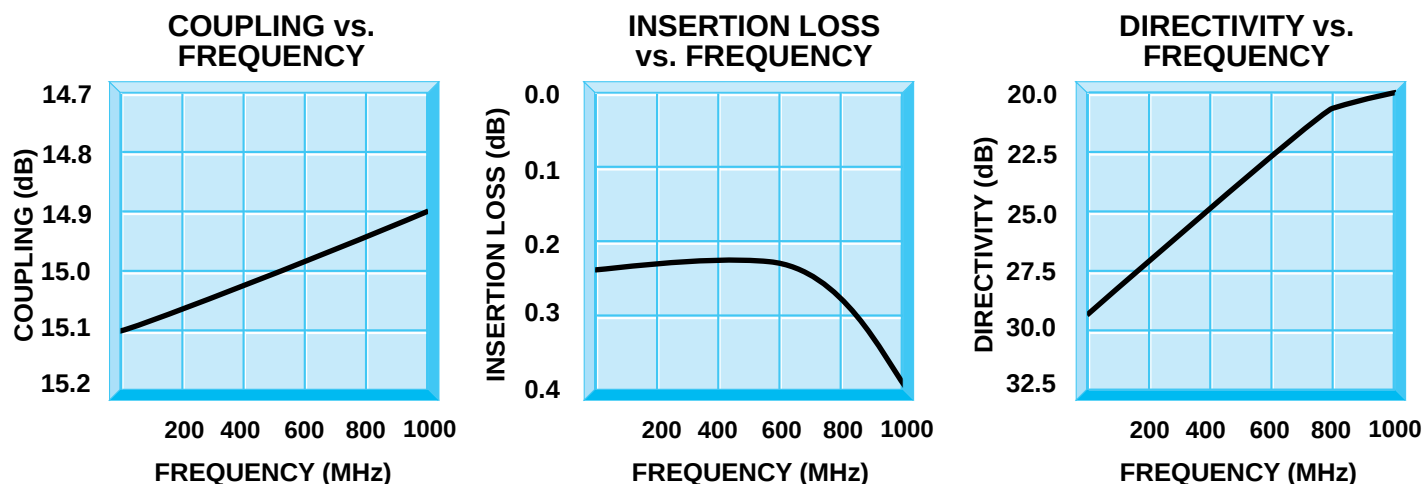

Guaranteed Specifications (-54° to +85°C)

Frequency Range	10 to 1000 MHz
Coupling	15 ± 0.35 dB
Coupling Flatness	±0.35 Max.
Insertion Loss	0.65 dB Max.
Directivity	20 dB Min.
VSWR	1.4:1 Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

Mechanical Outline

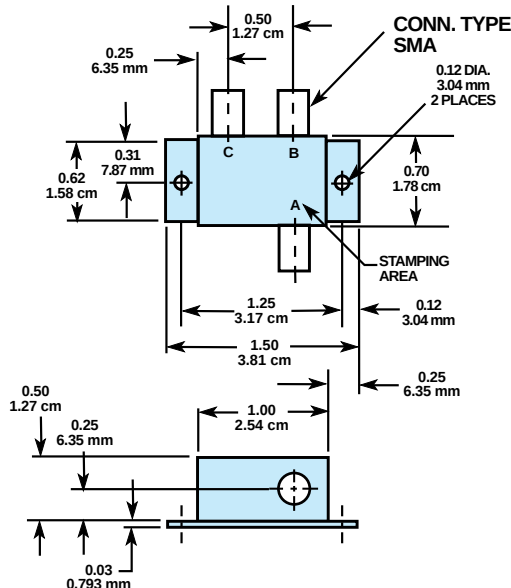

Functional Schematic

