
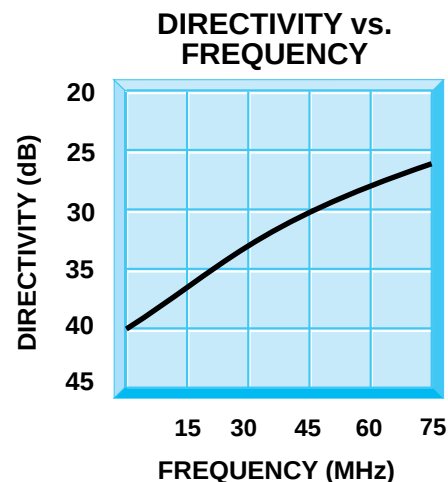
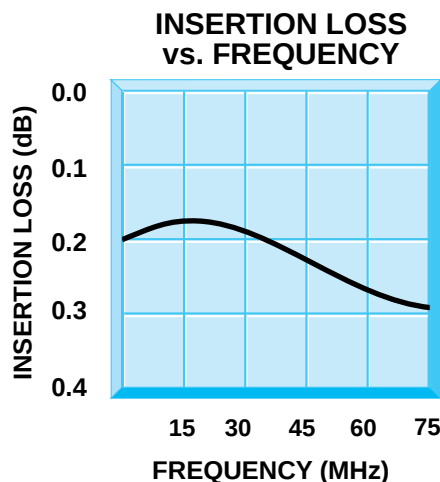


D4-20005 / 20006

0.75 to 75 MHz 10 dB Bi-Directional Couplers

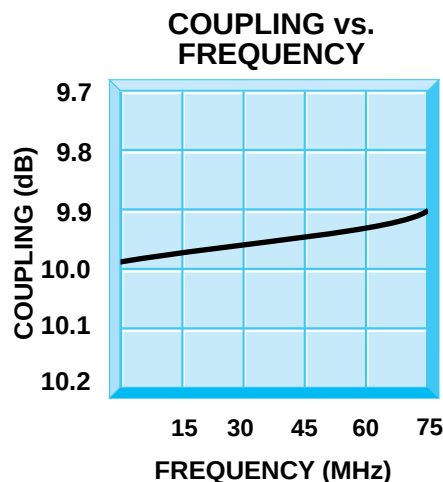


Guaranteed Specifications (-54° to +85°C)

Frequency Range	0.75 to 75 MHz
Coupling	10 ± 0.2 dB
Coupling Flatness	±0.2 dB Max.
Insertion Loss	0.35 dB Max.
Directivity	25 dB Min.
VSWR	1.15:1 Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.


Mechanical Outline

D4-20006


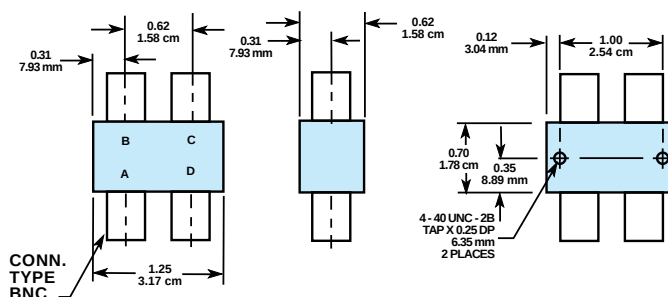


Functional Schematic

D4-20006



D4-20005

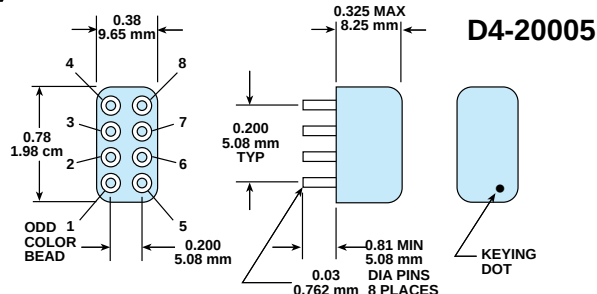

SIGNAL
TECHNOLOGY CORPORATION
OLEKTRON OPERATION

28 Tozer Road • Beverly, MA 01915-5579
Tel. 978.922.0019 • Fax 978.927.9328