


D4-40006 / 40007 / 40008


10 to 500 MHz 10 dB Bi-Directional Couplers

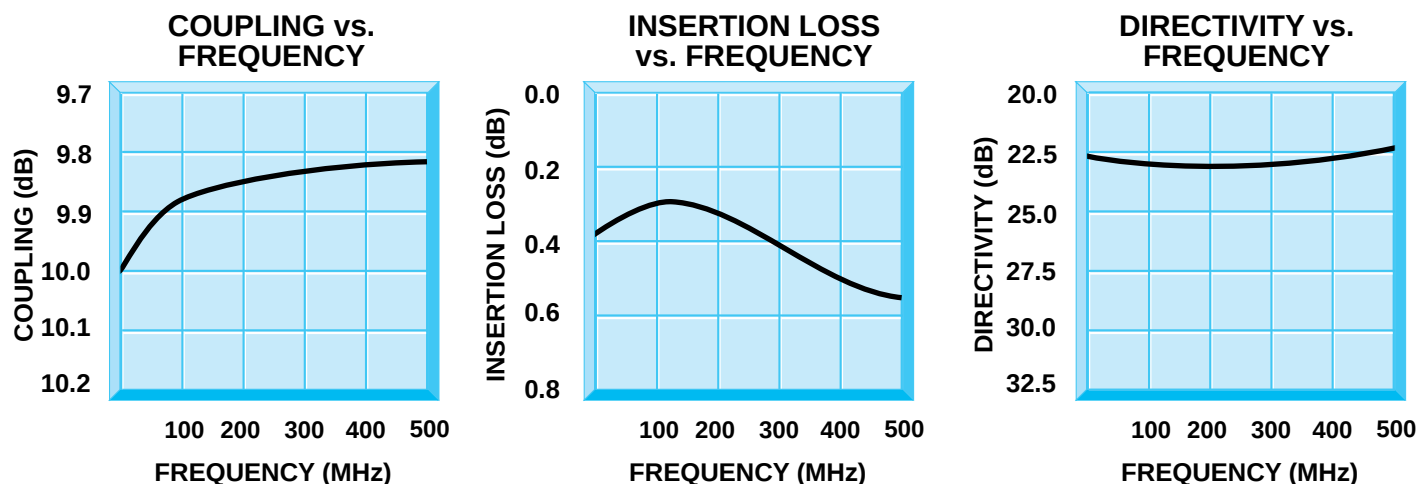


Guaranteed Specifications (-54° to +85°C)

Frequency Range	10 to 500 MHz
Coupling	10 ± 0.3 dB
Coupling Flatness	±0.3 dB Max.
Insertion Loss	0.5 dB Max.
Directivity	20 dB Min.
VSWR	1.2:1 Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

Functional Schematic



Mechanical Outline

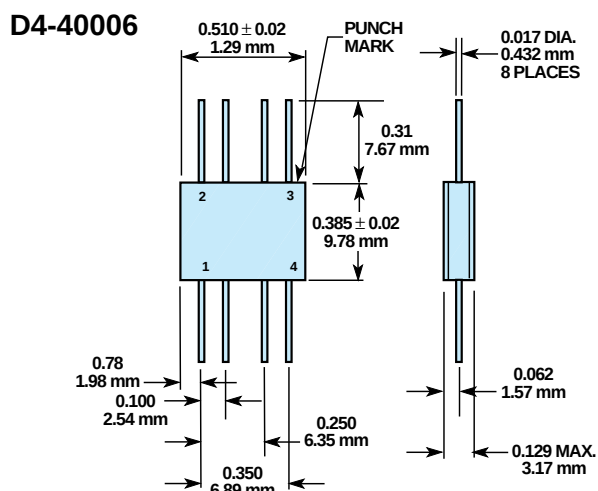

Additional Mechanical Outlines on next page

SIGNAL
TECHNOLOGY CORPORATION
OLEKTRON OPERATION


28 Tozer Road • Beverly, MA 01915-5579
Tel. 978.922.0019 • Fax 978.927.9328

D4-40006 / 40007 / 40008


10 to 500 MHz 10 dB Bi-Directional Couplers

Mechanical Outline

D4-40007

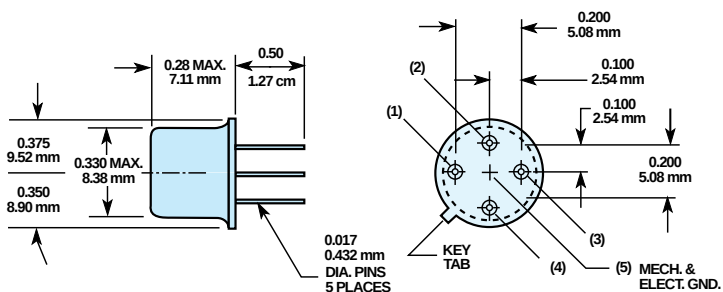


D4-40008

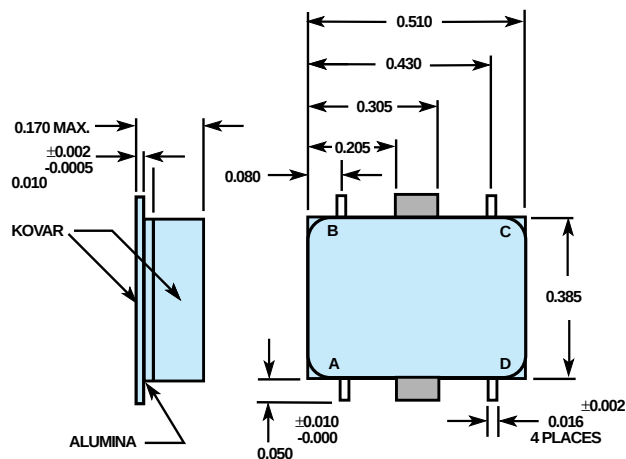


Functional Schematic

D4-40007



Functional Schematic

D4-40008



SIGNAL
 TECHNOLOGY CORPORATION
 OLEKTRON OPERATION

28 Tozer Road • Beverly, MA 01915-5579
 Tel. 978.922.0019 • Fax 978.927.9328