


D4-40009 / 40010


10 to 500 MHz 10 dB Bi-Directional Couplers

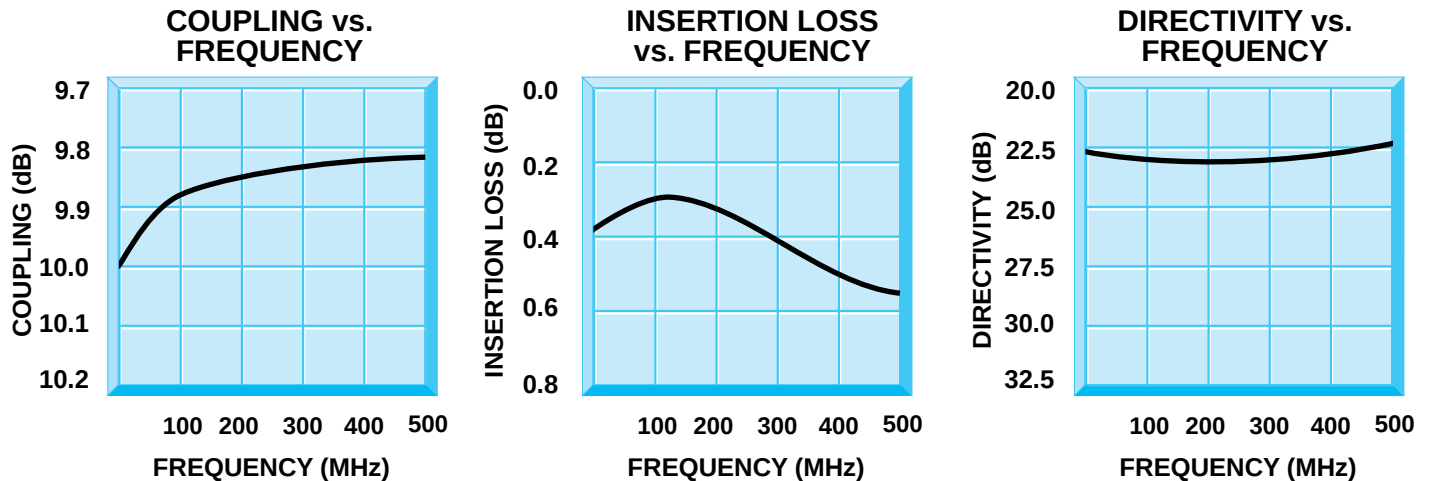

Guaranteed Specifications (-54° to +85°C)


Frequency Range	10 to 500 MHz
Coupling	10 ± 0.3 dB
Coupling Flatness	±0.3 dB Max.
Insertion Loss	0.65 dB Max.
Directivity	20 dB Min.
VSWR	1.25:1 Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

Functional Schematic




Mechanical Outline

D4-40009

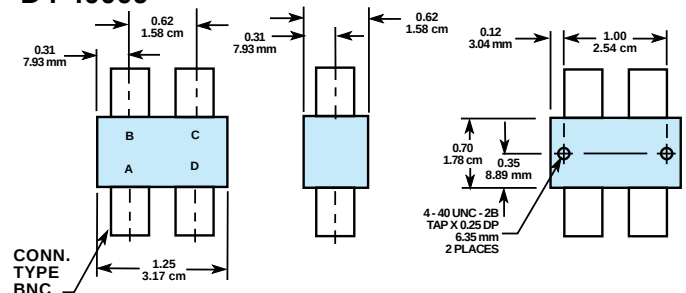

D4-40010

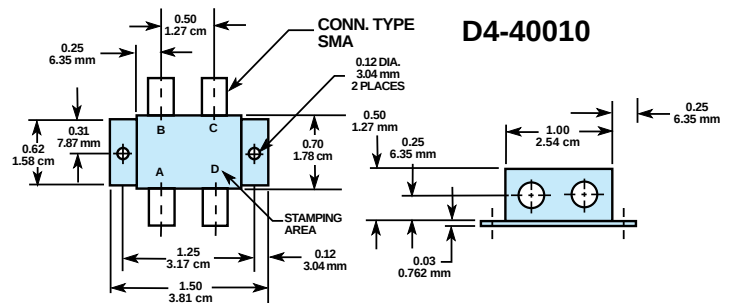

SIGNAL
TECHNOLOGY CORPORATION
OLEKTRON OPERATION

28 Tozer Road • Beverly, MA 01915-5579
Tel. 978.922.0019 • Fax 978.927.9328