
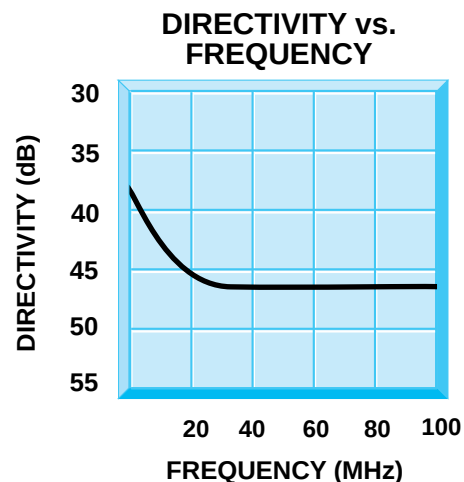
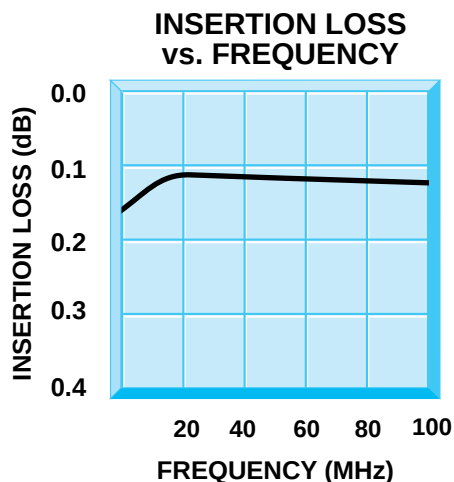


D4-20001 / 20002


1 to 100 MHz 20 dB Bi-Directional Couplers

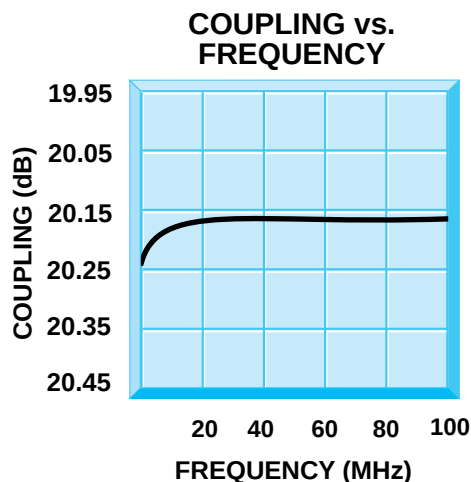

Guaranteed Specifications (-54° to +85°C)


Frequency Range	1 to 100 MHz
Coupling	20.25 ± 0.25 dB
Coupling Flatness	±0.2 dB Max.
Insertion Loss	0.3 dB Max.
Directivity	20 dB Min.
VSWR	1.15:1 Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

Functional Schematic




Mechanical Outline

D4-20001

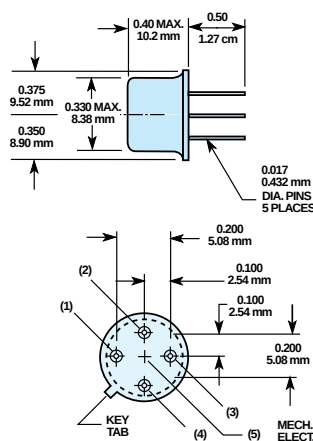

D4-20002

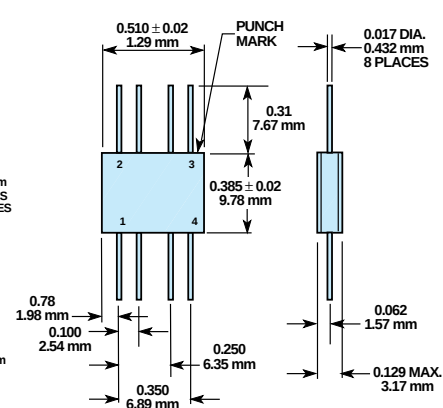

SIGNAL
TECHNOLOGY CORPORATION
OLEKTRON OPERATION

28 Tozer Road • Beverly, MA 01915-5579
Tel. 978.922.0019 • Fax 978.927.9328