
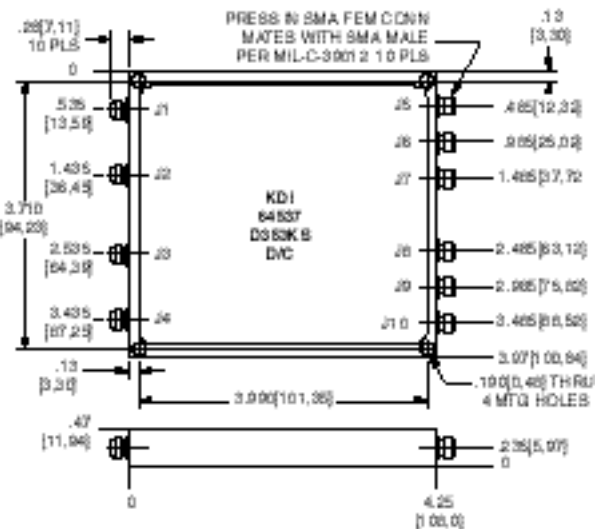


DIVIDER/COMBINERS, NETWORK

ELECTRICAL SPECIFICATIONS

Model:	D353KS
Frequency Range:	890-960 MHz
Insertion Loss:	3.5 dB Maximum, (J5-J1, J7-J2, J8-J3, J10-J4), 3.2 dB Typical
Insertion Loss:	7.0 dB Maximum, (J6-J1, J6-J2, J9-J3, J9-J4), 6.3 dB Typical
Isolation:	25 dB Minimum, (J5-J7, J8-J10) 45 dB Typical; (J2-J5, J1-J7, J4-J8, J3-J10) 43 dB Typical; (J5-J6, J6-J7, J8-J9, J9-J10) 27 dB Typical; (J1-J2, J3-J4) 28 dB Typical
Amplitude Unbalance:	± 25 dB Maximum, (J5-J1, J7-J2, J8-J3, J10-J4) ± 15 dB Typical, ± 5 dB Maximum (J6-J1, J6-J2, J9-J3, J9-J4) ± 3 dB Typical
VSWR:	1.2:1 Maximum
Impedance:	50 OHMS

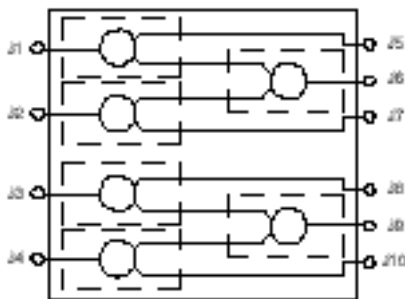


2 X 3

DIVIDER/POWER

ELECTRICAL SPECIFICATIONS

Model:	D344MS
Frequency Range:	850-900 MHz
Insertion Loss:	0.8 dB Maximum
Isolation:	20 dB Minimum
Amplitude Unbalance:	± 0.2 dB Maximum
VSWR:	1.3:1 Maximum for all ports

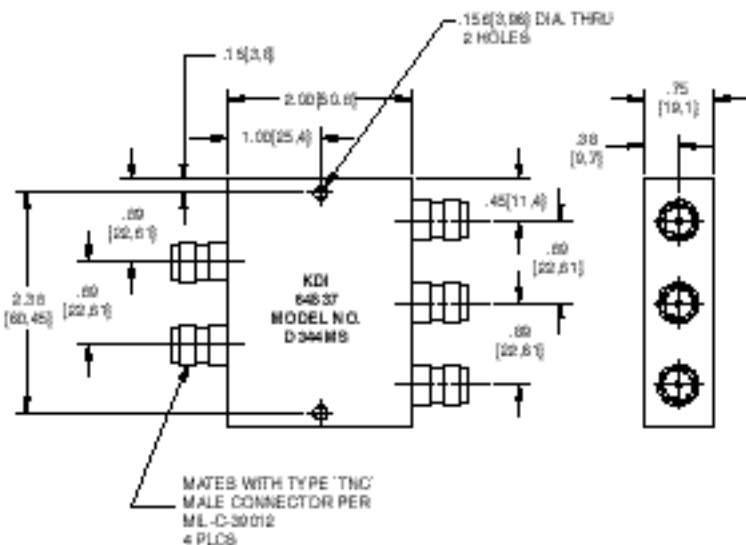KEY: Inches[Millimeters] .XX $\pm$.03 .XXX $\pm$.010 [X $\pm$ 0.8 .XX $\pm$ 0.25]

60 South Jefferson Road, Whippany, NJ 07981
 Tel: 973-887-8100 • Fax: 973-884-0445
 E-Mail: kdisales@aol.com
 See us on the web @ www.kditriangle.com