

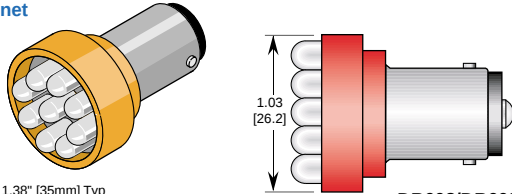
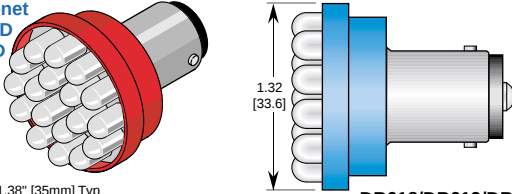
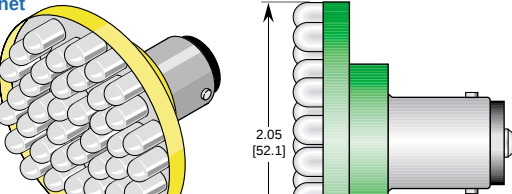


LED[®] Double Contact Automotive Style Intermediate Base

15mm DC Bayonet Based LED Lamps

Miniature Packages	Replaces Incandescent	Part Number	LED Color	Wave-length λp(nm)	Electrical-Optical Data (Ta = 25° C) Typ	
					Operating Voltage & Current	Intensity mcd/LED
DC Bayonet 6/7 LED Cluster  Options DB607 OAL 1.38" [35mm] Typ DBM607 OAL 1.75" [50mm] Typ DBL607 OAL 2.20" [56mm] Typ	6,64,68,71,72,82,88, 90,94,96,99,304,306, 308,1076,1130,1134, 1142,1144,1152, 1158,1176,1178, 1184,1196,1204, 1252,1493,1497, 1612,1618,1638, 1692	DB607CR3K-XXV-BP	UL Red	660	DB606 (6-14V) Red, Org, Yel	3000
		DB607CE3K-XXV-BP	SPRed	633	DB606 (6-24V) Whit, Grn, Blu	3000
		DB607CO3K-XXV-BP	SPOrange	612	XX =	3000
		DB607CY3K-XXV-BP	SPYellow	595	6V (60-90mA)	3000
		DB607CW6K-XXV-BP	White	8000K	12/14V (30-40mA)	6000
		DB607CAG10K-XXV-BP	A.Green	525	24V (15-20mA)	10000
		DB607CBG3K-XXV-BP	B.Green	505	28V (15-20mA)	3000
		DB607CB3K-XXV-BP	SP Blue	470	36V (15-20mA)	3000
					48V (15-20mA)	3000
					60V (15-20mA)	3000
DC Bayonet 8/9 LED Cluster  Options DB609 OAL 1.38" [35mm] Typ DBM609 OAL 1.75" [50mm] Typ DBL609 OAL 2.20" [56mm] Typ	6,88,94,306,308,310, 312,1076,1130,1134, 1142,1144,1152, 1158,1176,1184, 1196,1197,1204, 1376,1493,1497, 1612,1618,1638, 1692	DB609CR3K-XXV-BP	UL Red	660	DB608 (6-14V) Red, Org, Yel	3000
		DB609CE3K-XXV-BP	SPRed	633	DB608 (6-24V) Whit, Grn, Blu	3000
		DB609CO3K-XXV-BP	SPOrange	612	XX =	3000
		DB609CY3K-XXV-BP	SPYellow	595	6V (80-120mA)	3000
		DB609CW6K-XXV-BP	White	8000K	12/14V (40-45mA)	6000
		DB609CAG10K-XXV-BP	A.Green	525	24V (20-30mA)	10000
		DB609CBG3K-XXV-BP	B.Green	505	28V (15-20mA)	3000
		DB609CB3K-XXV-BP	SP Blue	470	36V (15-20mA)	3000
					48V (15-20mA)	3000
					60V (15-20mA)	3000
DC Bayonet 18/19 LED & 30 LED Cluster  Options DB619 OAL 1.38" [35mm] Typ DBM619 OAL 1.75" [50mm] Typ DBL619 OAL 2.20" [56mm] Typ	310,312	DB619CR3K-XXV-BP	UL Red	660	DB618 (12/14V) Red, Org, Yel	3000
		DB619CE3K-XXV-BP	SPRed	633	DB618 (12-28V) Whit, Grn, Blu	3000
		DB619CO3K-XXV-BP	SPOrange	612	XX =	3000
		DB619CY3K-XXV-BP	SPYellow	595	12/14V (90-120mA)	3000
		DB619CW6K-XXV-BP	White	8000K	24V (45-60mA)	6000
		DB619CAG10K-XXV-BP	A.Green	525	28V (30-40mA)	10000
		DB619CBG3K-XXV-BP	B.Green	505	48V (15-20mA)	3000
		DB619CB3K-XXV-BP	SP Blue	470	60V (15-20mA)	3000
					72V (15-20mA)	3000
DC Bayonet 40 LED Cluster  Options DB640 OAL 1.38" [35mm] Typ DBM640 OAL 1.75" [50mm] Typ DBL640 OAL 2.20" [56mm] Typ	73D,976,R24	DB640CR3K-XXV-BP	UL Red	660	XX =	3000
		DB640CE3K-XXV-BP	SPRed	633	12/14V (120-200mA)	3000
		DB640CO3K-XXV-BP	SPOrange	612	24V (80-120mA)	3000
		DB640CY3K-XXV-BP	SPYellow	595	28V (80-120mA)	3000
		DB640CW6K-XXV-BP	White	8000K	36V (60-80mA)	6000
		DB640CAG10K-XXV-BP	A.Green	525	48V (40-60mA)	10000
		DB640CBG3K-XXV-BP	B.Green	505	60V (40-60mA)	3000
		DB640CB3K-XXV-BP	SP Blue	470	72V (30-40mA)	3000

Consult Factory if SAE Certification is Required

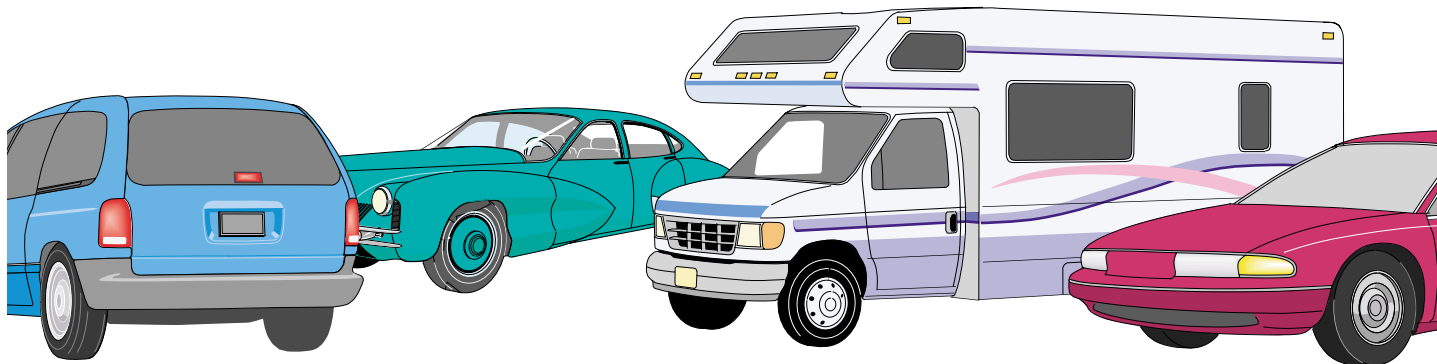

Log # 109B Rev 07-2000