

Circulator

1 1/2" Coaxial

Model: DSM1061-A

Application - DEFENSE


- ♦ Military
- ♦ TACAN

Benefits

- ♦ Low Loss
- ♦ Low Mass
- ♦ Wide Temperature Range
- ♦ Superior EMC Characteristics

Features

- ♦ Robust Construction
- ♦ Magnetically Shielded
- ♦ Options: Orientation, Finish, Connector Style
- ♦ Available as an Isolator

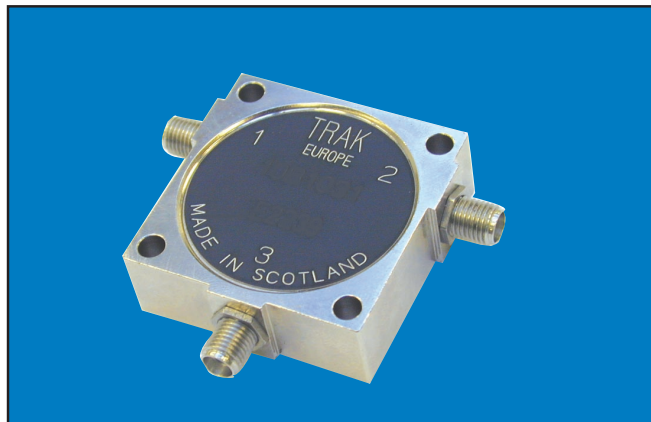


Specifications

Parameter	Specification			Unit
Frequency	950 - 1225			MHz
	Min	Typ	Max	
Isolation	18	20	-	dB
Insertion Loss	-	0.45	0.5	dB
Return Loss	17.7	20	-	dB

Parameter	Specification			Unit
Operating Temp.	Min	Typ	Max	°C
	-54	-	+95	
Forward Power	-	-	300	W
Interface	SMA Female			-

Drawing

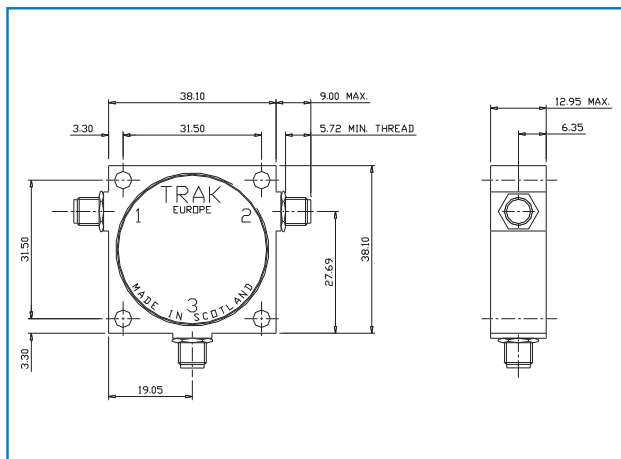

Dimensions: mm

TRAKcom

TRAK Microwave Limited
Dunsinane Avenue, Dundee, Scotland DD2 3QF
Phone: +44 (0)1382 427 200 ♦ Fax: +44 (0)1382 833 599
E-mail: trakeurope@trak.com ♦ www.trak.com

TRAKcom