

Isolator Iso-Adaptor Model: DSS1019-A

Application - SPACE

- ♦ Multi-Media Satellites
- ♦ Low Noise Amplifiers

Benefits

- ♦ Excellent Performance
- ♦ Low Mass
- ♦ Space Qualified


Features

- ♦ Magnetically Shielded
- ♦ Modular Design
- ♦ +/-90 180 Degree Connection Options



Specifications

Parameter	Specification			Unit	Parameter	Specification			Unit
Frequency	13750 to 14500			MHz		Min	Typ	Max	
	Min	Typ	Max		Operating Temp.	-10	-	+70	°C
Isolation	23	25	-	dB	Forward Power	-	-	.1	W
Insertion Loss	-	0.3	0.35	dB	Reverse Power	-	-	1	W
Return Loss	21	23	-	dB	Interface	75			-

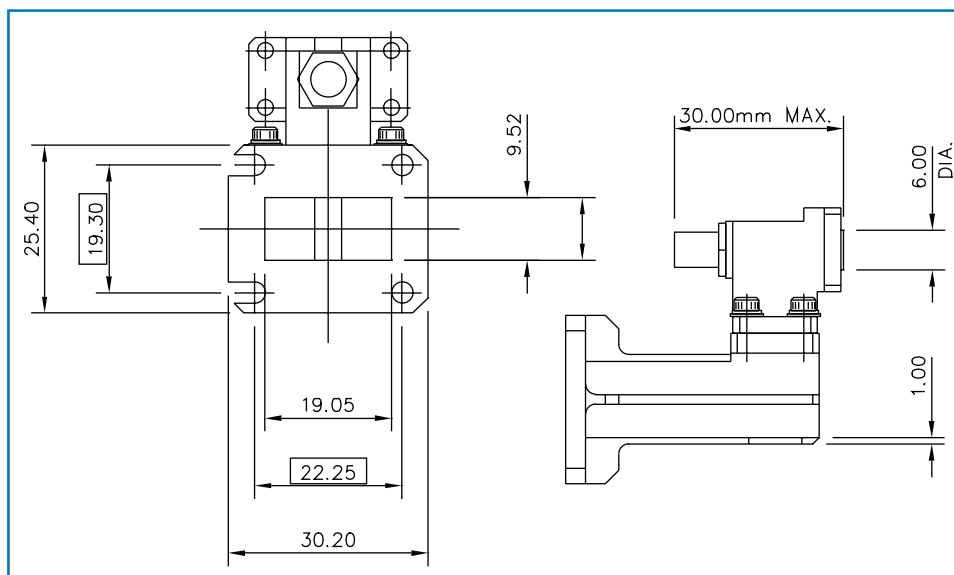

TRAK Microwave Limited
Dunsinane Avenue, Dundee, Scotland DD2 3QF
Phone: +44 (0)1382 833 411 ♦ Fax: +44 (0)1382 833 599
E-mail: trakeurope@trak.com ♦ www.trak.com

