

D Series



12 Volt Input Dc to Ac Inverter

D12M60J

The D12M60J is a generic dc to ac inverter designed to generate 6 marms into a 350 - 550 volt load (CCFT) from a nominal 12 volt dc source.

FEATURES

- Low Profile
- Display compatible connector
- High efficiency

PHYSICAL SPECIFICATIONS


- Size: .79" x 3.58" x .32"
(without input connector) (20,1mm x 90,9mm x 8mm)
- Weight: 11.4 grams
- Operating Temperature: 0° to +70°C
- Storage Temperature: -20° to +85°C
- Humidity: 95% RH Max

Characteristics	Value	Units	Note(s)
Input Voltage	10.8 - 13.2	Volts dc	
Input Current	.30 typ	Adc	$R_L = 75 \text{ Kohms}$
Minimum No Load Output Voltage	1400	Vrms	$V_{in} = 12.00 \text{ Vdc}$
Frequency	41 typ	Khz	$V_{in} = 12.00 \text{ Vdc}$
Output Current	6.0	marms	$R_L = 75 \text{ Kohms}$
Efficiency	75	%	Typical
The maximum input current (which indicates an overload condition) is 1.0 Adc maximum			

Input Connector: 4 position right angle header
(.025" square, .100" centers)

Output Connector: JST SM02(8.0)B-BHS-1-TB

Inverters specifically designed to match most popular LCD modules are also available. Contact your authorized distributor or ERG direct.

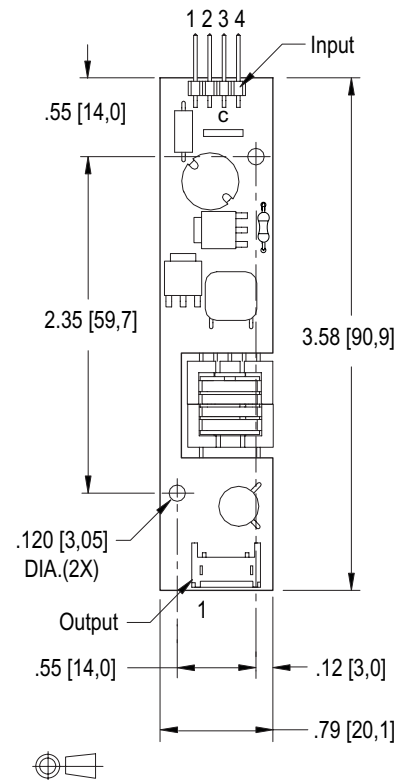

1. $V_{in}(+)$
2. $V_{in}(-)$
3. Control
4. NC



Endicott Research Group, Inc.

2601 Wayne Street Endicott, New York 13760
607-754-9187 fax 607-754-9255
<http://www.ergpower.com>

Connection and Application Information


12 Volt Input Dc to Ac Inverter

D12M60J

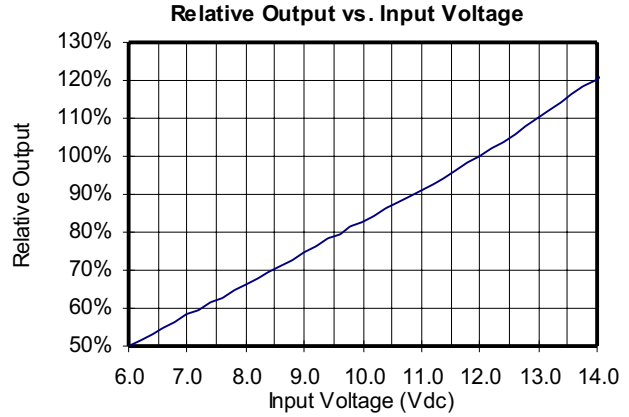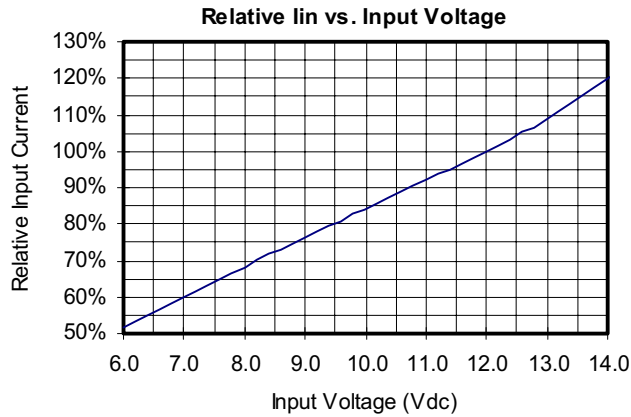

Dimming and Control Options

With "C" jumper removed

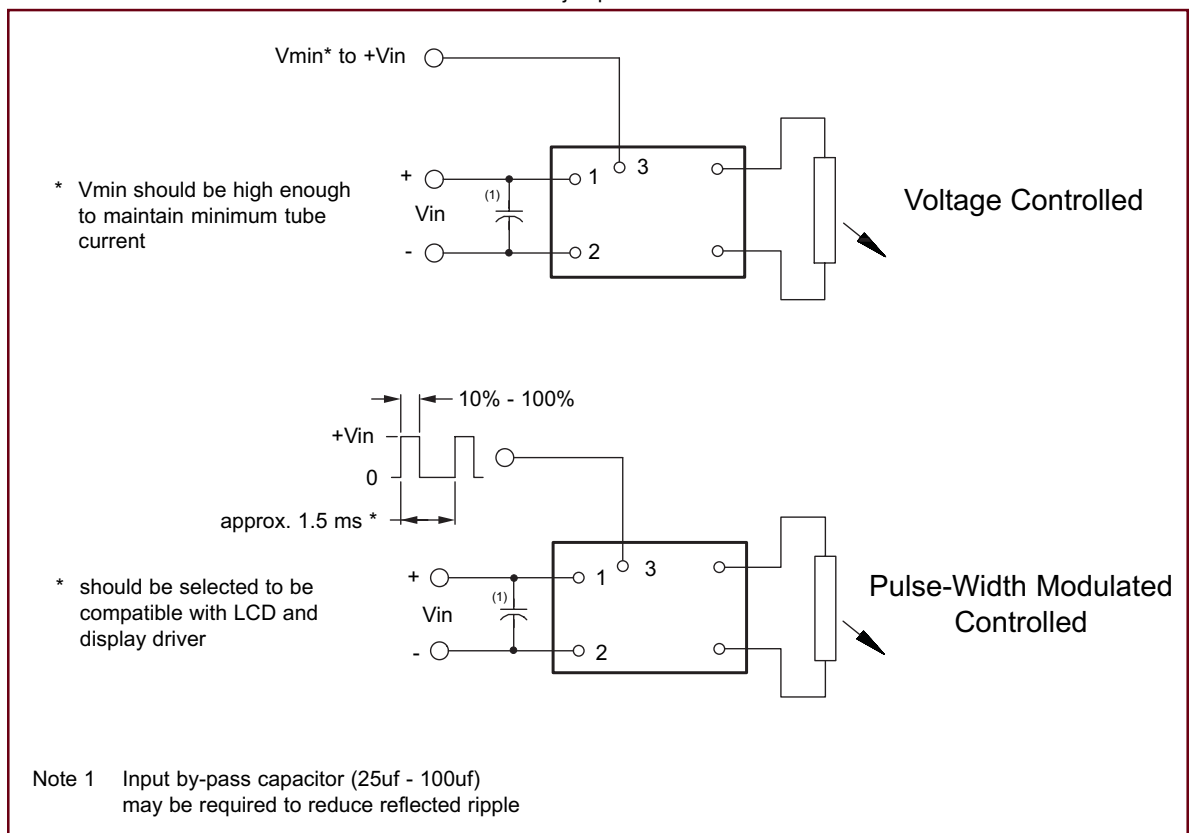

Endicott Research
Group, Inc.

Specifications are subject to change without notice.

12/28/00

D Series