



D Series



12 Volt Input Dc to Ac Inverter

D12P60

The D12P60 is a generic dc to ac inverter designed to generate 6 marms into a 350 - 550 volt load (CCFT) from a nominal 12 volt dc source.

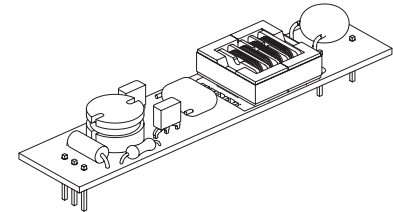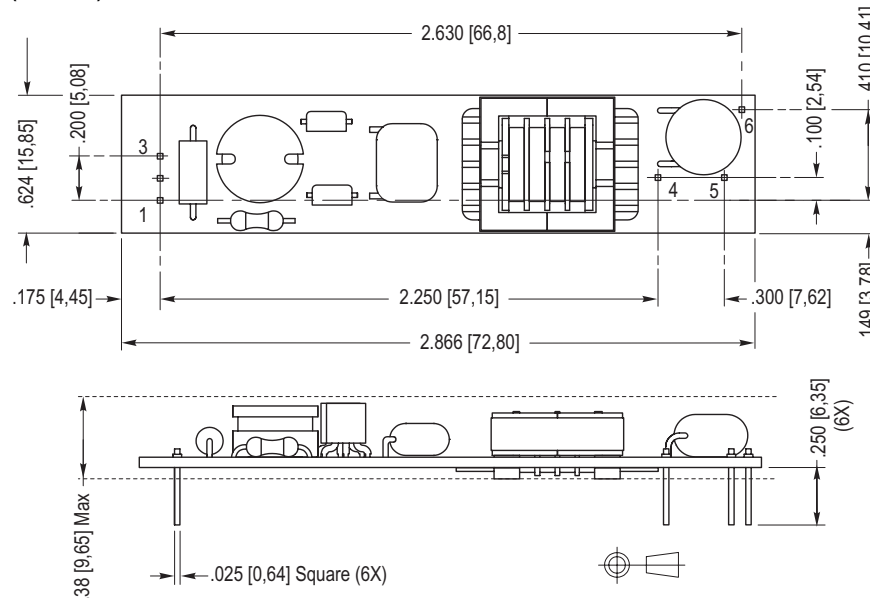

- | | |
|------------|---------|
| 1. -Vin | 4. Vout |
| 2. +Vin | 5. Vout |
| 3. Control | 6. nc |

PHYSICAL SPECIFICATIONS

Size: .62" x 2.87" x .38"
 Weight: 12 grams
 Operating Temperature: 0° to +70°C
 Storage Temperature: -40° to +85°C
 Humidity: 95% RH (Non-Condensing) Max

FEATURES

Low Profile
 PCB Mountable
 High efficiency

Characteristics	Value	Units	Note(s)
Input Voltage	10.8 - 13.2	Volts dc	
Input Current	.30 typ	Adc	$R_L = 75 \text{ Kohms}$
Minimum No Load Output Voltage	1400	Vrms	$V_{in} = 12.00 \text{ Vdc}$
Frequency	40 typ	Khz	$V_{in} = 12.00 \text{ Vdc}$
Output Current	6.0	marms	$R_L = 75 \text{ Kohms}$
Efficiency	75	%	Typical
The maximum input current (which indicates an overload condition) is 1.0 Adc maximum			

Endicott Research Group, Inc.



2601 Wayne Street Endicott, New York 13760
 607-754-9187 fax 607-754-9255
<http://www.ergpower.com>

Inverters specifically designed to match most popular LCD modules are also available. Contact your authorized distributor or ERG direct.


Connection and Application Information

12 Volt Input Dc to Ac Inverter

D12P60

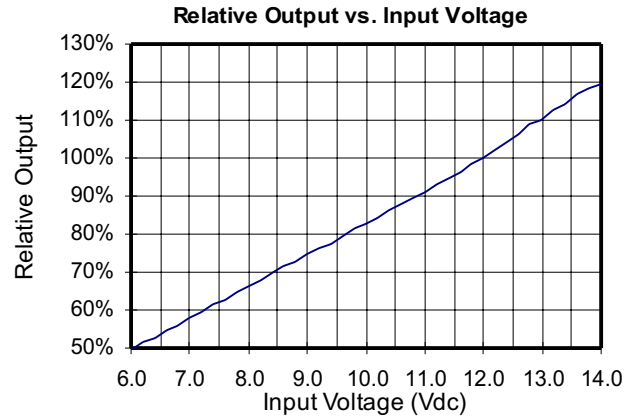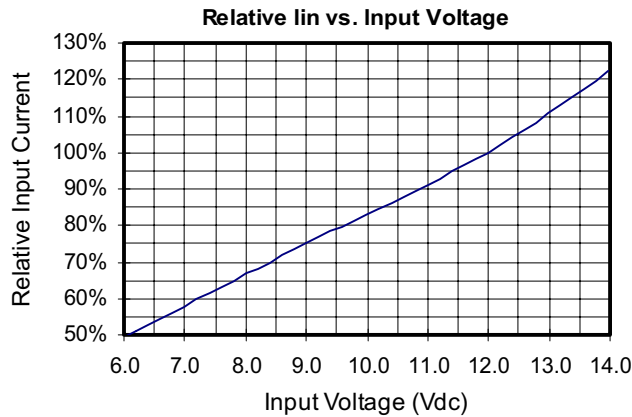

Dimming Option

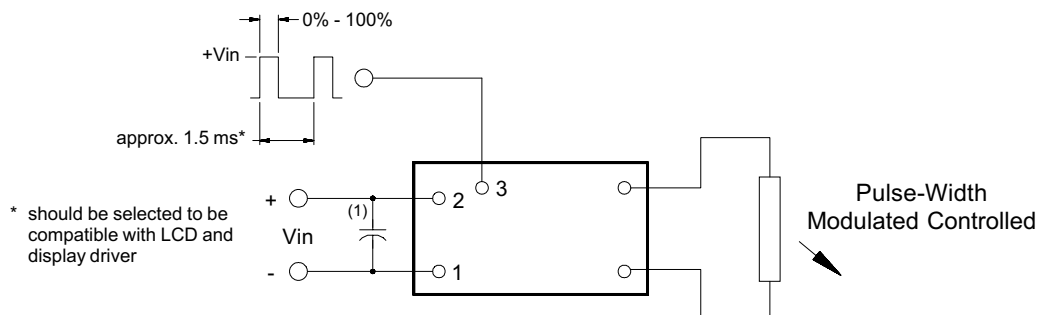

Note 1 Input by-pass capacitor (25 uf - 100uf) may be required to reduce reflected ripple.

Note 2 Full brightness with no control requires that pin 3 be tied to pin 2.



Endicott Research
Group, Inc.

Specifications are subject to change without notice.

11/03/00

D Series