



Endicott Research Group, Inc.

2601 Wayne St., Endicott NY 13760

607-754-9187 Fax 607-754-9255

<http://www.ergpower.com>

DMA22514

Specifications and Applications Information


03/12/01

Preliminary

Two Tube DC to AC Inverter

The ERG DMA22514 (DMA Series) DC to AC inverter features onboard connectors and can be easily dimmed using an external pulse-width modulated control signal. This unit is less than 13mm in height and the two mounting holes makes installation very straight forward.

Powered by a regulated 12 volt DC source the DMA22514 is specially designed to power the Sharp LQ121S1DG31 backlights.

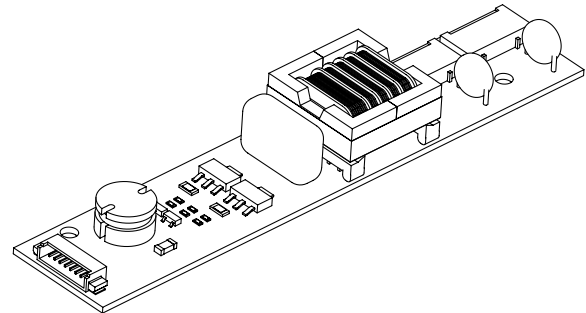

DMA Package

Product Features

- ✓ Small Package Size, less than 13mm in height.
- ✓ High Efficiency
- ✓ Made in U.S.A.

Connectors

J1 - (Input)
MOLEX
532-61-0890

J2,J3 - (Outputs)
JST
SM02(8.0)B-BHS-1-TB


Pinouts

J1-1 V_{in}
J1-2 V_{in}
J1-3 GND
J1-4 GND
J1-5 Enable
J1-6 N/C
J1-7 N/C
J1-8 N/C

J2-1 AC_{out}
J2-2 AC_{com}

J3-1 AC_{out}
J3-2 AC_{com}

Package Configuration

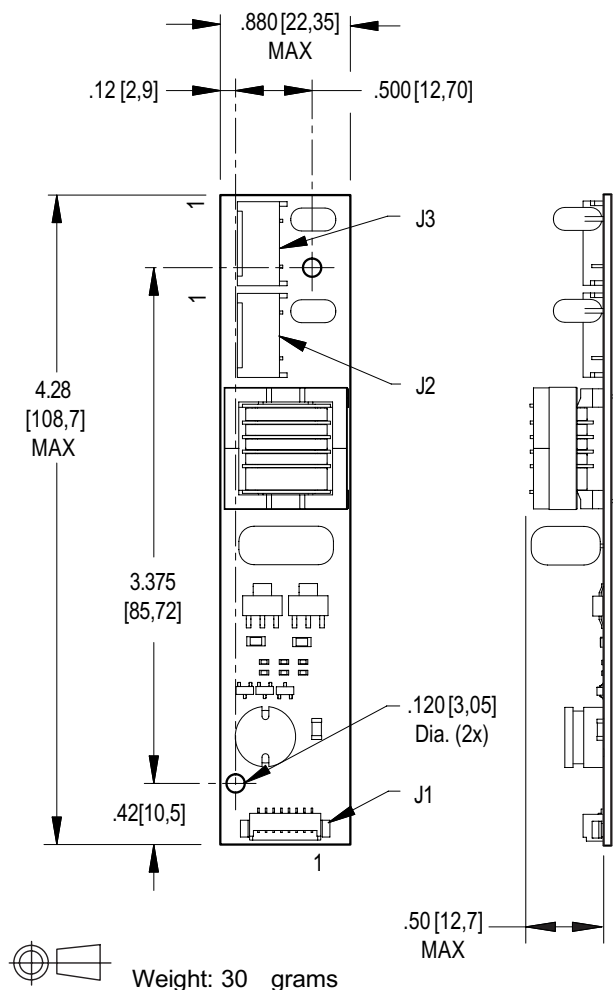

PCB components are shown for reference only. Actual product may differ from that shown.



Absolute Maximum Ratings ^(Note 1)

Rating	Symbol	Value	Units
Input Voltage	V_{in}	-0.3 to +15	V_{DC}
Enable	V_{Enable}	-0.3 to +15	V_{DC}
Operating Temperature	T_a	0 to +85	°C
Storage Temperature	T_s	-40 to +85	°C

Recommended Operating Conditions

Rating	Symbol	Value	Units
Input Voltage	V_{in}	10.8 to 13.2	V_{DC}
Operating Temperature ^(Note 2)	T_a	0 to +50	°C

Electrical Characteristics

Unless otherwise noted $V_{in} = 12.00$ Volts DC , $T_a = 25$ °C and unit has been running for 15 minutes.

Characteristic	Symbol	Min	Typ	Max	Units
Inverter					
Input Current	I_{in}	-	0.590	0.700	A_{DC}
Input Ripple Current	I_{rip}	-	-	-	mA _{pk-pk}
Operating Frequency	F_o	32	37	42	KHz
Efficiency	η	-	90	-	%
Output Voltage (no load) ^(Note 3)	V_{start}	1500	-	-	V
Output Voltage (with lamp)	V_{out}	-	550	-	V
Output Current (per tube)	I_{out}	-	6.0	-	mArms
Enable (pin J1-5)					
Turn-Off Threshold	V_{thoff}	-	-	0.7	V
Turn-On Threshold	V_{thon}	2.0	-	-	V

(Note 1) Reliable and predictable operation of the device are not guaranteed with applied stresses at or beyond those listed in "Absolute Maximum Ratings". Operation at these limits may reduce device reliability and is therefore not recommended. Please refer to "Recommended Operating Conditions" for reliable operation of the device.

(Note 2) Operation above 50°C is possible if airflow is provided.

(Note 3) Provided data is not tested but guaranteed by design.