

1 AMP MINIATURE BRIDGE RECTIFIERS

FEATURES

- PRV Ratings from 50 to 1000 Volts
- Surge overload rating to 50 Amps peak
- Reliable low cost molded plastic construction
- Ideal for printed circuit board applications






- **UL RECOGNIZED - FILE #E124962**

MECHANICAL DATA

- Case: Molded plastic, U/L Flammability Rating 94V-0
- Terminals: Rectangular pins
- Soldering: Per MIL-STD 202 Method 208 guaranteed
- Polarity: Marked on case
- Mounting Position: Any
- Weight: 0.05 Ounces (1.3 Grams)

MECHANICAL SPECIFICATION

ACTUAL SIZE OF THE DI PACKAGE



Sym	Minimum		Maximum	
	in	mm	in	mm
A	0.290	7.4	0.310	7.9
A1	0.245	6.2	0.255	6.5
B	0.016	0.41	0.020	0.51
B1	0.195	5.0	0.205	5.2
B2	0.300	7.6	0.350	8.9
C	0.355	9.3	0.365	9.3
D	0.125	3.2	0.135	3.4
L	0.155	3.9	0.165	4.3
L1	0.060*	1.5*		

* This dimension is "Typical".


MAXIMUM RATINGS & ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive loads, derate current by 20%.

PARAMETER (TEST CONDITIONS)	SYMBOL	RATINGS								UNITS
Series Number		DI100	DI101	DI102	DI104	DI106	DI108	DI110		
Maximum DC Blocking Voltage	V _{RM}	50	100	200	400	600	800	1000	VOLTS	
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700		
Maximum Peak Recurrent Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000		
Average Forward Rectified Current @ T _A = 40°C	I _O	1								AMPS
Peak Forward Surge Current. Single 60Hz Half-Sine Wave Superimposed on Rated Load (JEDEC Method).	I _{FSM}	50								
Maximum Forward Voltage (Per Diode) at 1 Amp DC	V _{FM}	1.1								VOLTS
Maximum Average DC Reverse Current @ T _A = 25°C	I _{RM}	5.0								μA
At Rated DC Blocking Voltage @ T _A = 100°C		0.5								
Typical Thermal Resistance Junction to Ambient (Note 1)	R _{θJA}	40								°C/W
Junction to Lead (Note 1)	R _{θJL}	15								
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +150								°C

NOTES: (1) Bridge mounted on PC Board with 0.5" sq. (13 mm sq.) copper pads

3.01 058



1 AMP MINIATURE BRIDGE RECTIFIERS

RATING & CHARACTERISTIC CURVES FOR SERIES DI100 - DI110

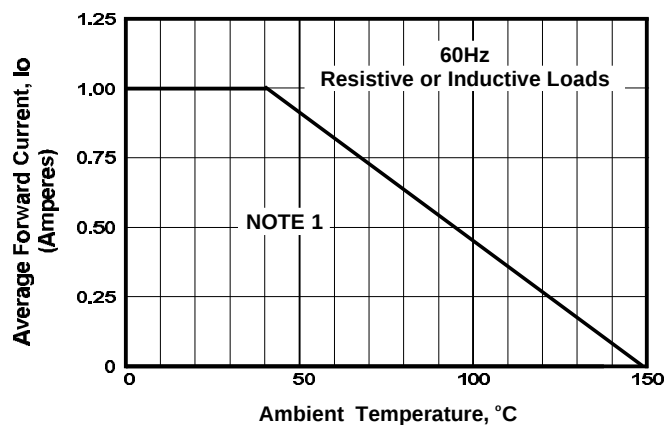


FIGURE 1. FORWARD CURRENT DERATING CURVE

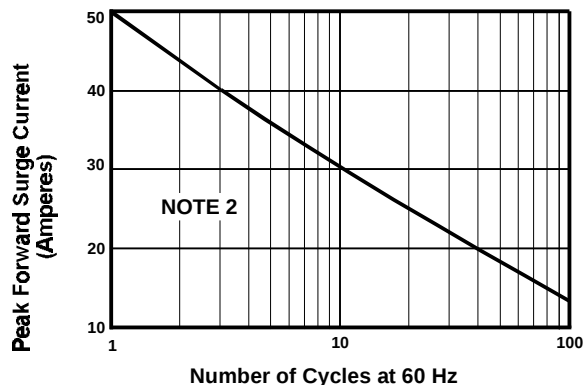


FIGURE 2. MAXIMUM NON-REPETITIVE SURGE CURRENT

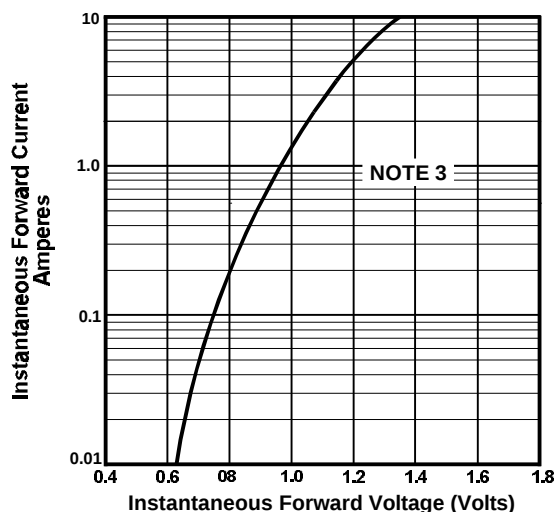


FIGURE 3. TYPICAL FORWARD CHARACTERISTIC PER DIODE

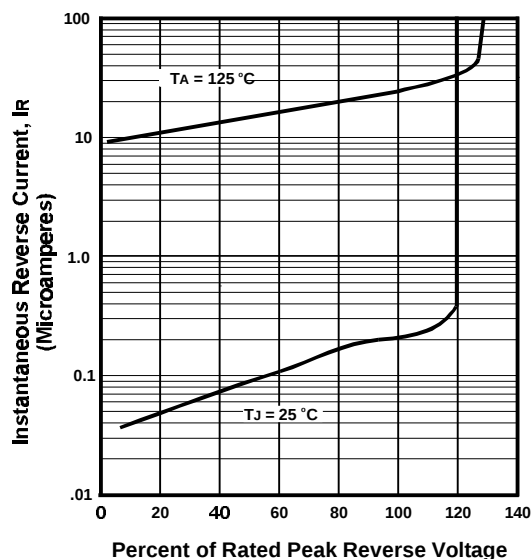


FIGURE 4. TYPICAL REVERSE CHARACTERISTICS

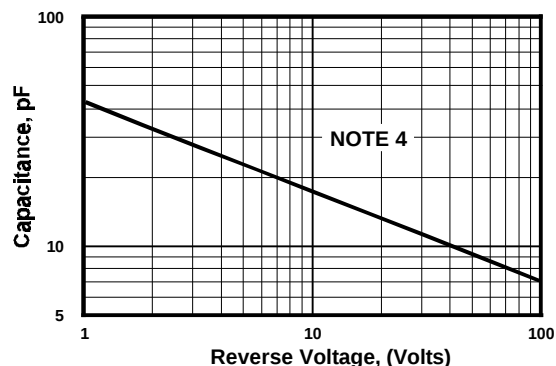


FIGURE 5. TYPICAL JUNCTION CAPACITANCE PER DIODE

NOTES

- (1) Mounted on PC Board With 0.5" Sq. (13 mm Sq.) Copper Pads And Bridge Lead Length of 0.06" (1.5 mm)
- (2) $T_J = 150^\circ\text{C}$
- (3) $T_J = 25^\circ\text{C}$; Pulse Width = 300 μSec , 1% Duty Cycle
- (4) $T_J = 25^\circ\text{C}$; $f = 1\text{ MHz}$; $V_{\text{sig}} = 50\text{mVp-p}$