


- Cellular A-Band Filter
- Optimum Selectivity And Rejection Of B-Band TX/RX Signals
- Dielectric Resonators
- Rugged Design For Reliability
- Fits Within 4U Rack Space
- Solid Aluminum Housing Base With Silver Plating

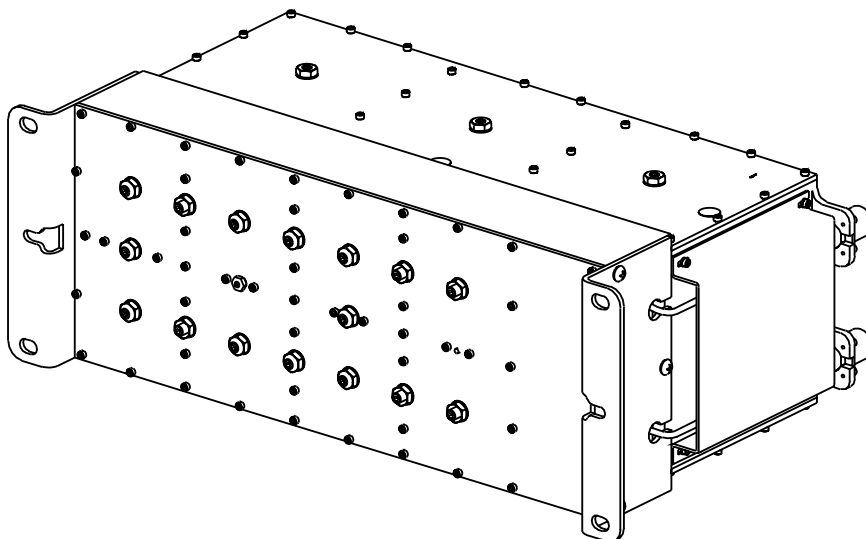

Electrical			Mechanical	
Frequency:	RX	824-835 MHz and 845-846.5 MHz	Temp Range:	-30° to +60° C
Insertion Loss:	RX	≤ 1.9 dB	Connectors:	N-Female (Input / Output)
Attenuation: (min.)		≤ 821.0 MHz: 35 dB 837-844.2 MHz: 35 dB ≥ 847.3 MHz: 40 dB	Finish:	Decibel Tek Black
Return Loss:	RX	≥ 14 dB	Size (L x W x H):	17-7/8 x 9-1/2 x 6-5/16" (454 x 241 x 160 mm)
			Weight:	22.5 lbs (10.2 kg)
Mounting Options			Shipping Information	
Standard:	Mounts to Tray or Panel.		Packing Size:	TBD
Optional:	19" Rack Kit.		Shipping Weight:	30 lbs (13.6 kg)

8635 Stemmons Freeway • Dallas, Texas U.S.A. 75247-3701
Dallas/Ft.Worth Area Tel: 214.631.0310 • Fax: 214.631.4706
Toll Free Tel: 1.800.676.5342 • Fax: 1.800.229.4706

www.decibelproducts.com

customerservice@decibelproducts.com

- Cellular A-Band Filter
- Optimum Selectivity And Rejection Of B-Band TX/RX Signals
- Dielectric Resonators

- Rugged Design For Reliability
- Fits Within 4U Rack Space
- Solid Aluminum Housing Base With Silver Plating

