


- Cellular B-Band Filter
- Optimum Selectivity And Rejection Of A-Band TX/RX Signals
- Dielectric Resonators

- Rugged Design For Reliability
- Fits Within 4U Rack Space
- Solid Aluminum Housing Base With Silver Plating

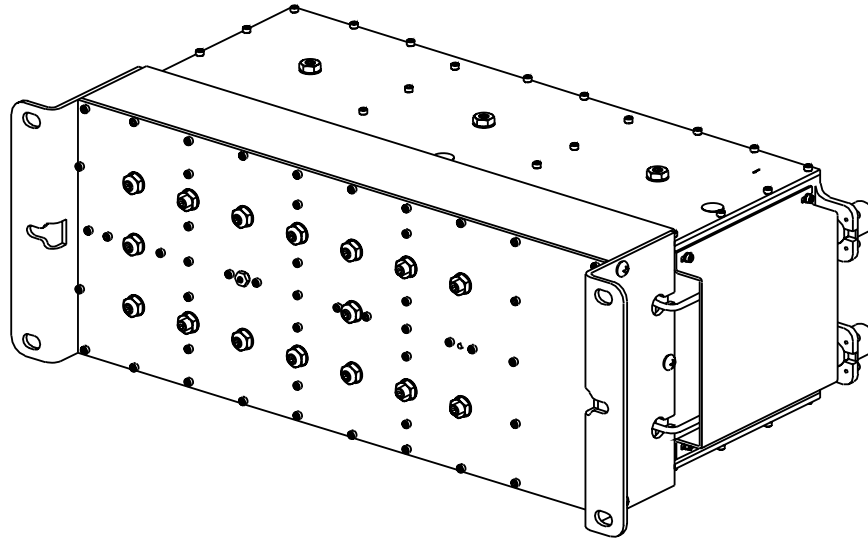

Electrical			Mechanical	
Frequency:	RX	835-845 MHz and 846.5-849 MHz	Temp Range:	-30° to +60° C
Insertion Loss:	RX	≤ 1.95 dB	Connectors:	N-Female (Input / Output)
Attenuation: (min.)		≤ 833.0 MHz: 35 dB 845.25-846.25 MHz: 20 dB ≥ 851.0 MHz: 35 dB 880-894 MHz: 78 dB 900-2000 MHz: 80 dB	Finish:	Decibel Tek Black
Return Loss:	RX	≥ 14 dB	Size (L x W x H):	17-7/8" x 9-1/2" x 6-5/16" (454 x 241 x 160 mm)
			Weight:	22.5 lbs (10.2 kg)
Mounting Options			Shipping Information	
Standard:	Mounts to Tray or Panel.		Packing Size:	TBD
Optional:	19" Rack Kit.		Shipping Weight:	30 lbs (13.6 kg)

- Cellular B-Band Filter
- Optimum Selectivity And Rejection Of A-Band TX/RX Signals
- Dielectric Resonators

- Rugged Design For Reliability
- Fits Within 4U Rack Space
- Solid Aluminum Housing Base With Silver Plating

