

Ceramic Singlelayer Feed-Through Filters 400V_{DC}

DESIGN :

π -type feed-through filter, threaded type

RATED VOLTAGE U_R :

400V_{DC} (280 Vrms)

DIELECTRIC STRENGTH BETWEEN LEADS:

1250 V_{DC} 1s

DISSIPATION FACTOR tan δ :

$\leq 25 \cdot 10^{-3}$

INSULATION RESISTANCE R_{is} :

$\geq 5 \cdot 10^9 \Omega$

CATEGORY TEMPERATURE RANGE ϑ_A :

(- 25 to + 85)°C

CLIMATIC TESTING CLASS ACC. TO EN 60068-1 :

40 / 085 / 21

PERMISSIBLE REACTIVE POWER :

10.8VAr

PERMISSIBLE POWER LOSS :

270mW

DIRECT CURRENT I_{DC} :

10A

MARKING :

None


MAXIMUM PERMISSIBLE TORQUE

0.8 Nm (clearance hole mounting)


0.5 Nm (threaded hole mounting)

MOUNTING HARDWARE :

A threaded nut (8.0 HEX) is supplied in bulk

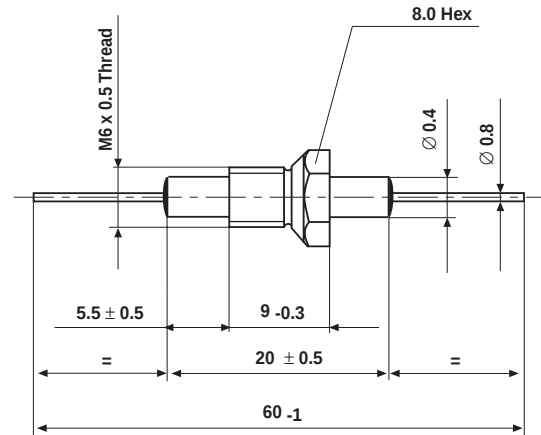

• Dimensions in mm

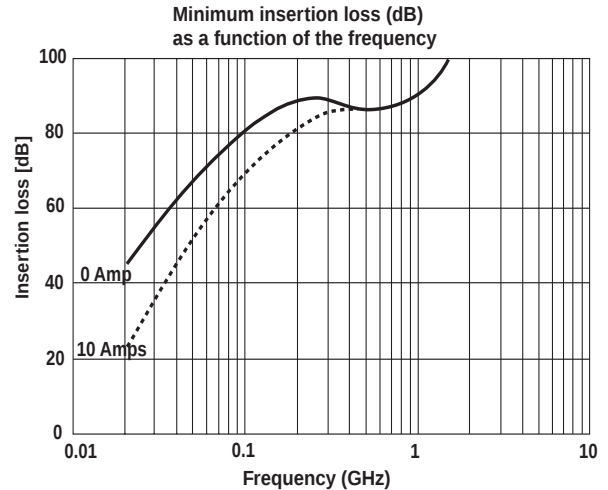

CLASS	CERAMIC DIELECTRIC	CAPACITANCE VALUE (pF)	TOLERANCE
2	R 3000	7000	- 20 + 30 %

ORDERING INFORMATION

DDML 0420	400V _{DC}	7000pF	- 20 + 30 %	R 3000
-----------	--------------------	--------	-------------	--------