

D10009
SD10009

DSL Isolation Transformer

FEATURES


- For top-performance in ADSL modem line interfaces.
- Drop in replacement for EP13
- Total Harmonic Distortion rated -87.5dB, typ. between 30kHz-200kHz.
- Insertion Loss rated 0.36dB typ. @ 300kHz.
- Return Loss rated 18.9dB typ. @ 300kHz.
- Longitudinal Balance 69.6dB typ. between 30kHz-1.1 MHz.
- Complies with supplementary insulation for a 250 Vrms primary line circuit according to IEC60950.
- Lower profile (10.9 mm).
- Applicable for IC models:
ALCATEL:
MKT-20130/131/134/140/141/150/160/165/450
AMD : AMDSK134

PRODUCT COMPLIANCE


- UL/C- UL recognized file number:
- BABT certificate of recognition:
- Patent Pending

NOMENCLATURE (FIG. 1)

THT

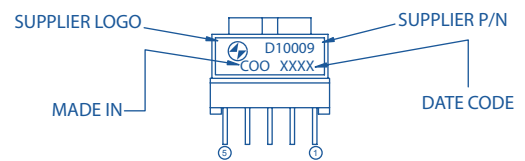


SMT

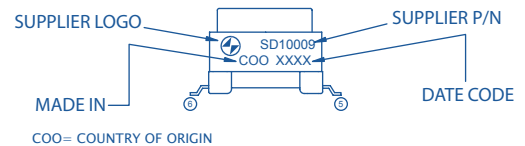


MECHANICAL DIMENSIONS (FIG. 2)

D10009

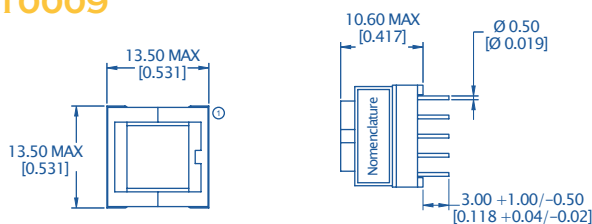


SD10009

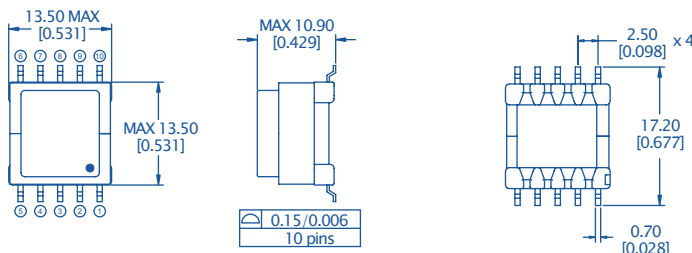


DIMENSIONS: $\frac{\text{mm}}{\text{inches}}$


TERMINAL LAND LAYOUT



RECOMMENDED LAND LAYOUT:

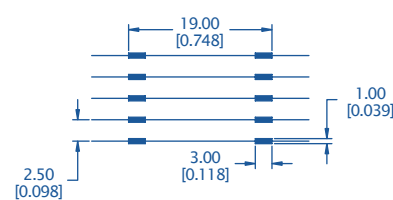

TERMINAL (BOTTOM VIEW)



Literature number: D10009 & SD10009 ©Copyright 2001, Sumida Corporation All rights reserved. Printed in U.S.A. 9/01

www.sumida.com

• North America

Tel. 1 847 545 6700
Fax. 1 847 545 6720

• Hong Kong

Tel. 852 2880 6688
Fax. 852 2565 9600

• Europe

Tel. 32 89 328850
Fax. 32 11 300890

• Singapore

Tel. 65 296 3388
Fax. 65 296 3390

• Taiwan

Tel. 886 2 2523 6368
Fax. 886 2 2523 6369

• Japan

Tel. 813 3980 2212
Fax. 813 3980 2213

DSL Isolation Transformer


ELECTRICAL PERFORMANCE SPECIFICATIONS

Performance	Conditions	Min	Typ	Max	Units
Impedance	Reflected on Primary with load on Secondary		100 25		Ω
Total Harmonic Distortion	5.3 Vrms, 30kHz–100kHz		–87.51	–80	dB
Insertion Loss	@ 300 kHz		0.36	0.5	dB
Return Loss	@ 300 kHz	14.5	18.9		dB
Dielectric Breakdown Isolation Production methods applied:	Safety Standard tested 1 min. HiPOT Voltage Duration Trip Leakage Current	1500 1875 2		200	Vrms Vrms Sec μ A
Frequency Response	30 kHz –1.1MHz (Ref. 300kHz)		± 1.7	± 2.0	dB
Longitudinal Balance	30 kHz –1.1MHz	55	69.6		dB
DC Resistance @ 20°C	Primary winding (R_{pri}) Secondary winding (R_{sec})		2.7 1.4	3.0 1.5	Ω
DC current in Primary			0		mADC
Turns Ratio	Primary to secondary; $\pm 2\%$		2:1		Turns
Inductance (L_p)	10 kHz, 0.1 VAC	383.0	409.5	432.0	μ H
Leakage inductance (ΔL_{leak})	100 kHz, 0.1 VAC		4.3	9.0	μ H
Core Loss (R_p)	100 kHz, 0.1 VAC		18.9		k Ω
Interwinding Capacitance (C_{ww})	10 kHz, 0.1 VAC		18.5	26	pF
Operating temperature		–40		85	°C
Storage temperature		–40		100	°C

Electrical Performance Specifications (TA = 25°C unless otherwise specified)

- Spice model Schematic is available on the Sumida America Web site in application note AN1002.
- GRAPHS AVAILABLE UPON REQUEST

PACKAGING

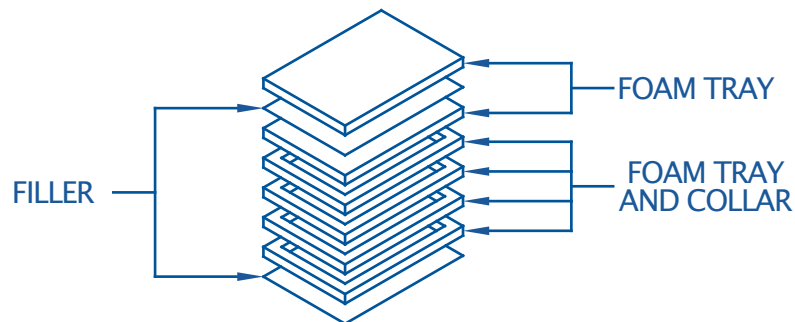

PACKAGING

Material	Contents	#Transformers
Tray	Transformer	50