

OC-1 Single Mode Transceiver with Clock Recovery



Features

- ☑ Full Compliance with OC-1 SONET Specifications
- ☑ Long Reach 1310 nm & 1550 nm and Intermediate Reach
- ☑ Eye Safe (Class I Laser Safety)
- ☑ Multi-sourced 2x9 package style
- ☑ Duplex SC or ST or FC connector
- ☑ - 40°C to +85°C Operating Temperature (option "A")
- ☑ Single +5 V supply & DATA & CLOCK PECL interface
- ☑ Wave Solder Process Compatible

Description

The DTC-01 fiber optic transceivers with clock recovery offer a simple, convenient way to interface ATM/SONET/SDH OC-1 PCBs to single mode fiber optic cables. Both Long Reach (1300 nm or 1550 nm) and Intermediate Reach versions are available using either DFB Lasers or Fabry Perot Lasers where appropriate. All modules satisfy Class I Laser Safety requirements in accordance with the US FDA/CDRH and international IEC-825 standards.

The transmit and receive functions are contained in a two-row, 18-pin (2x9) package with a Duplex SC or ST or FC connector interface. The transmitter includes the laser driving circuitry as well as an Average Power Control (APC) loop to stabilize the transmitter average optical output power. A Transmitter Disable input, a Laser Back Facet Monitor and differential Laser Bias Monitor outputs and a Transmitter Alarm output are provided. The receiver features a high performance

InGaAs PIN photodiode and a transimpedance amplifier IC with internal AGC for wide dynamic range. A PLL clock recovery IC is used to generate PECL data and clock. A Signal Detect status TTL output is also included.

The transceiver operates from a single +5V supply over an operating temperature range of 0°C to +70°C ("B" option) or -40°C to +85°C ("A" option). The package is made of either *conductive* plastic with blue color (Duplex-SC version) or metal (FC and ST version) for excellent EMI shielding.

Related OC-1 transceivers

DTR-052-SM: 1x9 Transceiver without Clock Recovery, 5 V supply
DTR-052-SM2: 2x9 Transceiver without Clock Recovery, 5 V supply
DTR-052-3.3-SM: 1x9 Transceiver without Clock Recovery, 3.3 V
DTR-052-3.3-SM2: 2x9 Transceiver without Clock Recovery, 3.3 V

Absolute Maximum Ratings

Parameter		Symbol	Minimum	Maximum	Units
Storage Temperature		T_{st}	- 40	+ 85	°C
Operating Temperature	"A" option	T_{op}	- 40	+ 85	°C
	"B" option		0	+ 70	
Supply Voltage		V_{CC}	0	+ 6.0	V
Input Voltage		V_{in}	0	V_{CC}	V
Output Current		I_O	-	50	mA
Lead Soldering Temperature & Time		-	-	260°C, 10 sec	

DTC-01

Transmitter Performance Characteristics (over Operating Case Temperature Range)

Parameter		Symbol	Minimum	Typical	Maximum	Units
Data Rate		B	51	51.84	52	Mb/s
Average Optical Output Power (coupled into single mode fiber), 50% duty cycle	L0	P_o	- 5.0	- 3.0	0	dBm
	L1		- 8.0	- 5.0	- 2.0	
	L2		- 12.0	- 8.0	- 5.0	
	L3		- 15.0	- 11.0	- 8.0	
Extinction Ratio		P_{hi}/P_{lo}	10	-	-	dB
Center Wavelength	IR (Intermediate Reach)	λ_c	1261	1310	1360	nm
	LR1 (Long Reach 1310 nm)		1280	1310	1335	
	LR2 (Long Reach 1550 nm)		1480	1550	1580	
Spectral Width (RMS)	LR1 (0°C to 70°C) & IR	$\Delta\lambda_{RMS}$	-	-	4	nm
Spectral Width (-20 dB)	LR1 (-40°C to 85°C) & LR2	$\Delta\lambda_{20}$	-	-	1	
Optical Rise and Fall Time (10% to 90%)		t_r, t_f	-	2	4	ns
Optical Output Eye		compliant with Bellcore TR-NWT-000253				

Receiver Performance Characteristics (over Operating Case Temperature Range)

Parameter		Symbol	Minimum	Typical	Maximum	Units
Data Rate		B	51	51.84	52	Mb/s
Optical Input Power (10^{-10} BER) ¹		P_{in}	- 36.0	- 40.0	- 7.0	dBm
Signal Detect Thresholds	Increasing Light Input	P_{sd+}	-	-	- 36.0	dBm
	Decreasing Light Input	P_{sd-}	- 45.0	-	-	dBm
Signal Detect Hysteresis			-	0.5	-	dB
Wavelength of Operation		λ	1100	-	1600	nm
Output Clock Jitter		CLK_J	-	-	0.1	UIrms
Jitter Bandwidth		BW_J	-	40	52	kHz
Maximum Jitter Amplification		A_J	-	-	0.1	dB
¹ The receiver optical input power (sensitivity) is specified and measured at 1300 nm wavelength with 2^{23} -1 PRBS.						

Transmitter Electrical Interface (over Operating Case Temperature Range)

Parameter		Symbol	Minimum	Typical	Maximum	Units
Input HIGH Voltage		V_{IH}	$V_{CC} - 1.165$	-	$V_{CC} - 0.700$	V
Input LOW Voltage		V_{IL}	$V_{CC} - 1.890$	-	$V_{CC} - 1.475$	V
Data Input Current - HIGH		I_H	-	-	350	μA
Data Input Current - LOW		I_L	-	-	250	μA
Transmitter Disable Voltage		V_{DIS}	$V_{CC} - 2.0$	-	V_{CC}	V
Transmitter Enable Voltage		V_{EN}	0	-	0.8	V
Transmitter End-of-Life Alarm	Normal Operation	V_{NO}	0	-	0.8	V
	End-of-Life	V_{EOL}	$V_{CC} - 0.5$	-	V_{CC}	V
Differential Bias Monitor Voltage ($T_a = 25^\circ C$)		$V_{BM+} - V_{BM-}$	0.02	-	0.12	V
Back Facet Monitor Voltage ($T_a = 25^\circ C$) ¹		V_{FM}	0.4	-	2.8	V
¹ For manufacturing purposes						

Receiver Electrical Interface (over Operating Case Temperature Range)

Parameter	Symbol	Minimum	Typical	Maximum	Units
Output HIGH Voltage (DATA & CLOCK)	V_{OH}	$V_{CC} - 1.200$	-	$V_{CC} - 0.700$	V
Output LOW Voltage (DATA & CLOCK)	V_{OL}	$V_{CC} - 2.000$	-	$V_{CC} - 1.620$	V
Output Current	I_O	-	-	25	mA
SIGNAL DETECT Output HIGH Voltage	V_{OH}	2.7	-	V_{CC}	V
SIGNAL DETECT Output LOW Voltage	V_{OL}	0	-	0.50	V

Electrical Power Supply Characteristics (over Operating Case Temperature Range)

Parameter		Symbol	Minimum	Typical	Maximum	Units
Supply Voltage		V_{CC}	4.75	5.0	5.25	V
Supply Current	TX	I_{CC}	-	100	130	mA
	RX	I_{CC}	-	200	270	mA

Application Notes

Transmitter: When the DATA+ input is at logic HIGH and DATA- input is at logic LOW, the LD is ON; and vice versa. In single-ended applications, the unused input pin should be biased to $V_{CC} - 1.29\text{ V}$. The transmitter is normally enabled (i.e. when the TX DISABLE input is not connected). When the TX DISABLE input voltage is higher than $V_{CC} - 2\text{ V}$, the laser is turned off independent of the input data. A Transmitter End-of-Life Alarm (T_{ALM}) is also provided, which will switch to TTL level HIGH when the laser is reaching its End-of-Life.

The transmitter incorporates an Average Power Control (APC) loop to stabilize the transmitter average optical output power against temperature variation. The APC loop always acts to keep the transmitter average optical output power at a constant value (assuming that the transmitter is enabled). Therefore, when the input data is all continuous “zeroes” or all continuous “ones”, the transmitter optical output power is a constant level equal to the nominal average optical output power (not at the “OFF” level or at the “ON” level).

Receiver: Both differential outputs (DATA+ and DATA-, CLOCK+ and CLOCK-) are PECL levels requiring termination (50 ohms to $V_{CC} - 2$ volts or 510 ohms to GND is recommended). For optimum performance, both outputs should be terminated in the same manner, even if only one is used.

The Signal Detect circuit monitors the level of the incoming optical signal and generates a TTL logic LOW signal when insufficient

photocurrent is produced.

Interface circuit: The power supply line should be well-filtered. All 0.1 μF power supply bypass capacitors should be as close to the DTC transceiver module as possible. The two front GND posts should be grounded to Circuit Ground or Chassis Ground.



Laser Safety: All transmitters are Class I Laser products per FDA/CDRH and IEC-825 standards. They must be operated under specified operating conditions.

Optical Communication Products, Inc.


DATE OF MANUFACTURE:

MANUFACTURED IN THE USA
This product complies with
21 CFR 1040.10 and 1040.11

Meets Class I Laser Safety Requirements

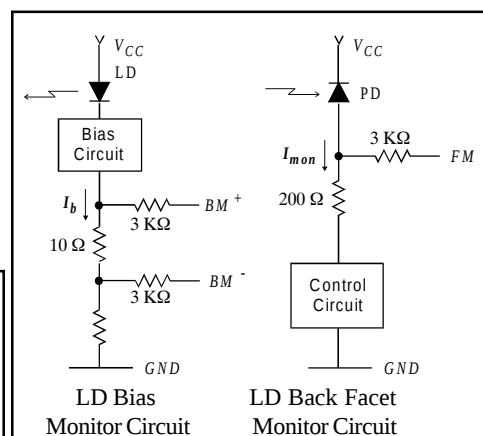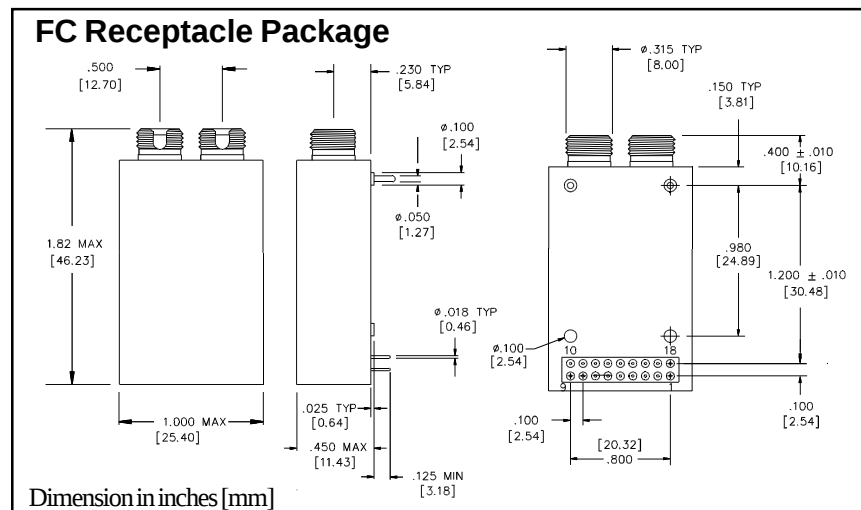


DATA & CLOCK Timing

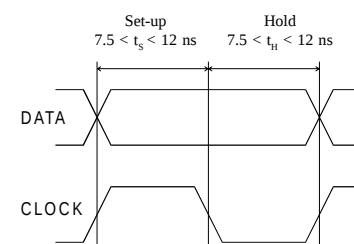


DTC-01

Duplex SC Receptacle Package

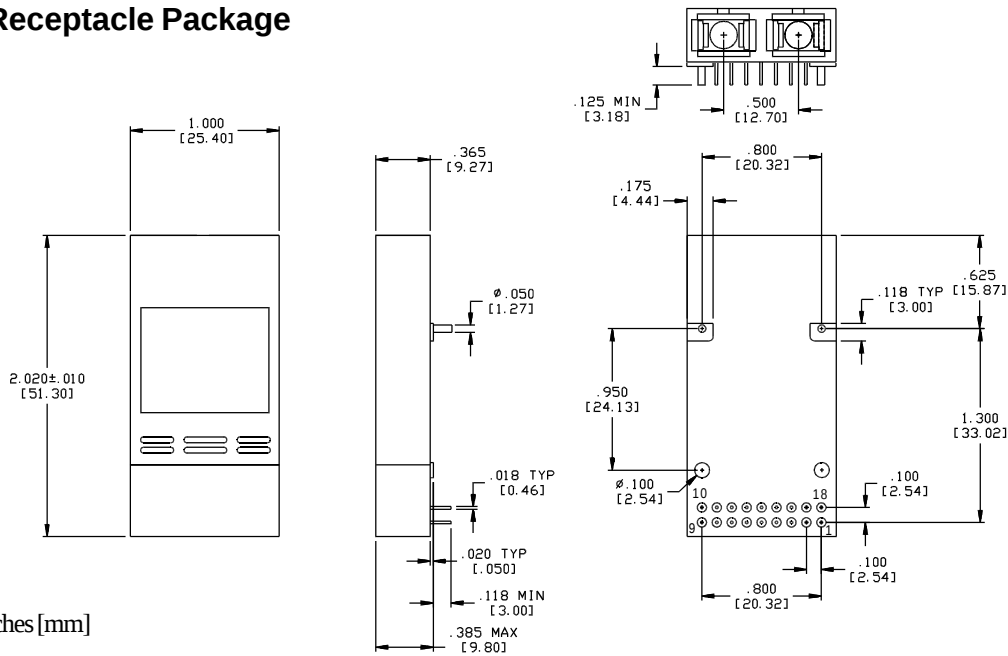

ST Receptacle Package

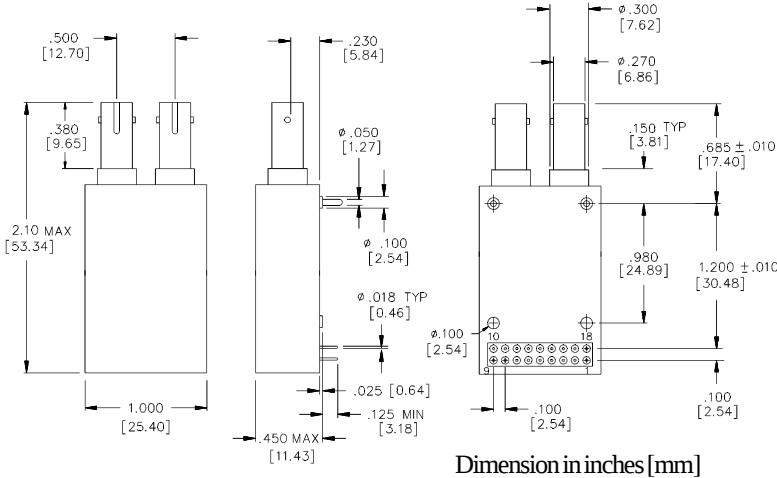

PIN	FUNCTION	PIN	FUNCTION
1	N/C	10	TX GND
2	N/C	11	TD+ (TX DATA IN +)
3	CLOCK -	12	TD- (TX DATA IN -)
4	CLOCK +	13	V _{CC} TX
5	BM- (BIAS MONITOR -)	14	V _{CC} RX
6	BM+ (BIAS MONITOR +)	15	SD (RX SIGNAL DETECT)
7	TX DISABLE	16	RD- (RX DATA OUT -)
8	T _{ALM} (TX ALARM)	17	RD+ (RX DATA OUT +)
9	FACET MONITOR	18	RX GND

Ordering Information

DTC - 01 - XX - T - Ln - DR

Distance Option

specifies the range for Center Wavelength & Spectral Width to be compliant with SONET standard

Blank: Intermediate Reach

LR1 : Long Reach 1310 nm

LR2 : Long Reach 1550 nm

Receptacle

Blank : SC Receptacle

ST : ST Receptacle

FC : FC Receptacle

Temperature Range

A: - 40°C to 85°C

B: 0°C to 70°C

Light Output Option

L0: - 3 dBm (typ.)

L1: - 5 dBm (typ.)

L2: - 8 dBm (typ.)

L3: - 11 dBm (typ.)

NOTES

- For full compliance with OC-1 Intermediate Reach standard, the DTC-01-xx-T-L3 modules are recommended.
- For full compliance with OC-1 Long Reach 1310 nm standard, the DTC-01-xx-A-L0-LR1 and DTC-01-xx-B-L0-LR1 modules are recommended. The DTC-01-xx-A-L0-LR1 uses a DFB laser to satisfy the - 40°C to +85°C requirement for Center Wavelength.
- For full compliance with OC-3/STM-1 Long Reach / L-1.2 standard, the DTC-01-xx-A-L0-LR2 and DTC-01-xx-B-L0-LR2 modules are recommended. Both modules use DFB lasers. However, the DTC-01-xx-A-L0-LR2 is specified only over - 25°C to +70°C.
- The LR1 (- 40°C to +85°C) & LR2 options are available only with DFB lasers and L0 optical output power level.

Optical Communication Products, Inc.

9736 Eton Avenue, Chatsworth, CA 91311, Tel.: 818-701-0164, FAX: 818-701-1468

Optical Communication Products, Inc. reserves the right to make changes in equipment design or specifications without notice. Information supplied by Optical Communication Products, Inc. is believed to be accurate and reliable. However, no responsibility is assumed by Optical Communication Products, Inc. for its use nor for any infringements of third parties which may result from its use. No license is granted by implication or otherwise under any patent right of Optical Communication Products, Inc.

21737-0370, Rev. B

9-10-99

Contents

Description 1
Absolute Maximum Ratings 1
Features 1
Transmitter Performance Characteristics 2
Receiver Performance Characteristics 2
Transmitter Electrical Interface 2
Receiver Electrical Interface..... 3
Electrical Power Supply Characteristics 3
Application Notes 3
FC Receptacle Package 3
DATA & CLOCK Timing 3
ST Receptacle Package 4
Duplex SC Receptacle Package 4
Ordering Information 4