

FUSED FIBER COUPLERS

DUAL WINDOW BROADBAND 1xN COUPLER

DiCon's Dual Window Broadband 1xN Couplers are designed for splitting power signals in the 1550 nm and 1310 nm windows. DiCon's Dual Window Broadband 1xN couplers have excellent uniformity, low excess loss, and low PDL.



FEATURES

- Low insertion loss
- Low PDL
- Low wavelength dependence loss
- Tested to Telecordia GR-1221 (bare fiber version)

APPLICATIONS

DiCon's Dual Window Broadband 1xN Couplers are designed for use in telecommunication equipment, CATV networks, and test equipment.



Specifications subject to change. Copyright ©2001 DiCon Fiberoptics, Inc. All rights reserved.

FUSED FIBER COUPLERS

SPECIFICATIONS¹



Directivity	50 dB min.
Back-reflection	-50 dB max.
Fiber type	9/125 Corning SMF-28
Operating temperature	-40°C to + 70°C
Storage temperature	-40°C to + 85°C

1. All specifications referenced without connectors.

COUPLING RATIO TABLE

	Insertion loss		Uniformity		PDL	
	Premium	Standard	Premium	Standard	Premium	Standard
1x4	7.3	7.7	1.6	2.1	0.2	0.3
1x8	10.8	11.5	2.4	3.1	0.3	0.4
1x16	14.4	15.5	3.2	3.7	0.4	0.5
1x32	18.2	19.5	4.0	4.5	0.5	0.6

HOUSING DIMENSIONS

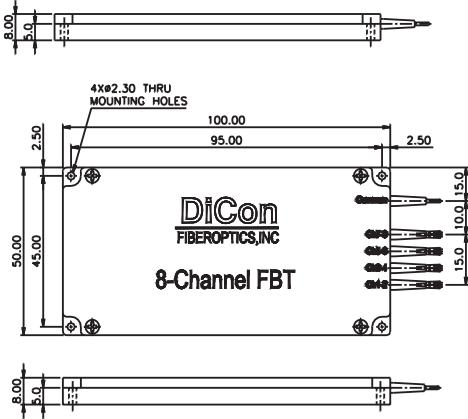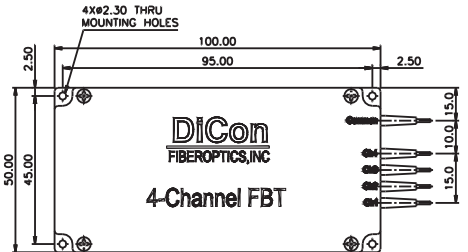

Units: mm

ORDERING INFORMATION

DBTC - [] - [] - [] - [] - [] - []	
Grade	
1	Premium
2	Standard
Passband	
13/15	1270 - 1350 nm & 1510 - 1590 nm
X	Specify value
Port Configuration	
4	1x4
8	1x8
16	1x16
32	1x32
Connector Type	
FC	FC/SPC
FC/APC	FC/APC
FC/UPC	FC/UPC
SC	SC/SPC
SC/APC	SC/APC
SC/UPC	SC/UPC
ST	ST/SPC
ST/UPC	ST/UPC
LC	LC/SPC
LC/UPC	LC/UPC
MU/UPC	MU/UPC
N	None
Fiber Jacket	
2	250 micron, 200 kpsi bare fiber
9L	900 micron, loose tube
Pigtail Length	
1	1 meter
X	Specify X meters