
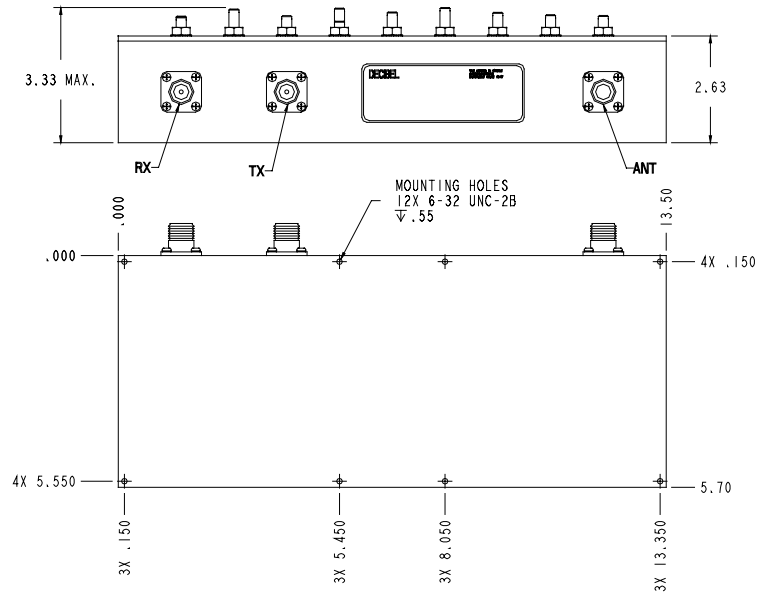


- AMPS B-Band Duplexer
- Superior Intermod Performance
- Nominal Rejection of A-Band TX/RX Signals

- Rugged Design For Reliability
- Fits Within 2U Rack Space
- Solid Aluminum Housing Base
- 600 Watt Input Power Capability

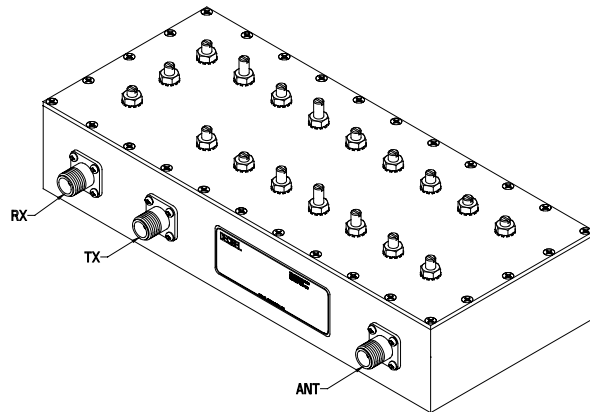

Electrical				Mechanical	
Frequency:	TX	880-894 MHz		Temp Range:	-30° to +60° C
	RX	835-849 MHz		Connectors:	N-Female (Input / Output)
Insertion Loss:	TX	≤ 0.6 dB		Finish:	Decibel Tek Black
	RX	≤ 1.0 dB		Size (L x W x H):	13.5 x 5.7 x 3.45"
Isolation:	TX to RX	≥ 50 dB		Weight:	20 lbs (9.1 kg)
	RX to TX	≥ 80 dB			
Return Loss:	Ant	≥ 20 dB	835-849 and 880-894 MHz		
	RX	≥ 20 dB			
	TX	≥ 20 dB			
Input Power:	600 Watts (Maximum)				
Mounting Options				Shipping Information	
Standard:	Tray Mountable			Packing Size:	TBD
Optional:	Rack Mount Kit			Shipping Weight:	TBD

8635 Stemmons Freeway • Dallas, Texas U.S.A. 75247-3701
Dallas/Ft.Worth Area Tel: 214.631.0310 • Fax: 214.631.4706
Toll Free Tel: 1.800.676.5342 • Fax: 1.800.229.4706

www.decibelproducts.com

customerservice@decibelproducts.com



ISO9001 Compliant

