

- 1 Series name
- 2 Single output
- 3 Output wattage
- 4 Input voltage
F :DC88 - 370V
48 :DC36 - 72V
- 5 Output voltage

TRC Electronics, Inc.

Authorized Stocking Distributor

Tel: 973.779.8282

Fax: 973.779.1490

Contact TRC for pricing,
stock, and technical assistance.

www.trcelectronics.com

MODEL	DAS50F05	DAS50F12	DAS50F24	DAS504805	DAS504812
MAX OUTPUT WATTAGE[W]	50	50.4	50.4	50	50.4
DC OUTPUT	5V 10A	12V 4.2A	24V 2.1A	5V 10A	12V 4.2A

SPECIFICATIONS

	MODEL	DAS50F05	DAS50F12	DAS50F24	DAS504805	DAS504812	
INPUT	VOLTAGE[V]	DC88 - 370			DC36 - 72		
	CURRENT[A]	0.5typ (DCIN 130V, Io=100%) 0.25typ (DCIN 260V, Io=100%)			1.30typ (DCIN 48V, Io=100%)	1.28typ (DCIN 48V, Io=100%)	
	EFFICIENCY[%]	82typ	82typ	82typ	80typ	82typ	
	LEAKAGE CURRENT[ma]	0.3max (By UL, CSA, VDE and DEN-AN)					
OUTPUT	VOLTAGE[V]	5	12	24	5	12	
	CURRENT[A]	10	4.2	2.1	10	4.2	
	LINE REGULATION[mV]	20max	48max	96max	20max	48max	
	LOAD REGULATION[mV]	40max	100max	150max	40max	100max	
	RIPPLE[mVp-p]	0 to +85C ⁺¹	80max	120max	120max	80max	120max
		-10 - 0C ⁺¹	140max	160max	160max	140max	160max
	RIPPLE NOISE[mVp-p]	0 to +85C ⁺¹	150max	200max	200max	150max	200max
		-10 - 0C ⁺¹	190max	230max	230max	190max	230max
	TEMPERATURE REGULATION[mV]	0 to +85C	85max	204max	408max	85max	210max
		-10 to +85C	95max	228max	456max	95max	230max
	DRIFT[mV]	⁺²	20max	48max	96max	20max	48max
	START-UP TIME[ms]	200max (DCIN 88V, Io=100%)			200max (DCIN 36V, Io=100%)		
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	Fixed (TRM pin open) † 10% adjustable by external VR						
OUTPUT VOLTAGE SETTING[V]	4.85 - 5.35	11.4 - 12.6	22.8 - 25.2	4.85 - 5.35	11.4 - 12.6		
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically					
	OVERVOLTAGE PROTECTION	Works at 115 - 140% of rating					
	REMOTE SENSING	Provided					
	REMOTE ON/OFF	Between RC and -side of input:short - 1.2V - - - output ON, 2.4 - 5.5V(or open) - - - output OFF, Compatible TTL					
ISOLATION	INPUT-OUTPUT	AC3.000V 1minute, Cutoff current = 10mA, DC500V 50MW min (At Room Temperature)			AC300V 1minute, Cutoff current = 100mA, DC500V 50MW min (At Room Temperature)		
	INPUT-FG	AC2.000V 1minute, Cutoff current = 10mA, DC500V 50MW min (At Room Temperature)			AC300V 1minute, Cutoff current = 100mA, DC500V 50MW min (At Room Temperature)		
	OUTPUT-FG	AC500V 1minute, Cutoff current = 100mA max, DC500V 50MW min (At Room Temperature)					
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE	-10 to +85C (Aluminum base plate), 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max					
	STORAGE TEMP.,HUMID.AND ALTITUDE	-40 to +85C , 20 - 95%RH (Non condensing), 9,000m (30,000feet) max					
	VIBRATION	10 - 55Hz, 49.0m/s ² (5G), 3minutes period, 60minutes each along X, Y and Z axis					
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis					
SAFETY	AGENCY APPROVALS	UL1950, EN60950, VDE0160, CSA C22.2 No.234 Complies with DEN-AN and IEC60950			Complies with UL1950, CSA C22.2 No.234 and EN60950		
OTHERS	CASE SIZE/WEIGHT	58 X 12.7 X 115mm (W X H X D) / 120g max					
	COOLING METHOD	Conduction cooling (e.g. heat radiation from the aluminum base plate to the attached heat sink)					


*1 Measured by attaching the electrolytic capacitor of 220mF at output.

*2 Drift is the change in DC output for an eight hour period at

ter a half-hour warm-up with the input voltage held constant at the rated input/output.


* Parallel operation with other model is not possible.

External view

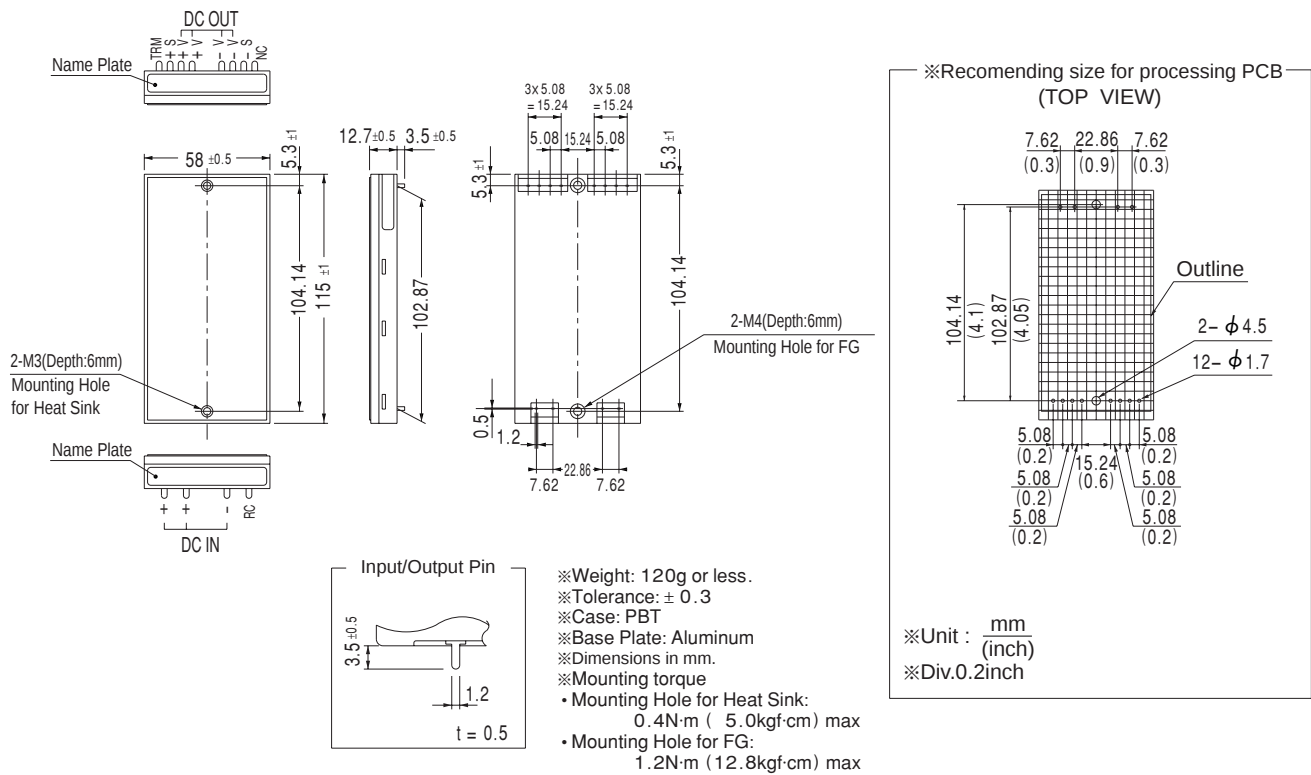


Performance data


■ STATIC CHARACTERISTICS (DAS50F05)

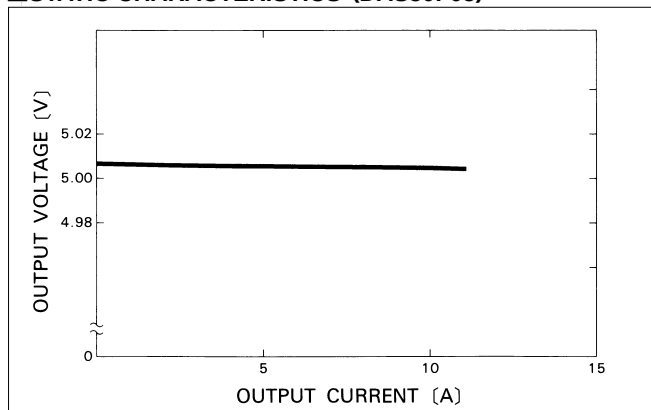

■ RISE TIME & FALL TIME (DAS50F05)

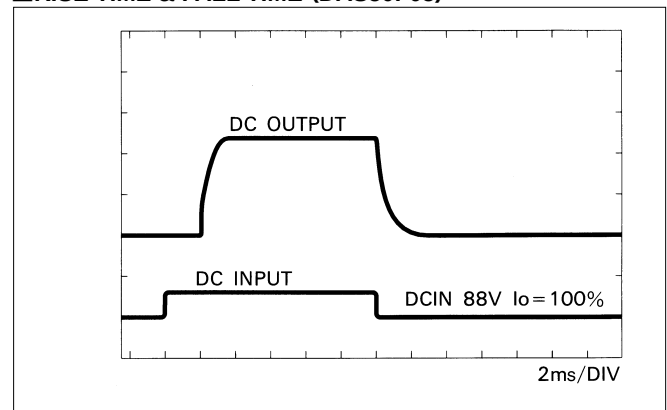

■ OVERCURRENT CHARACTERISTICS (DAS50F05)

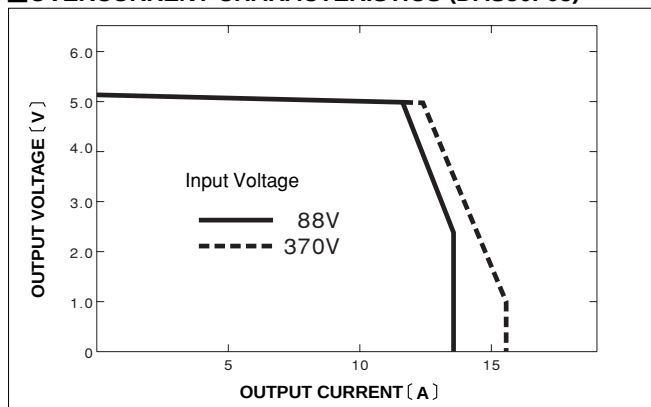

■ DERATING CURVE

