

High Performance Tap Coupler

DC202-155



Applications

- Monitoring Optical Amplifier and other modules in DWDM systems

Description

- Small insertion loss fluctuation
- Low wavelength dependent loss
- Low polarization dependent loss
- Low temperature dependent loss
- Loose tube pigtails available


Specifications

Parameter		Specification				
Configuration		1 x 2, 2 x 2				
Operating Wavelength		1530 ~ 1565 nm				
Operating Temperature		-10 ~ +70 °C				
Storage Temperature		-40 ~ +85 °C				
Split Ratio		50:50	90:10	95:5	98:2	99:1
Insertion Loss (dB)	Main port	≤ 3.50	≤ 0.60	≤ 0.37	≤ 0.24	≤ 0.20
	Tap port	≤ 3.50	9.5~10.5	12.5~13.5	16.5~17.5	19.5~20.5
Insertion Loss Flatness (dBp-p)	Main port	≤ 0.15	≤ 0.15	≤ 0.15	≤ 0.15	≤ 0.15
	Tap port	≤ 0.15	≤ 0.20	≤ 0.20	≤ 0.30	≤ 0.30
Polarization Dependent Loss (dBp-p)	Main port	≤ 0.10	≤ 0.10	≤ 0.05	≤ 0.05	≤ 0.05
	Tap port	≤ 0.10	≤ 0.15	≤ 0.15	≤ 0.20	≤ 0.20
Temperature Dependent Loss (dBp-p)	Main port	≤ 0.10				
	Tap port					
Size	φ0.25mm fiber type	2x2type;φ2.9 x L45mm, 1x2type;φ2.9 x L50mm				
	φ0.9mm loose tube type	2x2type;φ2.9 x L55mm, 1x2type;φ2.9 x L55mm				


Specifications do not include connectors

Available for FC-SPC, SC-SPC connectors for each port.

Dimensions

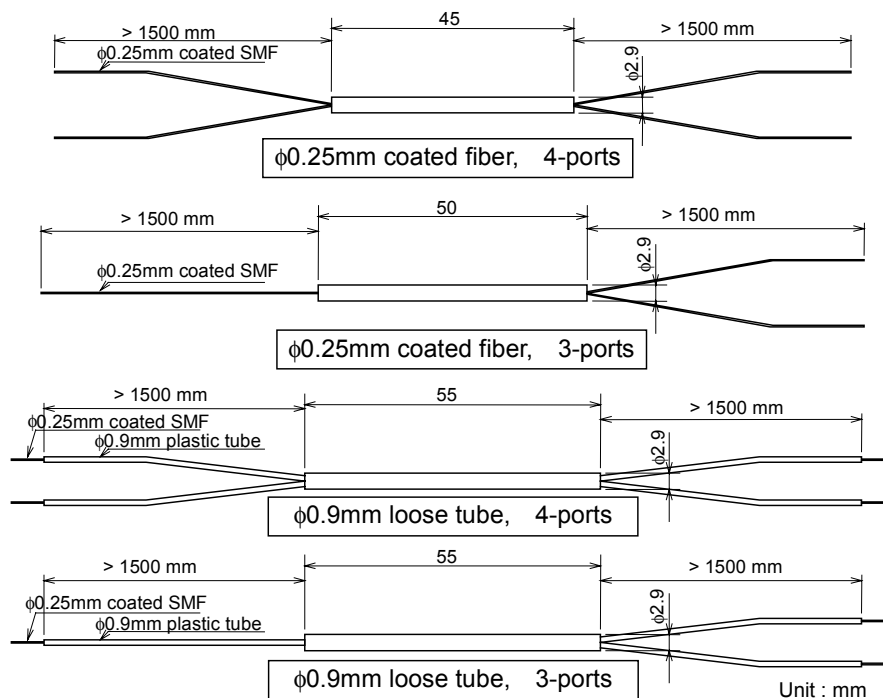

Ordering Information

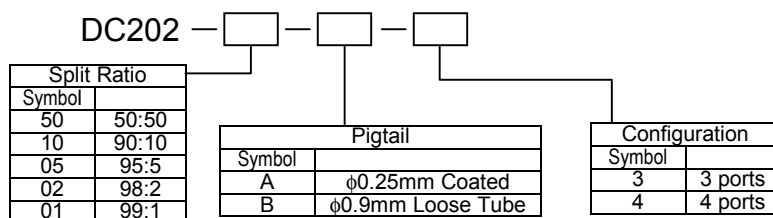

Furukawa Electric Co, Ltd., Fitel Technologies, Inc, and Furukawa Electric Europe, Ltd. reserve the right to change data contained in this document in the interest of continued product improvement. The publication of this information does not imply freedom from patent or any other rights of The Furukawa Electric Company, Ltd. or its affiliated companies.



Headquarters
6-1 Marunouchi 2-chome
Chiyoda-ku Tokyo
100-8322 Japan
T: 81-3-3286-3141
F: 81-3-3286-3515
[**www.furukawa.co.jp**](http://www.furukawa.co.jp)

Furukawa Electric Europe, Ltd
3rd FL Newcombe House
43-45 Notting Hill Gate
London, UK
T: 44-171-221-6000
F: 44-171-313-5310
www.furukawa-fitel.co.uk
sales@furukawa-fitel.co.uk

**Perryville Corporate Park
Perryville III
Clinton, NJ 08809
USA
T: 908-713-3525
F: 908-713-3515
www.fiteltech.com
sales@fiteltech.com**