




Telecommunication

ADSL Transformer

Transformers

DT32-2064AT

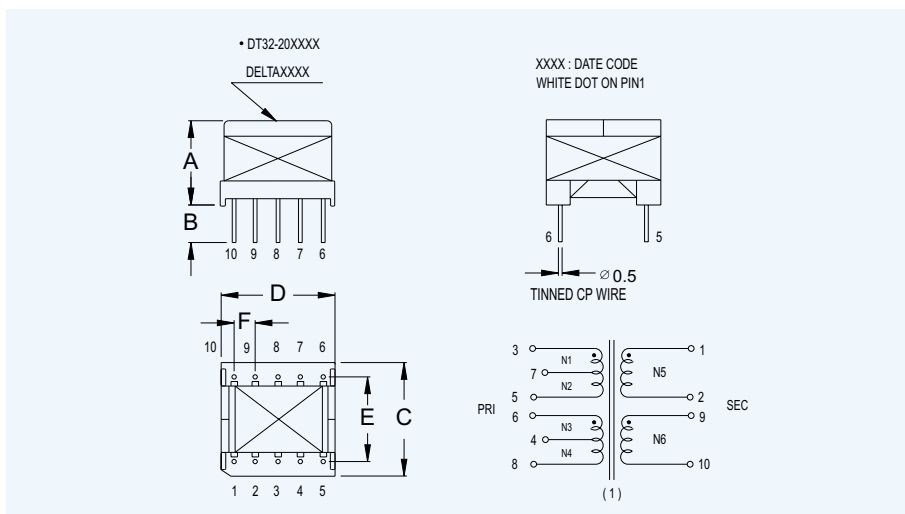

DIMENSIONS IN mm

A	B	C	D	E	F	
12.7 MAX.	2.79 MIN.	14.0 MAX.	14.0 MAX.	10.16±0.3	2.54±0.3	

ELECTRICAL CHARACTERISTICS

T.R	1:1:1:1:2:2±3% (N1:N2:N3:N4:N5:N6) @10KHz 1V
L	SEC: 1025uH ±5% @10KHz 0.1V
L.K	SEC: 10uH Max. @300KHz 0.1V
D.C.R	N1+N2: 0.5Ω Max. N3+N4: 0.5Ω Max. N5: 0.5Ω Max. N6: 0.5Ω Max.
HI-POT	1500 VAC 2 SEC
C	-----
I.L	0.5 dB Max. @300KHz
L.B	45dB Min. @30KHz
FR	±1.0 Max. @30KHz~1.1MHz
R.L	10 dB Min. @30KHz~1.1MHz
T.H.D	-65dB Max. @300KHz 1Vrms
Schematic	1

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 31-1, SHIEN PAN ROAD, KUEI SAN INDUSTRIAL ZONE, TAOYUAN SHIEN, TAIWAN, R.O.C.

TEL: 886-3-3626301 FAX: 886-3-3618901

http://www.deltaww.com