





Telecommunication



ADSL Transformer

Transformers

DT32-2005



XXXX : DATE CODE
BLACK DOT ON PIN 1

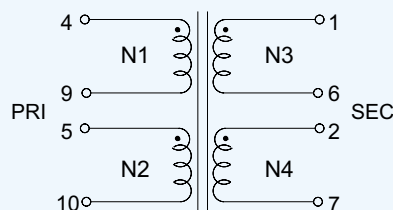

DIMENSIONS IN mm

A	B	C	D	E	F	G
13.5 MAX.	3.5±0.3	15.0 MAX.	16.0 MAX.	10.16±0.3	2.54±0.2	

ELECTRICAL CHARACTERISTICS

URNS RATIO	1 : 1±1% @10KHz, 0.1V
INDUCTANCE	25.5 mH Min. @10KHz, 0.1V
D.C. RESISTANCE	1-6: 0.71 Ω Max. 4-9: 0.82 Ω Max. 2-7: 0.73 Ω Max. 5-10: 0.86 Ω Max.
INTERWINDING CAPACITANCE	40 pF Max. @10KHz, 1V
INSERTION LOSS	0.5 dB Max. @1KHz ~ 50KHz, 0 dBm 1.0 dB Max. @1MHz, 0 dBm
FREQUENCY RESPONSE	± 1.0 dB @1KHz ~ 1MHz
LONGITUDINAL BALANCE	52 dB Min. @1KHz ~ 500KHz
DIELECTRIC STRENGTH	500 VAC, 60 SEC @PRI TO SEC

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 31-1, SHIEN PAN ROAD, KUEI SAN INDUSTRIAL ZONE, TAOYUAN SHIEN, TAIWAN, R.O.C.

TEL: 886-3-3626301 FAX: 886-3-3618901

<http://www.deltaww.com>